



(51) International Patent Classification:

B66C 23/18 (2006.01) *F03D 11/04* (2006.01)
B66C 23/52 (2006.01) *F03D 1/00* (2006.01)

(21) International Application Number:

PCT/IB2013/061198

(22) International Filing Date:

20 December 2013 (20.12.2013)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

2012/0865 20 December 2012 (20.12.2012) BE
2013/0215 28 March 2013 (28.03.2013) BE

(71) Applicant: **HIGH WIND N.V.** [BE/BE]; Haven 1025,
Scheldedijk 30, B2070 Zwijndrecht (BE).

(72) Inventor: **CLYMANS, Etiënne**; Peeterstraat 43, B2830
Willebroek (BE).

(74) Agent: **BROUWER, Hendrik, Rogier**; Arnold &
Siedsma, Sweelinckplein 1, NL-2517 GK Den Haag (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: DEVICE AND METHOD FOR PLACING COMPONENTS OF A STRUCTURE

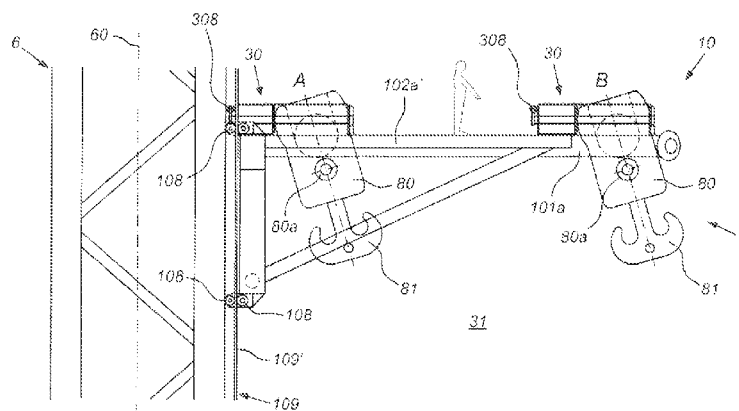


Fig. 2B

(57) Abstract: Device (10) for placing components of a structure, in particular a wind turbine comprising hoisting means placed on a surface, a boom (6) of which is provided with a hoisting cable with attaching means for a component for placing, wherein a lifting plane is defined by the boom (6) and the free-hanging hoisting cable (7). The boom comprises a guide device (10) for the attaching means, wherein the guide device (10) is connected to the boom (6) by means of a displacing device (8) displaceable along a longitudinal axis of the boom (6). The guide device (10) is configured to limit movement of the attaching means in a direction running transversely of the lifting plane, and further comprises a catching construction (30) configured to receive and displace the attaching means parallel to the lifting plane between a position in the vicinity of the boom (6) and a position further removed from the boom (6) and/or vice versa. The invention likewise relates to a method which makes use of the invented device.

