

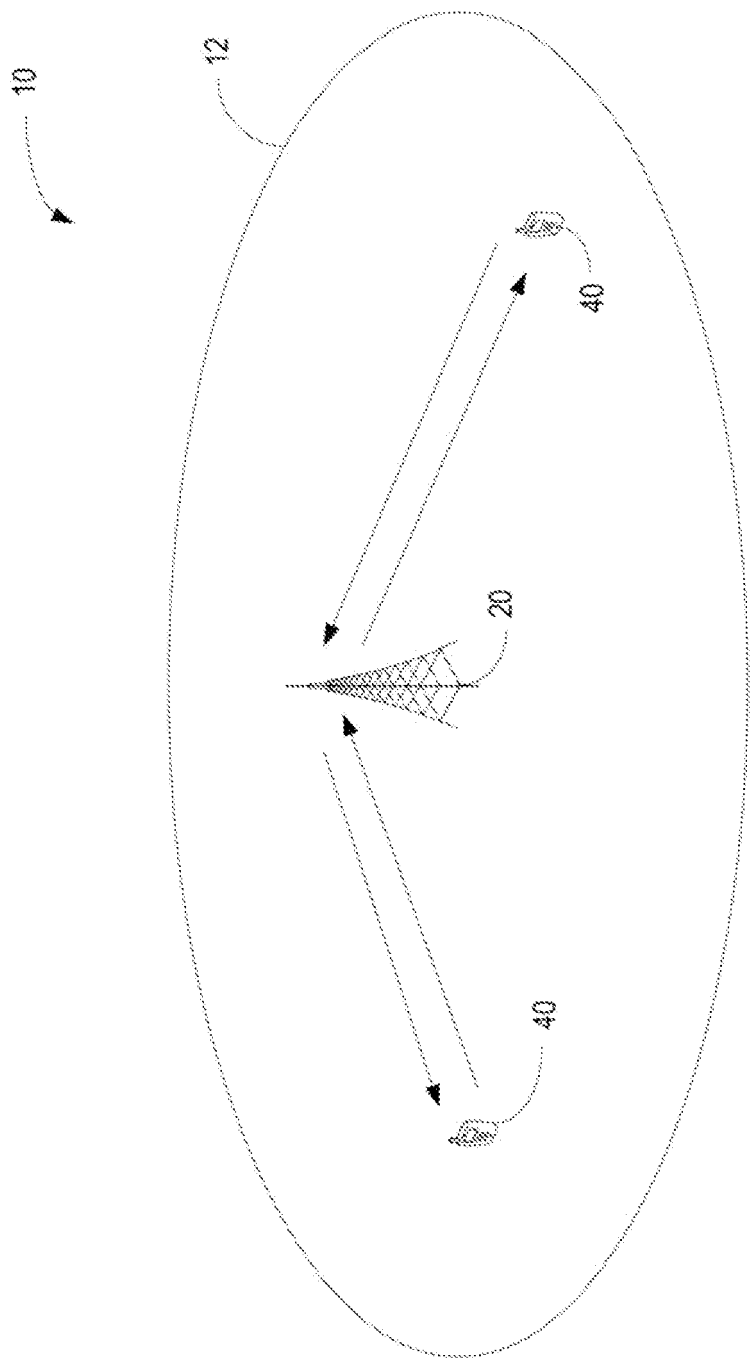


FIG. 1

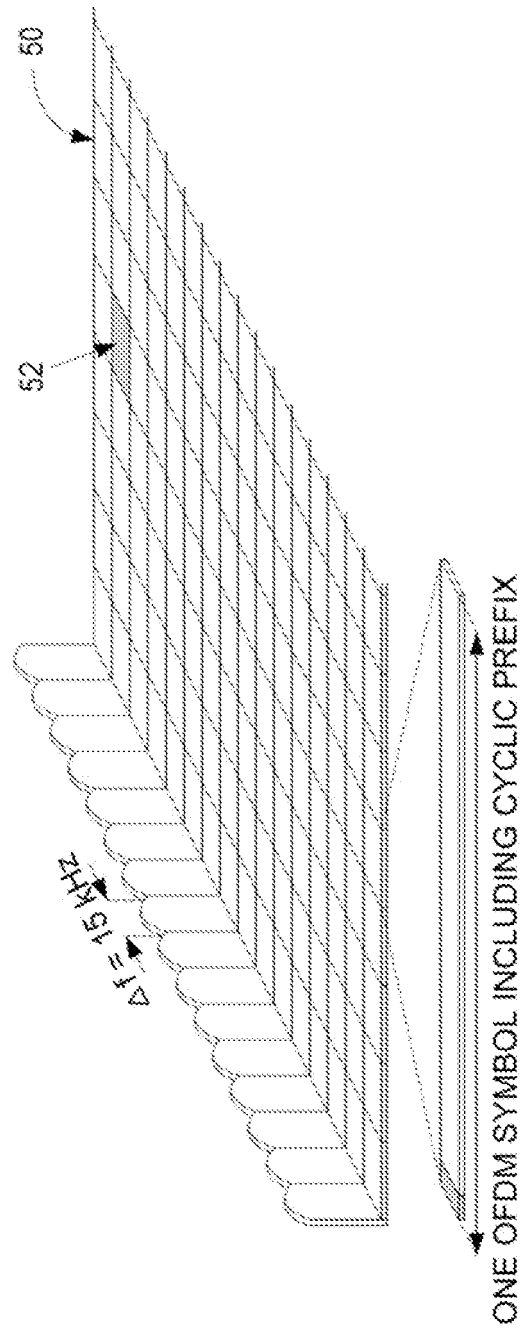


FIG. 2

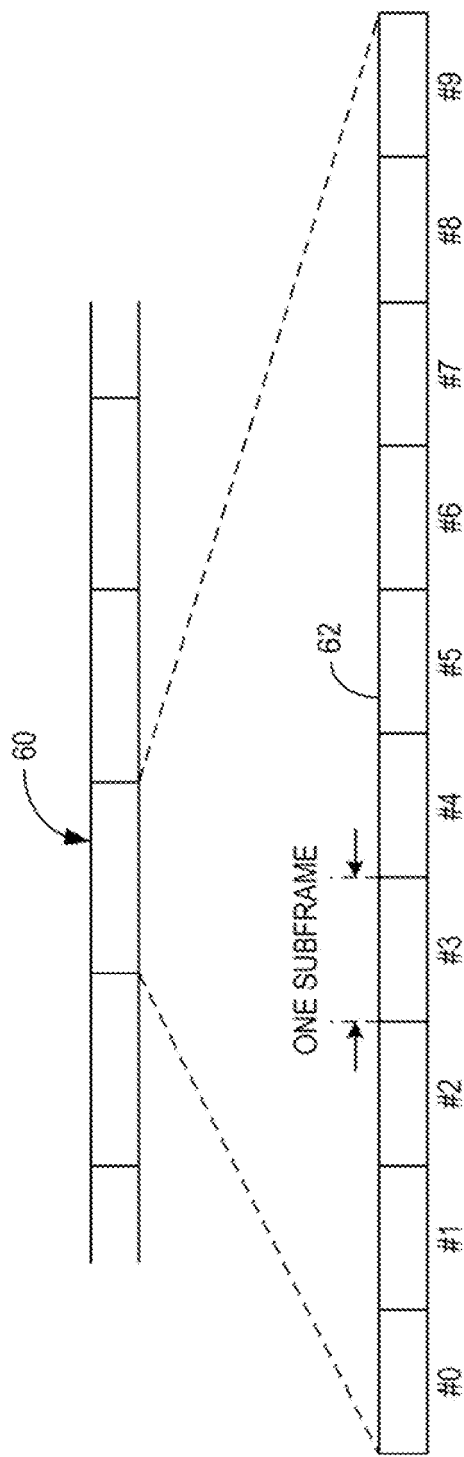


FIG. 3

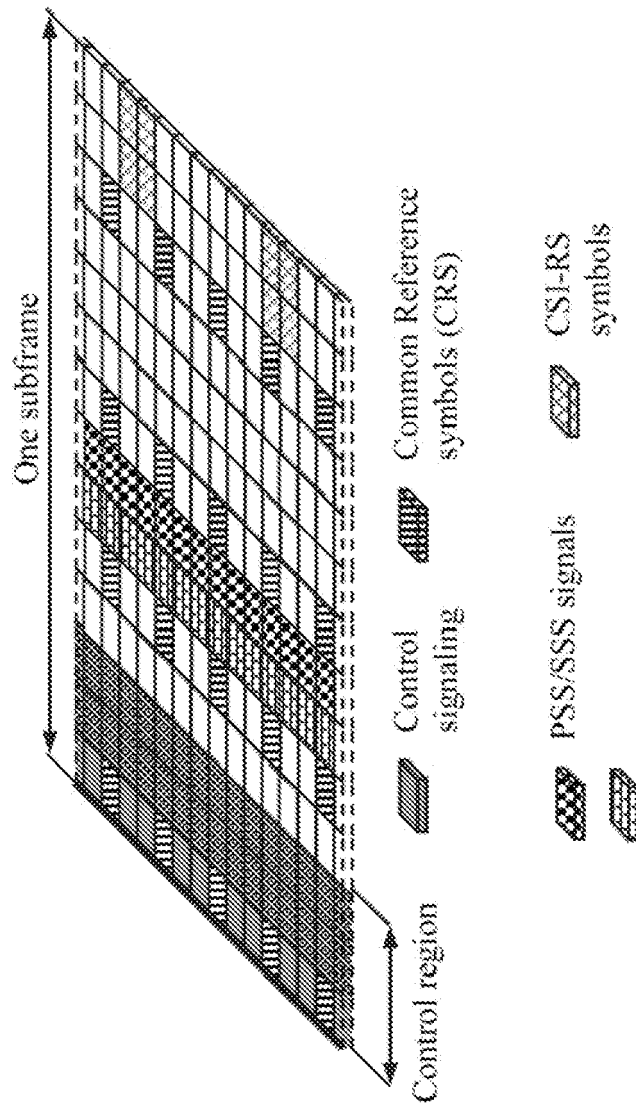


FIG. 4

5 / 15


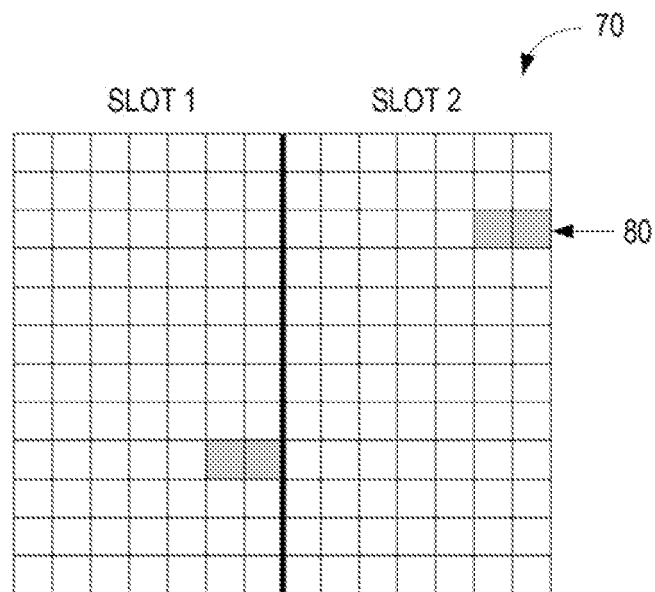


FIG. 5



-  SUBFRAME CONTAINING TWO CONFIGURATIONS,
USED TO ESTIMATE DOPPLER
-  SUBFRAME CONTAINING ONE CONFIGURATION

FIG. 6

6 / 15

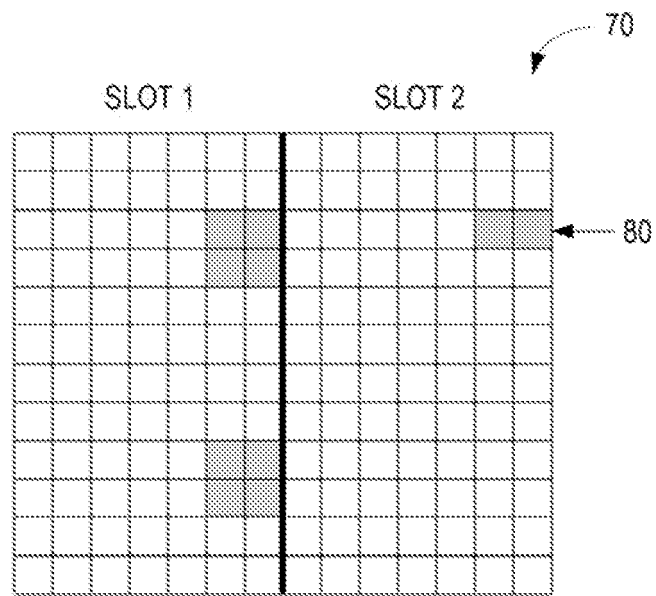


FIG. 7

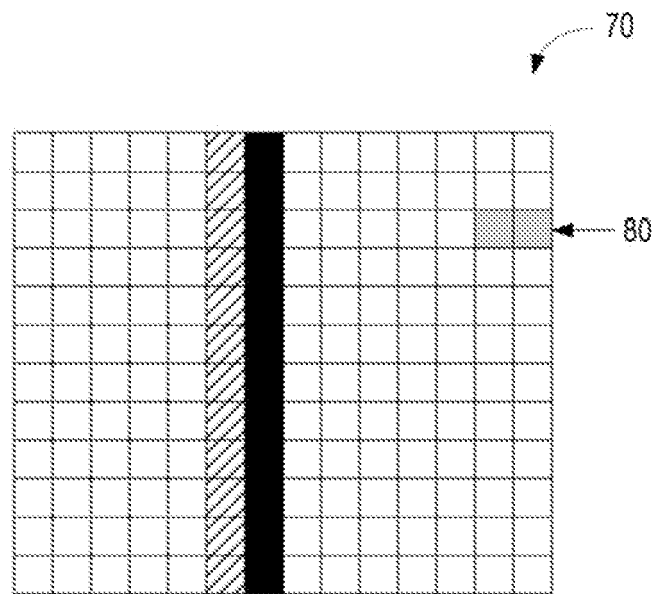


FIG. 8

7 / 15

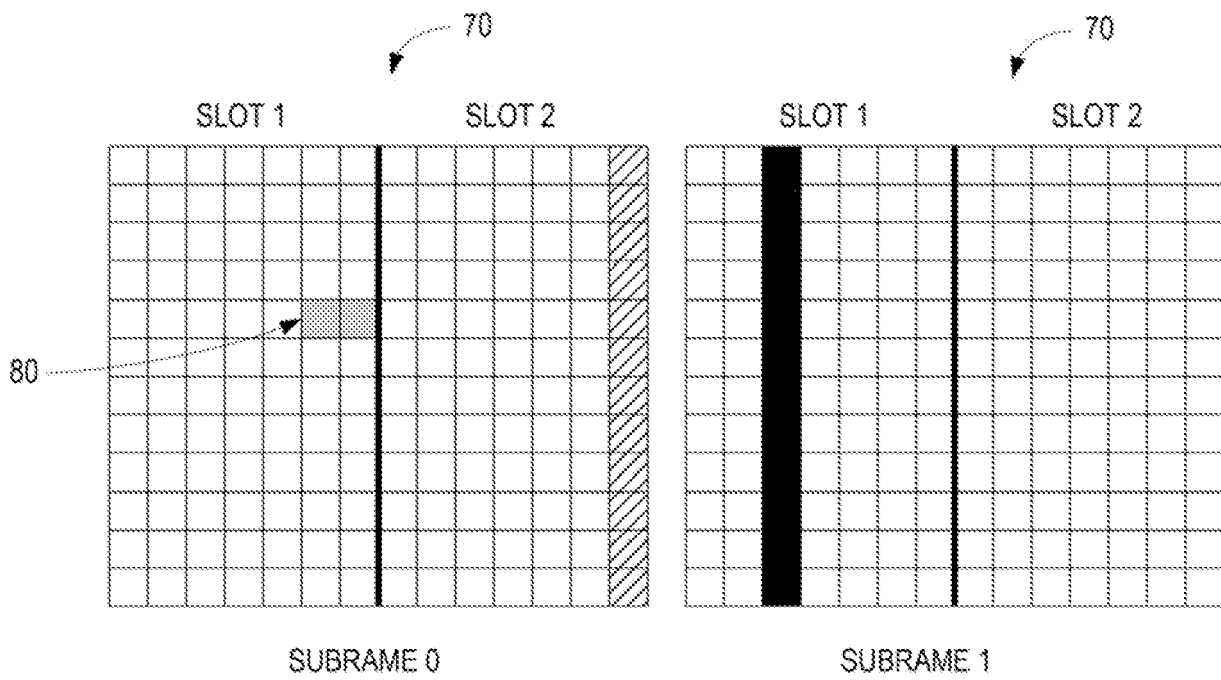


FIG. 9

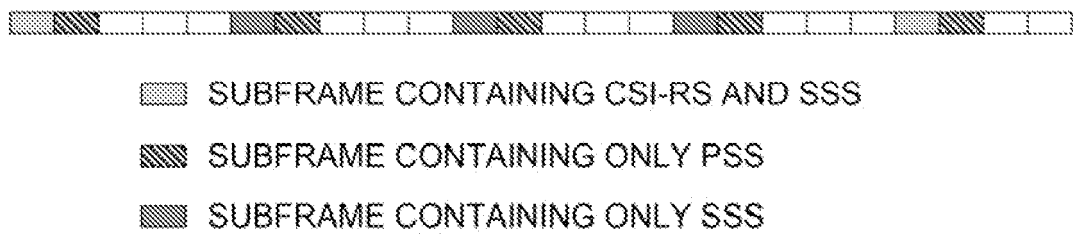


FIG. 10

8 / 15


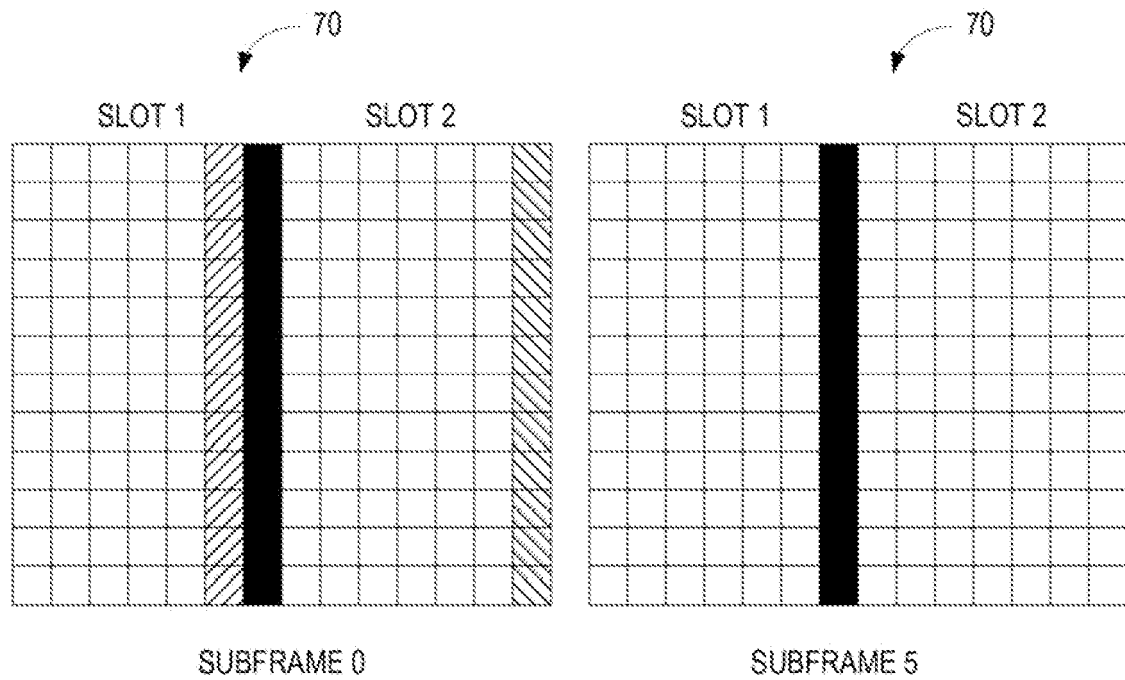


FIG. 11



- SUBFRAME CONTAINING SSS1 AND PSS IN SLOT 1 AND SSS2 IN SLOT 2
- SUBFRAME CONTAINING ONLY PSS IN SLOT 1

FIG. 12

9 / 15

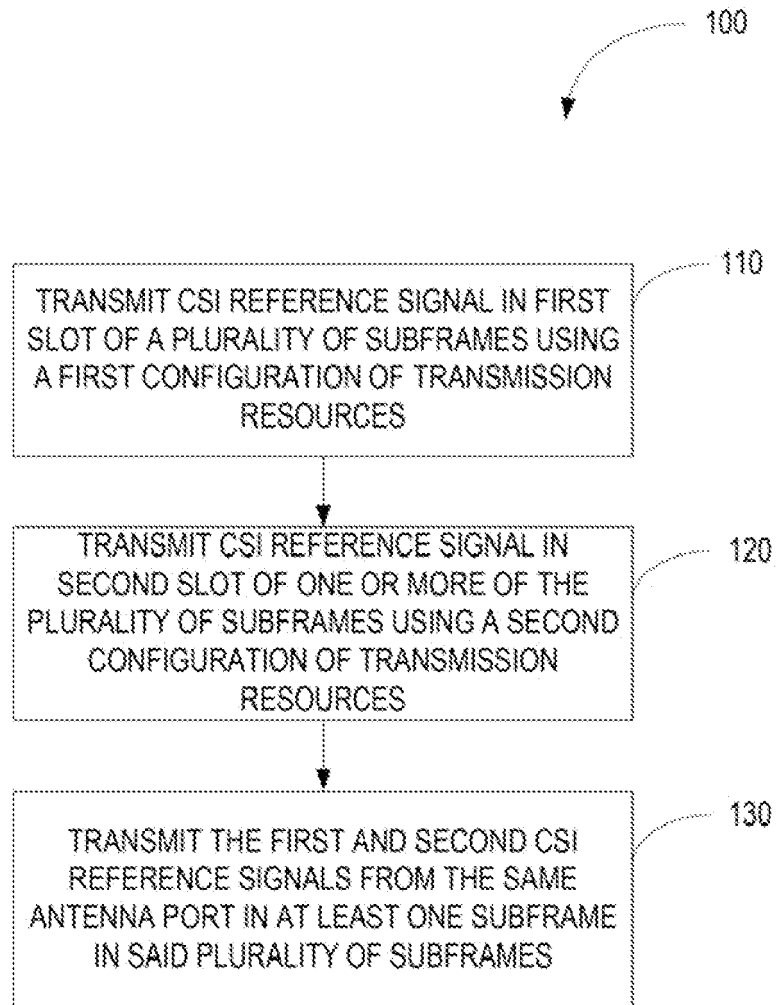


FIG. 13

10 / 15

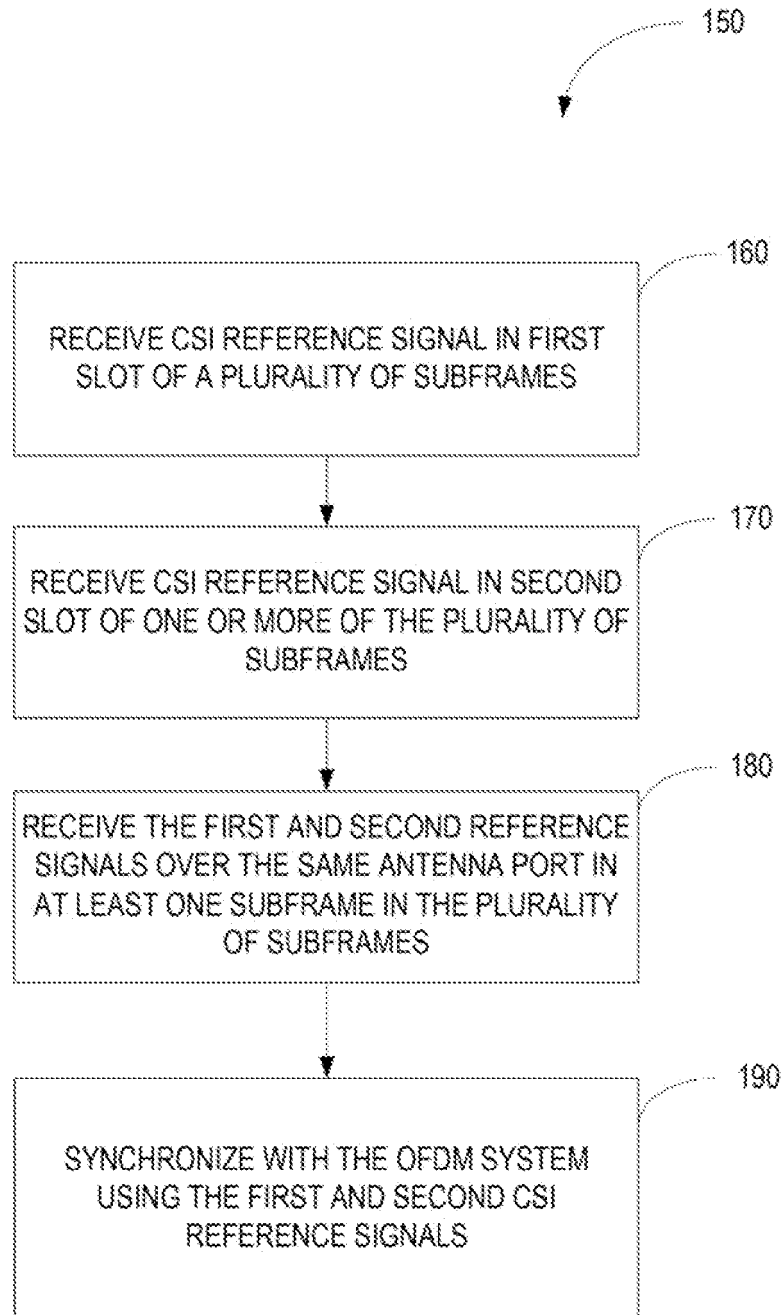


FIG. 14

11 / 15

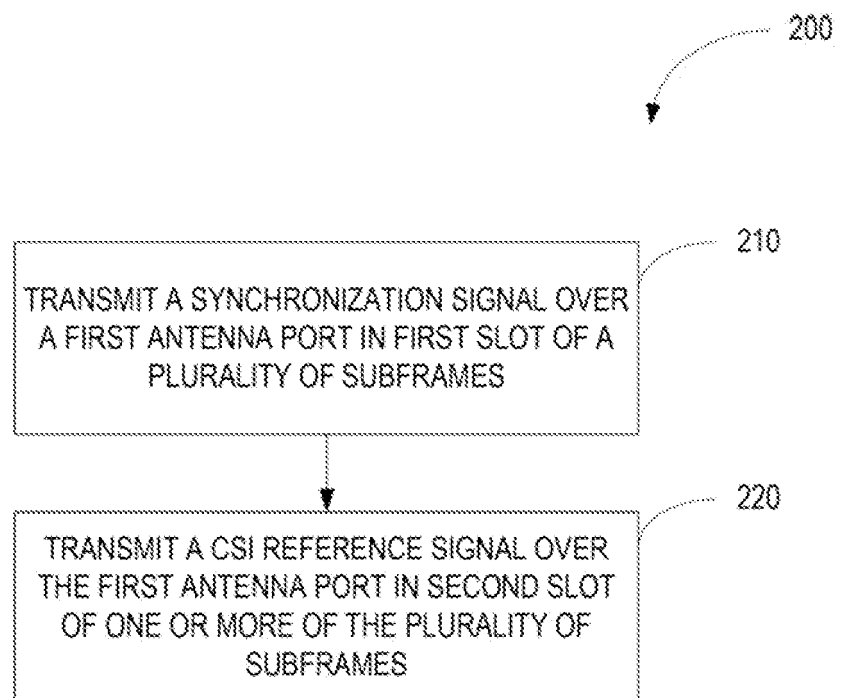


FIG. 15

12 / 15

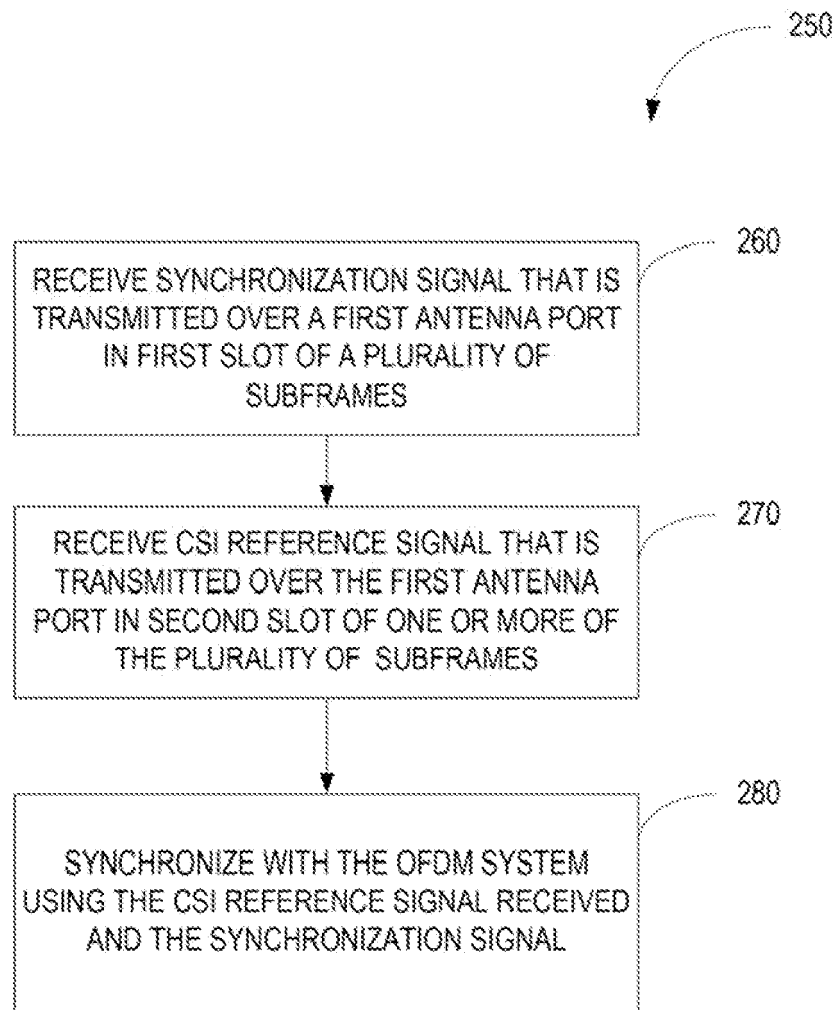


FIG. 16

13 / 15

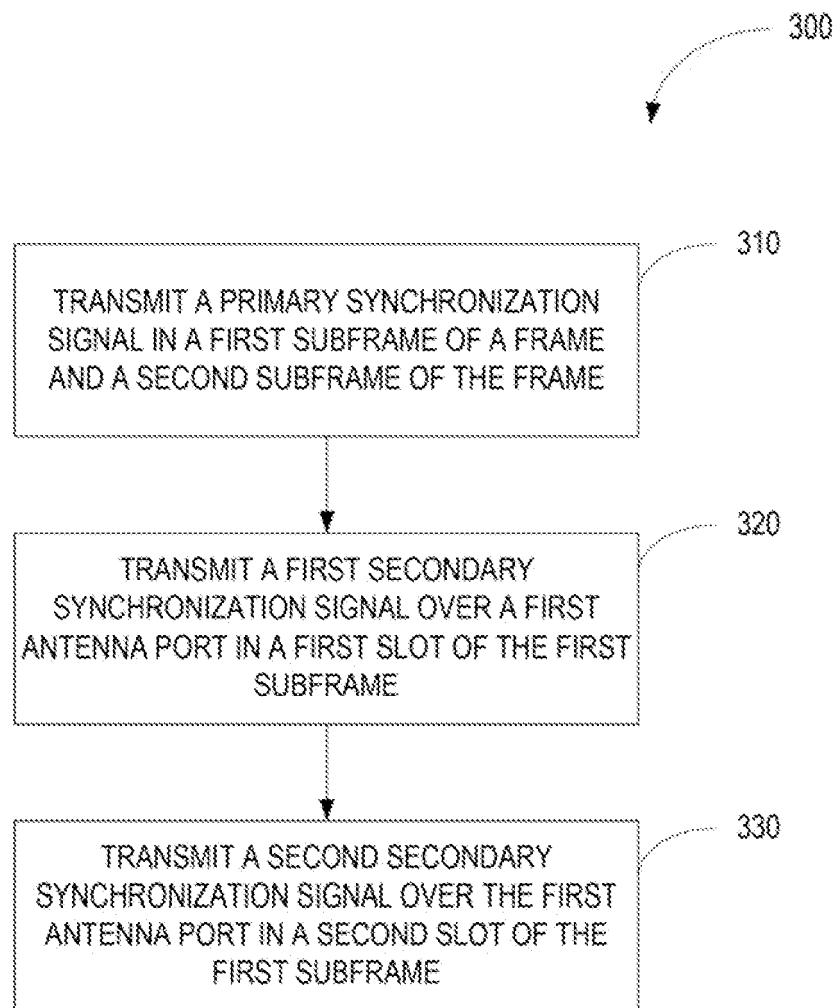


FIG. 17

14 / 15

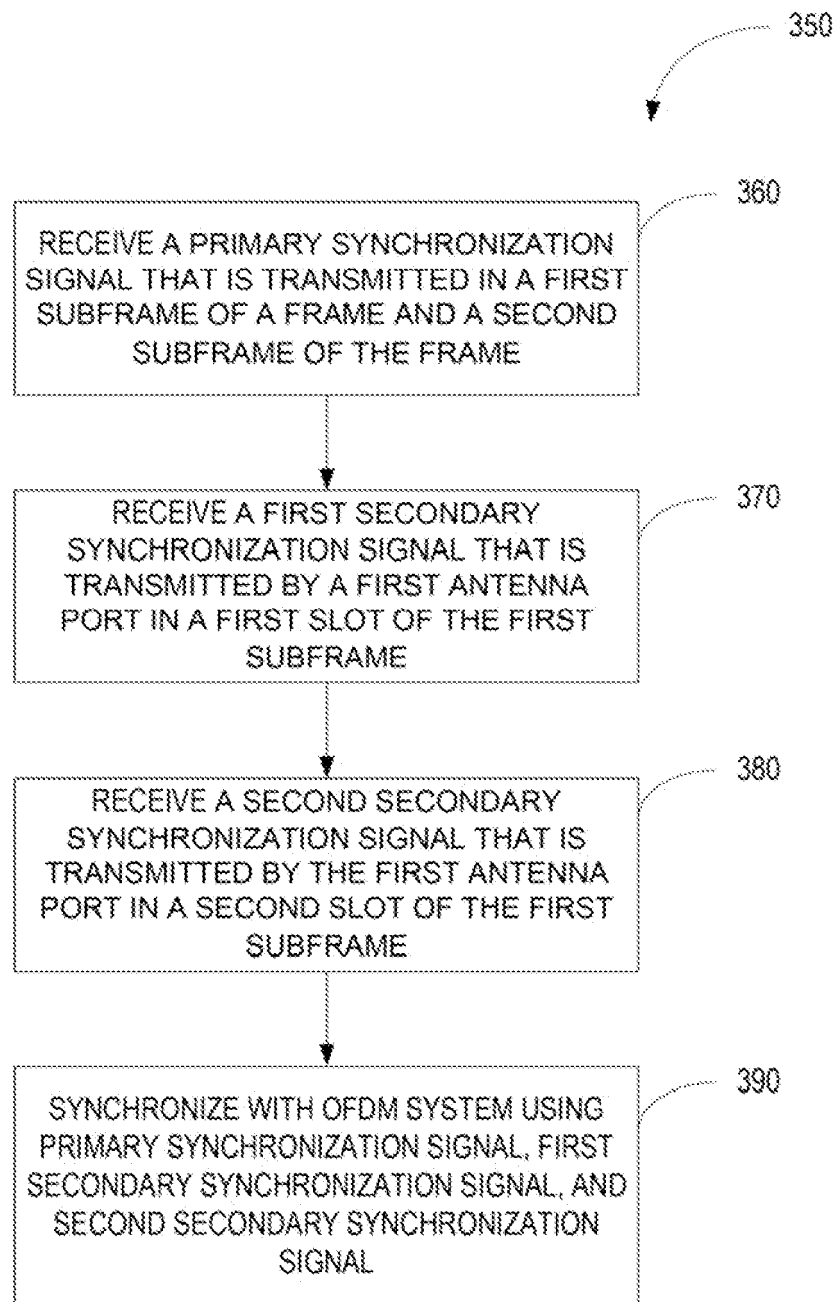


FIG. 18

15 / 15

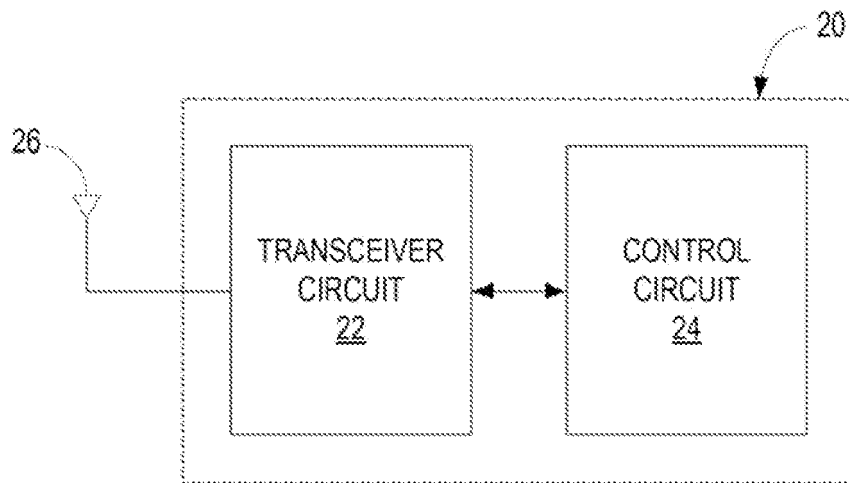


FIG. 19

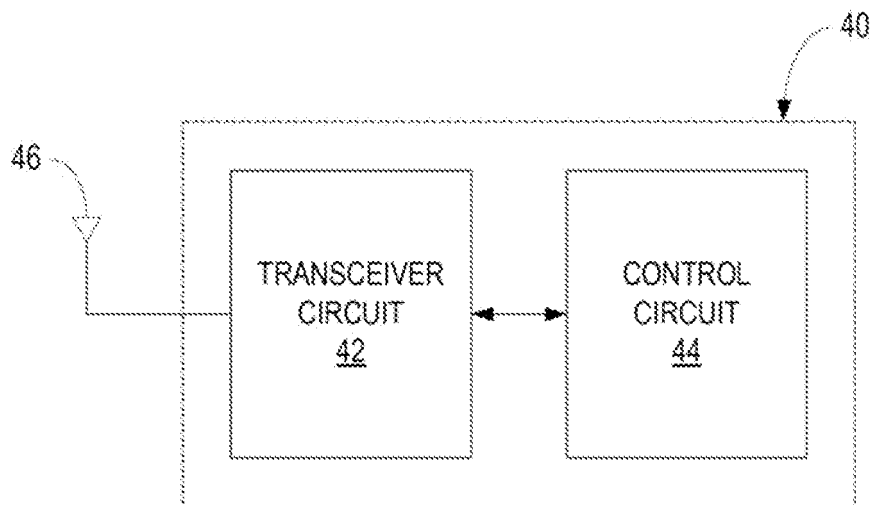


FIG. 20