

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 October 2001 (11.10.2001)


PCT

(10) International Publication Number
WO 01/076080 A3

- (51) International Patent Classification⁷: **H03M 13/41** (72) Inventors: **NEUFELD, Arthur, James**; 12161 Middlebrook Square, San Diego, CA 92128 (US). **BAYLEY, Gwain**; 8016 Paseo Aliso, Carlsbad, CA 92009 (US).
- (21) International Application Number: PCT/US01/10463
- (22) International Filing Date: 30 March 2001 (30.03.2001) (74) Agents: **WADSWORTH, Philip, R.** et al.; Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (25) Filing Language: English
- (26) Publication Language: English (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (30) Priority Data:
09/539,852 31 March 2000 (31.03.2000) US
- (71) Applicant: **QUALCOMM INCORPORATED** [US/US];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

[Continued on next page]

(54) Title: SLOTTED MODE DECODER STATE METRIC INITIALIZATION

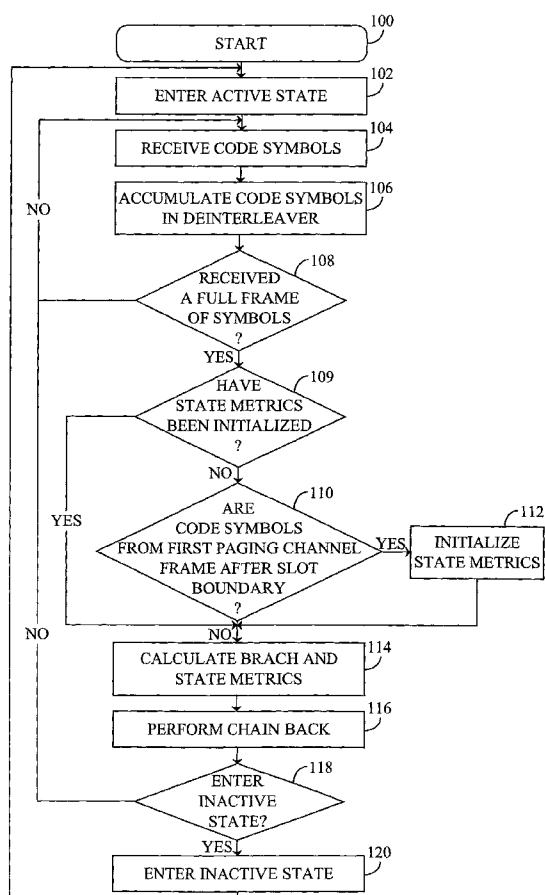

(57) Abstract: A method and apparatus for improving the performance of a convolutional encoder used in a slotted mode communication system. In a typical slotted mode communication system a stream of continuously convolutionally encoded symbols is transmitted by a base station. A remote unit, comprising a convolutional decoder to decode the stream of symbols periodically transits between active and inactive states. While in the inactive state the remote unit misses a portion of the continuous stream of symbols. Following the interruption of the stream of symbols, the state metrics of a trellis within the decoder are initialized. Initialization of the state metrics may be such that the decoding process will be biased towards only valid states and away from invalid states. In addition, the initialization may be such that there is not a bias towards any particular state within the trellis.

WO 01/076080 A3



(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

(88) Date of publication of the international search report:
14 March 2002

(48) Date of publication of this corrected version:

27 December 2002

(15) Information about Correction:

see PCT Gazette No. 52/2002 of 27 December 2002, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.