



- (51) International Patent Classification:
C10L 1/04 (2006.01) *C10L 1/16* (2006.01)
- (21) International Application Number:
PCT/US2013/071034
- (22) International Filing Date:
20 November 2013 (20.11.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/745,670 24 December 2012 (24.12.2012) US
- (71) Applicant: **EXXONMOBIL RESEARCH AND ENGINEERING COMPANY** [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).
- (72) Inventors: **BROWN, Stephen, H.**; 49 Beaver Avenue, Annandale, NJ 08801 (US). **DAVIS, Stephen, Mark**; 71 Summit Trail Lane, Dawsonville, GA 30534 (US). **WANG, Frank, Cheng-yu**; 9 Cambridge Drive, Annandale, NJ 08801 (US). **YUNG, Cathleen**; 3 Sundance Way, Phillipsburg, NJ 08865 (US).
- (74) Agents: **SHANLEY, Matthew, T.** et al.; Exxonmobil Research And Engineering Company, 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HYDROTREATED HYDROCARBON TAR, FUEL OIL COMPOSITION, AND PROCESS FOR MAKING IT

FIG. 1

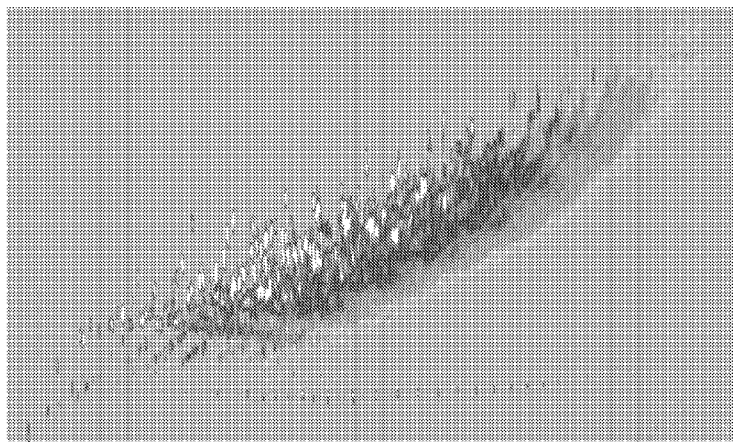

(57) Abstract: Provided is a hydrocarbon tar. The tar has 75 wt% or more of aromatics of (10) carbons to (75) carbons based on the total weight of the tar. The aromatics exhibit 40% to 80% aromaticity. The tar has a boiling point of from 300°F to 1350°F. There is also a fuel oil composition having the tar therein. There are also processes for making the hydrocarbon tar.