

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
26 July 2012 (26.07.2012)



(10) International Publication Number
WO 2012/097407 A8

- (51) International Patent Classification:
H05B 37/02 (2006.01) *F21S 8/00* (2006.01)
- (21) International Application Number:
PCT/AU2012/000035
- (22) International Filing Date:
18 January 2012 (18.01.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2011100078 18 January 2011 (18.01.2011) AU
- (71) Applicant (for all designated States except US): **EN-LIGHTEN AUSTRALIA PTY LTD** [AU/AU]; 7/66 Whiting Road, Artarmon, NSW 2065 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **WHITFIELD, David** [AU/AU]; 7/66 Whiting Road, Artarmon, NSW 2065 (AU).
- (74) Agent: **FRASER OLD & SOHN**; Level 10, 275 Alfred Street, North Sydney, NSW 2060 (AU).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report (Art. 21(3))

(88) Date of publication of the international search report:
10 January 2013

(48) Date of publication of this corrected version:
26 September 2013

[Continued on next page]

(54) Title: LIGHTING SYSTEM

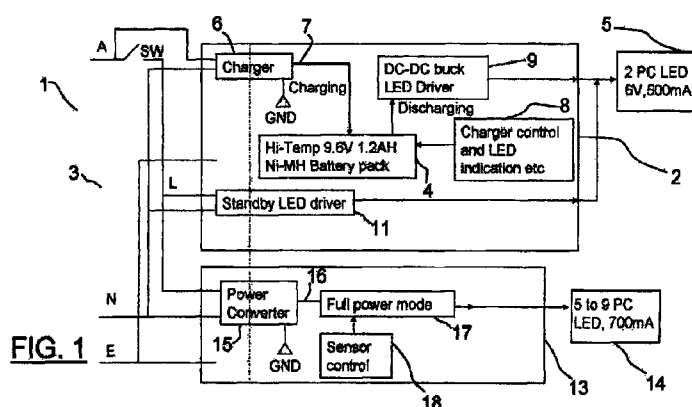

(57) Abstract: A lighting system (1) has a first lighting circuit (2) configured to provide a first predetermined level of lighting intensity. The first lighting circuit (2) is configured to receive power from a mains electricity supply (3) or from a battery source (4) if the mains supply is unavailable. The first lighting circuit (2) is connected to at least one first Light source (5) and configured, when actuated, to provide lighting at the first predetermined level of lighting intensity. At this time, the first light source is in either an on or off state or a level of light required to raise ambient light level above a predetermined level. The system (1) further has a second lighting circuit (13) configured to provide lighting at least a second predetermined level of lighting intensity. The second lighting circuit (13) is configured to receive power from the mains electricity supply (3) and is connected to at least one second light source (14). The second lighting circuit (13) has at least one sensor (18) with an input such that actuation thereof causes the second light source (14) to provide the second predetermined level of lighting intensity for a predetermined period of time, in response to ambient illumination meeting or exceeding a predetermined intensity, when said sensor has no input or has had no input for a predetermined period of time, or until re-set. In the system (1), the second predetermined level of lighting intensity is greater than said first predetermined level of lighting.



-
- (15) Information about Correction:**
see Notice of 26 September 2013