

(51) International Patent Classification:
H04W 24/02 (2009.01)

(21) International Application Number:

PCT/US2013/020857

(22) International Filing Date:

9 January 2013 (09.01.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/584,667	9 January 2012 (09.01.2012)	US
13/735,956	7 January 2013 (07.01.2013)	US

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
Attn: International IP Administration, 5775 Morehouse
Drive, San Diego, CA 92121-1714 (US).(72) Inventors: **SAMPATH, Hemanth**; 5775 Morehouse
Drive, San Diego, CA 92121-1714 (US). **WENTINK,
Maarten Menzo**; 5775 Morehouse Drive, San Diego, CA
92121-1714 (US). **MERLIN, Simone**; 5775 Morehouse
Drive, San Diego, CA 92121-1714 (US).(74) Agent: **BELADI, Sayed H.**; Attn: International IP Admin-
istration, 5775 Morehouse Drive, San Diego, CA 92121-
1714 (US).(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

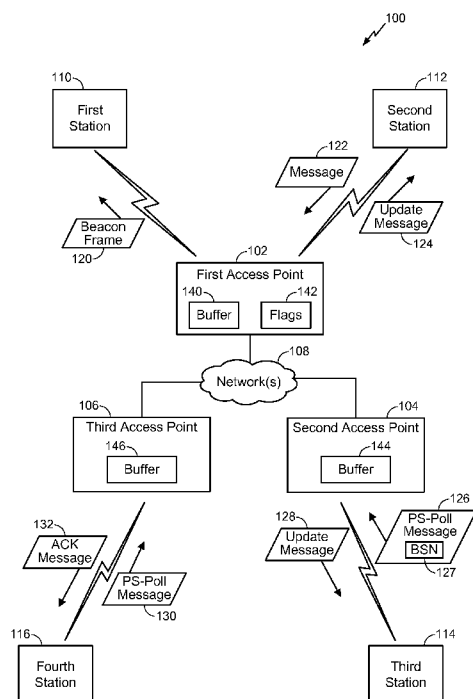
(54) Title: SYSTEMS AND METHODS TO TRANSMIT CONFIGURATION CHANGE MESSAGES BETWEEN AN ACCESS
POINT AND A STATION

FIG. 1

(57) Abstract: A particular method includes transmitting a frame from a sta-
tion to an access point. The frame includes a beacon sequence number related
to a configuration of the access point. The method also includes, in response
to transmitting the frame, receiving an update frame from the access point.
The update frame indicates at least one change in the configuration of the ac-
cess point.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

(88) Date of publication of the international search report:

26 September 2013