



(51) International Patent Classification:
B60B 7/01 (2006.01) **B60B 7/06** (2006.01)

(21) International Application Number:
PCT/NZ2009/000107

(22) International Filing Date:
16 June 2009 (16.06.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
571573 29 September 2008 (29.09.2008) NZ

(71) Applicant (for all designated States except US): **RIM-PRO-TEC LIMITED** [NZ/NZ]; Unit B, 89 Ellice Road, Glenfield, Auckland 0629 (NZ).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHESTER, Christopher, John** [GB/NZ]; 59 Bawden Road, Dairy Flat, Auckland 1060 (NZ). **CHESTER, Deborah** [GB/NZ]; 59 Bawden Road, Dairy Flat, Auckland 1060 (NZ).

(74) Agents: **LUCAS, Jennifer, A.** et al.; James & Wells Intellectual Property, Private Bag 3140, Hamilton 3240 (NZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: VEHICLE WHEEL PROTECTION DEVICE

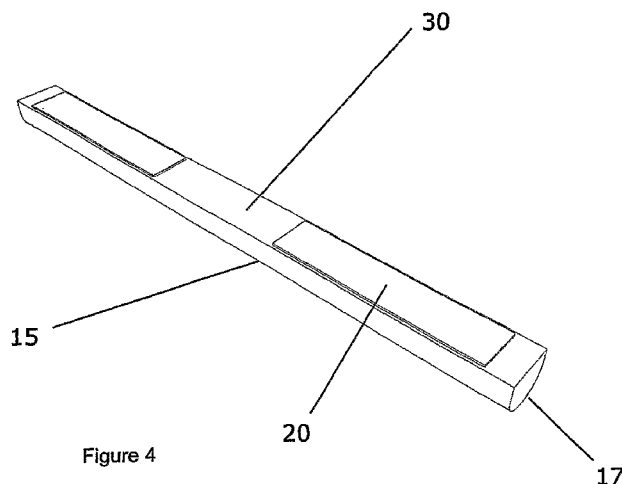


Figure 4

(57) Abstract: This invention relates to a vehicle wheel protection device (7) and a method for protecting wheels from kerbing. The wheel protection device (7) includes an elongate member (30) or plurality of elongate members (30) capable of being attached using an adhesive (20) to the side wall of a tyre, or the front face of a wheel rim or wheel trim.

