

PROCESS FOR ISOLATION OF A CATALYST
CONTAINING PALLADIUM

The present invention relates to the isolation of a palladium-based catalyst from a mixture
5 in which it is dissolved.

More specifically, the invention relates to the isolation of a palladium-based catalyst from a mixture originating from the reaction of hydroxycarbonylation of butadiene to pentenoic acids.

10 One of the objectives of the process of the invention lies in the isolation of at least a proportion of the catalyst containing palladium which is dissolved in the form of organometallic complex in the mixture to be treated, in order to enable this
15 catalyst containing palladium to be recycled into a new butadiene hydroxycarbonylation reaction.

A second objective of the process is to make it possible to isolate at least a proportion of the pentenoic acids present in the said mixture.

20 The hydroxycarbonylation of butadiene and/or of its derivatives, such as especially the allylbutenols like 3-buten-2-ol, 2-buten-1-ol and their mixtures, the compounds of addition of hydrogen chloride to butadiene (chlorobutenes), the main one of
25 which is crotyl chloride, can be performed using water and carbon monoxide at a pressure that is higher than atmospheric pressure and in the presence of a catalyst containing palladium, soluble in the reaction mixture.






Reference may be made, for example, to Patent EP-A-0 648 731 for a more detailed description of such a technique, although the present invention is not limited to the treatment of reaction mixtures
5 originating from the process according to this patent.

The reaction mixtures used in the process of the invention contain more or less considerable quantities of the compounds involved in the hydroxycarbonylation reaction and of the compounds
10 formed during this reaction.

Apart from the palladium catalyst, which may be present in various chemical forms, the reaction mixture contains the pentenoic acids formed, especially 3-pentenoic acid, water, hydrochloric acid, in most
15 cases also reaction by-products like butenes or valeric acid, dicarboxylic acids like adipic acid, 2-methylglutaric acid and 2-ethylsuccinic acid, optionally butadiene which has not been converted and any optional solvent used in the reaction.

20 The invention consists therefore of a process for isolation of at least a proportion of the palladium dissolved in a solution also containing at least 3-pentenoic acid, characterized in that the said solution is acidified and stirred with an aqueous
25 solution of hydrochloric acid, and in that two liquid phases are obtained, including an aqueous phase containing at least a proportion of the palladium.

When the solution to be treated originates



directly from a butadiene hydroxycarbonylation operation, it is obviously necessary to eliminate the carbon monoxide pressure before the acidification.

The aqueous solution of hydrochloric acid employed generally contains from 5 % to 40 % by weight of hydrochloric acid by weight of solution.

In general the solution of hydrochloric acid is added in a proportion of 0.1 to 2 times the volume of the solution to be treated.

The formation of two liquid phases during the acidification may originate simply from the addition of the aqueous solution of hydrochloric acid according to the composition of the solution to be treated.

This is particularly, but not exclusively, the case when the solution to be treated contains an essentially water-immiscible solvent such as an aromatic, aliphatic or cycloaliphatic hydrocarbon or a chlorinated aromatic, chlorinated aliphatic or chlorinated cycloaliphatic hydrocarbon.

Separation into two liquid phases may also be obtained by the addition of a water-immiscible organic solvent. This addition may be performed after the acidification, at the time of the acidification or, if appropriate, before the acidification.

The presence of a water-immiscible organic solvent makes it possible to extract at least a proportion of the pentenoic acids present in the solution to be treated.

The temperature at which the solution to be treated is acidified is not really critical for making use of the process. It is thus possible to operate between 0°C and 230°C (temperature at which the
5 previous hydroxycarbonylation reaction may be conducted). In practice, however, the operation will take place between 20°C and 200°C and preferably between 40°C and 110°C.

The acidification with hydrochloric acid
10 allows the palladium present in the form of organometallic complex in the solution to be treated to be converted into palladium dihydrotetrachloride. The temperature at which the operation is performed affects the rate of this conversion of the palladium compounds,
15 a higher temperature accelerating this conversion, but running the risk of precipitating a proportion of the palladium.

The organic solvent employed for performing the extraction is chosen advantageously from aromatic,
20 aliphatic or cycloaliphatic hydrocarbons and chlorinated aromatic, chlorinated aliphatic or chlorinated cycloaliphatic hydrocarbons which are liquid in the operating conditions and are essentially immiscible with water.

25 For convenience, the boiling point of the organic solvent will be lower than that of 3-pentenoic acid.

Nonlimiting examples of these solvents which

may be mentioned are benzene, toluene, xylenes, chlorobenzenes, cyclohexane, butadiene, butenes, alkanes such as hexanes, heptanes, octanes, nonanes, decanes, undecanes, dodecanes, and the various mixtures of several of these solvents.

The mixture obtained after acidification of the solution to be treated and, if appropriate, after addition of the organic solvent and stirring, separates at rest into an organic phase and an aqueous phase.

As in the case of the acidification, the extraction with the organic solvent may be performed at a temperature situated between 0°C and 230°C, more often between 20°C and 200°C and preferably between 40°C and 110°C.

The organic phase contains more than half of the initial quantity of pentenoic acids, most of the butadiene and of the butenes and a proportion of the dicarboxylic acids which may be present in the solution to be treated.

The aqueous phase contains more than half of the quantity of palladium as well as a proportion of the dicarboxylic acids which may be present in the solution to be treated.

The operation of extraction with the aid of an organic solvent may be repeated a number of times if desired.

Depending on the organic solvent employed, the quantity of pentenoic acids in the organic phase

may exceed 60 % and even 75 % of the quantity initially present in the solution to be treated. The pentenoic acids, and more particularly 3-pentenoic acid, may next be isolated from the organic phase by the usual means of chemistry.

The aqueous phase generally contains more than 60 % and preferably more than 80 % of the palladium initially present in the solution to be treated. With the process of the invention it is even possible to recover in the aqueous phase up to virtually all of the palladium.

The aqueous phase containing the palladium may advantageously be recycled into a new butadiene hydroxycarbonylation reaction. It is generally desirable to distil off beforehand a proportion of the hydrochloric acid which it contains so as to adjust the quantity of hydrochloric acid to the quantity which it is convenient to have for the hydroxycarbonylation. A solution of hydrochloric acid corresponding to the water/hydrogen chloride azeotrope is obtained by such a distillation. In the context of a continuous industrial process it is particularly advantageous to employ the hydrochloric acid solution thus obtained for acidifying the initial solution to be treated, after addition of the top-up which may be necessary.

An alternative form of the process of the invention consists in distilling off at least a proportion of the pentenoic acids from the solution to

be treated before carrying out the acidification.

Such a distillation will be performed at a temperature lower than or equal to 110°C. This temperature restriction is important because it has
5 been observed that, if the operation is carried out at a higher temperature, a proportion of the palladium precipitates. Even when partial, such a precipitation is unacceptable in an industrial process. In effect, it gives rise to losses of a very costly metal and in
10 addition it seriously complicates the treatment of the reaction mixtures.

Unexpectedly, if the operation is carried out at a temperature which is lower than or equal to 110°C, and still more preferably at a temperature which is
15 lower than or equal to 105°C, no precipitation of palladium is observed.

In order to be able to conform to this upper temperature limit, it sometimes suffices to operate at atmospheric pressure. More often, it is necessary to
20 distil the pentenoic acids at a pressure that is lower than atmospheric pressure, generally of the order of 2 kPa to 7 kPa.

The lighter compounds which may be present in the solution to be treated also distil off with the
25 pentenoic acids, like, to give examples, butadiene, butenes, water, possibly a proportion of the dicarboxylic acids and the solvent which may be present.

The residue obtained after this distillation contains the palladium and the heavier compounds, like another proportion of the dicarboxylic acids. This residue is next treated as described above, with the aid of an aqueous solution of hydrochloric acid generally containing from 5 % to 40 % by weight of hydrochloric acid by weight of solution. It is not essential to perform the extraction with the aid of an organic solvent as in the first alternative form which has been described.

As already stated, the temperature at which the solution to be treated is acidified may lie between 0°C and 230°C, in practice between 20°C and 200°C and preferably between 40°C and 110°C.

The acidified aqueous solution containing the palladium may be recycled into a new butadiene hydroxycarbonylation reaction as previously, if appropriate after distillation of the excess hydrochloric acid.

In an equivalent quantity, recycled palladium exhibits a catalytic activity similar to that observed with a new catalyst.

Besides the recycling, in a homogeneous form, of the catalyst containing palladium and the isolation of at least a proportion of the pentenoic acids formed, the process of the invention permits the removal of a proportion of the by-products of the butadiene hydroxycarbonylation reaction, especially of the

dicarboxylic acids, the accumulation of which can prove to be detrimental for the said butadiene hydroxycarbonylation reaction.

The examples which follow illustrate the invention.

EXAMPLES 1 TO 3

The following are placed successively in a magnetically stirred round bottom flask:

- 67 mg of PdCl_2
- 360 mg of 37% HCl
- 8 g of 3-pentenoic acid (P3)
- 9 g of 2-methylglutaric acid
- 3 g of 2-ethylsuccinic acid

20 ml of HCl at a concentration of 10 % by weight in water and 20 ml of an organic solvent (shown in Table 1 below) are added next. The mixture is left stirred at ambient temperature for 30 minutes. The two phases are separated by settling and the palladium in these two phases is determined. In all cases no precipitate is observed. The results of the determinations are brought together in Table 1.

Examples	Organic solvent	Pd: % in the aqueous phase	Pd: % in the organic phase
Example 1	toluene	100	0
Example 2	cyclohexane	84	16
Example 3	dodecane	80	20

5

Table 1EXAMPLES 4 TO 7

The following are placed successively in a magnetically stirred round bottom flask:

10

- 66.8 mg of π -crotyl-Pd-Cl
- 242 mg of chlorobutene
- 8.02 g of 3-pentenoic acid (P3)
- 9.04 g of 2-methylglutaric acid
- 3 g of 2-ethylsuccinic acid.

15

The whole is heated to 50°C to obtain a homogeneous solution and then returned to a temperature T°C.

20 g of a solution of HCl in water (HCl concentration C % shown in Table 2) and 20 g of toluene are then added.

20

At the end of stirring for a period which can vary according to the examples, the two phases are separated by settling. Palladium and the organic products are determined in both phases.

The partition coefficients of the various products are the following (ratios of the aqueous layer/organic layer mass fractions) and are brought together in Table 2 below.

5

Examples	HCl C% by weight	T°C	Stir- ring period	Pd	P3	di- acids
Example 4	10	40	90 min	>1300	0.22	1.7
Example 5	10	70	90 min	440	0.28	2.0
Example 6	20	40	60 min	350	0.13	0.9
Example 7	37	45	60 min	700	0.16	0.9

10

Table 2EXAMPLE 8

Example 6 is repeated, 83 mmol of butadiene being additionally passed through the mixture by bubbling during the extraction.

15

The following partition coefficients are obtained:

- Pd = 36
- P3 = 0.13
- diacids = 0.9

20

EXAMPLE 9

The following are charged successively into a 250 ml round bottom flask:

- 1.668 g (9.4 mmol, that is 1 g of Pd) of PdCl_2

- 54.08 g of HCl at a concentration of 37 %
by weight in water

5 - 4.07 g of 3-pentenoic acid
 - H_2O , quantity sufficient for 100 g of
solution.

Distillation is carried out at atmospheric
pressure until approximately 70 ml of distillate
10 (74.15 g) are obtained. This distillate contains 3.2 g
of 3-pentenoic acid. The vapour is at a temperature of
106-107°C and the temperature in the round bottom flask
does not exceed 110°C. No palladium precipitation is
found at all.

15 EXAMPLE 10

A 100 ml single-neck round bottom flask is
charged with a reaction mixture originating from a
butadiene hydroxycarbonylation reaction in the presence
of π -crotylpalladium chloride. This mixture has the
20 following composition:

- 0.0707 g (0.357 mmol) of π -crotylpalladium
chloride
- 0.2706 of chlorobutene (or crotyl chloride)
- 8.0 g of 3-pentenoic acid
25 - 9.1 g of 2-methylglutaric acid
- 3.11 g of 2-ethylsuccinic acid.

To this reaction mixture are added:

- 21 g of dichloroethane

- 21 g of an aqueous solution of hydrochloric acid at a concentration of 20 % by weight.

The round bottom flask, with a condenser fitted on top, is placed in an oil bath.

5 The mixture is kept stirred at 40°C for 1 h.

After stopping the stirring and separation by density, samples are taken from both of the liquid phases obtained, to determine the palladium.

10 Practically all the palladium present in the starting mixture is found again.

The aqueous phase/organic phase mass partition coefficient is 32.

CLAIMS

1. Process for isolation of at least a proportion of the palladium dissolved in a solution also containing at least 3-pentenoic acid,
5 characterized in that the said solution is acidified and stirred with an aqueous solution of hydrochloric acid, and in that two liquid phases are obtained, including an aqueous phase containing at least a proportion of the palladium.
- 10 2. Process according to Claim 1, characterized in that the aqueous solution of hydrochloric acid employed contains from 5 % to 40 % by weight of hydrochloric acid by weight of solution.
- 15 3. Process according to either of Claims 1 and 2, characterized in that the aqueous solution of hydrochloric acid is added in a proportion of 0.2 to 2 times the volume of the solution to be treated.
- 20 4. Process according to one of Claims 1 to 3, characterized in that the formation of two liquid phases during the acidification originates simply from the addition of the aqueous solution of hydrochloric acid.
- 25 5. Process according to Claim 4, characterized in that the solution to be treated contains an essentially water-immiscible solvent such as an aromatic, aliphatic or cycloaliphatic hydrocarbon or a chlorinated aromatic, chlorinated aliphatic or chlorinated cycloaliphatic hydrocarbon.





6. Process according to one of Claims 1 to 3, characterized in that the separation into two liquid phases is obtained by the addition of a water-immiscible organic solvent, an addition performed after the acidification, at the time of the acidification or, if appropriate, before the acidification.

7. Process according to Claim 6, characterized in that the organic solvent added in order to perform the extraction is chosen from aromatic, aliphatic or cycloaliphatic hydrocarbons and chlorinated aromatic, chlorinated aliphatic or chlorinated cycloaliphatic hydrocarbons which are liquid in the operating conditions and are essentially water-immiscible.

8. Process according to either of Claims 6 and 7, characterized in that the organic solvent is chosen from benzene, toluene, xylenes, chlorobenzenes, cyclohexane, butadiene, butenes, alkanes such as hexanes, heptanes, octanes, nonanes, decanes, undecanes and dodecanes and various mixtures of several of these solvents.

9. Process according to one of Claims 1 to 8, characterized in that it is applied to the isolation of a palladium-based catalyst from a mixture originating from the reaction of hydroxycarbonylation of butadiene to pentenoic acids.

10. Process according to one of Claims 1 to 9, characterized in that the two phases obtained after





density separation consist of an organic phase which contains more than half of the initial quantity of pentenoic acids, most of the butadiene and of the butenes and a proportion of the dicarboxylic acids which may be present in the solution to be treated, and of an aqueous phase which contains more than half of the quantity of palladium and a proportion of the dicarboxylic acids which may be present in the solution to be treated.

11. Process according to one of Claims 1 to 10, characterized in that the aqueous phase containing the palladium is recycled into a new butadiene hydroxycarbonylation reaction, preferably after a proportion of the hydrochloric acid which it contains has been distilled off, so as to adjust the quantity of hydrochloric acid to the quantity that it is convenient to have for the hydroxycarbonylation.

12. Process according to Claim 11, characterized in that the hydrochloric acid solution, corresponding to the water/hydrogen chloride azeotrope, thus obtained is employed for acidifying the initial solution to be treated, after addition of the top-up which may be necessary.

13. Process for isolation of at least a proportion of the palladium dissolved in a solution also containing at least 3-pentenoic acid, characterized in that the said process consists in distilling at least a proportion of the pentenoic acids



from the solution to be treated before it is acidified with the aid of an aqueous solution of hydrochloric acid.

14. Process according to Claim 13,
5 characterized in that the distillation is performed at a temperature which is lower than or equal to 110°C and more preferably at a temperature which is lower than or equal to 105°C in order to avoid the precipitation of palladium.

10 15. Process according to either of Claims 13 and 14, characterized in that the distillation is conducted at atmospheric pressure or at a pressure which is lower than atmospheric pressure, such as one situated between 2 kPa and 7 kPa.

15 16. Process according to one of Claims 13 to 15, characterized in that the residue obtained after distillation, containing the palladium, is treated with the aid of an aqueous solution of hydrochloric acid.

17. Process according to Claim 16,
20 characterized in that the aqueous solution of hydrochloric acid employed contains from 5 % to 40 % by weight of hydrochloric acid per weight of distillation residue.

18. Process according to either of Claims 16
25 and 17, characterized in that the acidified aqueous solution containing the palladium is recycled into a new butadiene hydroxycarbonylation reaction, if appropriate after distillation of the excess of hydrochloric acid.

This Sheet Has Been Replaced



09 FEB 1998

PROCESS FOR ISOLATION OF A CATALYST
CONTAINING PALLADIUM

The present invention relates to the isolation of a palladium-based catalyst from a mixture
5 in which it is dissolved.

More specifically, the invention relates to the isolation of a palladium-based catalyst from a mixture originating from the reaction of hydroxycarbonylation of butadiene to pentenoic acids.

10 One of the objectives of the process of the invention lies in the isolation of at least a proportion of the catalyst containing palladium which is dissolved in the form of organometallic complex in the mixture to be treated, in order to enable this
15 catalyst containing palladium to be recycled into a new butadiene hydroxycarbonylation reaction.

A second objective of the process is to make it possible to isolate at least a proportion of the pentenoic acids present in the said mixture.

20 The hydroxycarbonylation of butadiene and/or of its derivatives, such as especially the allylbutenols like 3-buten-2-ol, 2-buten-1-ol and their mixtures, the compounds of addition of hydrogen chloride to butadiene (chlorobutenes), the main one of
25 which is crotyl chloride, can be performed using water and carbon monoxide at a pressure that is higher than atmospheric pressure and in the presence of a catalyst containing palladium, soluble in the reaction mixture.

09 FEB 1998

Reference may be made, for example, to Patent EP-A-0 648 731 for a more detailed description of such a technique, although the present invention is not limited to the treatment of reaction mixtures
5 originating from the process according to this patent.

Patent US-A-3 857 895 describes a process for the hydroformylation of an olefin using carbon monoxide and hydrogen in the presence of a catalyst comprising a complex of a metal from Group VIII with a ligand
10 containing at least one aminoalkyl or amidinoalkyl or aminoaryl or amidinoaryl group bonded to a trivalent arsenic, antimony or phosphorus atom.

The mixture resulting from this reaction is treated in order to isolate the hydroformylation
15 product and the residue containing the catalyst, the said residue is treated with an acidic aqueous solution in order to dissolve the catalyst, and the acidic solution obtained is isolated.

In this process, the ligand reacts with the
20 acid to form ammonium salts which are soluble in the acidic solution.


The reaction mixtures used in the process of the invention contain more or less considerable quantities of the compounds involved in the
25 hydroxycarbonylation reaction and of the compounds formed during this reaction.

Apart from the palladium catalyst, which may be present in various chemical forms, the reaction

mixture contains the pentenoic acids formed, especially 3-pentenoic acid, water, hydrochloric acid, in most cases also reaction by-products like butenes or valeric acid, dicarboxylic acids like adipic acid,

5 2-methylglutaric acid and 2-ethylsuccinic acid, optionally butadiene which has not been converted and any optional solvent used in the reaction.

The invention consists therefore of a process for isolation of at least a proportion of the palladium
10 dissolved in a solution also containing at least 3-pentenoic acid, characterized in that the said solution is acidified and stirred with an aqueous solution of hydrochloric acid, so as to obtain two liquid phases, including an aqueous phase containing at
15 least a proportion of the palladium.

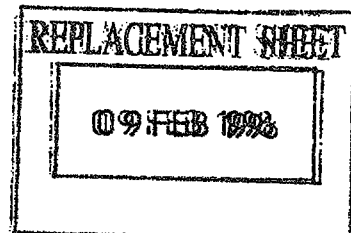

09 FEB 1998

CLAIMS

1. Process for isolation of at least a proportion of the palladium dissolved in a solution also containing at least 3-pentenoic acid,
5 characterized in that the said solution is acidified and stirred with an aqueous solution of hydrochloric acid, so as to obtain two liquid phases, including an aqueous phase containing at least a proportion of the palladium.
- 10 2. Process according to claim 1, characterized in that the aqueous solution of hydrochloric acid employed contains from 5 % to 40 % by weight of hydrochloric acid by weight of solution.
- 15 3. Process according to either of claims 1 and 2, characterized in that the aqueous solution of hydrochloric acid is added in a proportion of 0.2 to 2 times the volume of the solution to be treated.
- 20 4. Process according to one of claims 1 to 3, characterized in that the formation of two liquid phases during the acidification originates simply from the addition of the aqueous solution of hydrochloric acid.
- 25 5. Process according to claim 4, characterized in that the solution to be treated contains an essentially water-immiscible solvent such as an aromatic, aliphatic or cycloaliphatic hydrocarbon or a chlorinated aromatic, chlorinated aliphatic or chlorinated cycloaliphatic hydrocarbon.



6. Process according to one of claims 1 to 3, characterized in that the separation into two liquid phases is obtained by the addition of a water-immiscible organic solvent, an addition performed after 5 the acidification, at the time of the acidification or, if appropriate, before the acidification.

7. Process according to claim 6, characterized in that the organic solvent added in order to perform the extraction is chosen from 10 aromatic, aliphatic or cycloaliphatic hydrocarbons and chlorinated aromatic, chlorinated aliphatic or chlorinated cycloaliphatic hydrocarbons which are liquid in the operating conditions and are essentially water-immiscible.

15 8. Process according to either of claims 6 and 7, characterized in that the organic solvent is chosen from benzene, toluene, xylenes, chlorobenzenes, cyclohexane, butadiene, butenes, alkanes such as hexanes, heptanes, octanes, nonanes, decanes, undecanes 20 and dodecanes and various mixtures of several of these solvents.


9. Process according to one of claims 1 to 8, characterized in that it is applied to the isolation of a palladium-based catalyst from a mixture 25 originating from the reaction of hydroxycarbonylation of butadiene to pentenoic acids.

10. Process according to one of claims 1 to

REPLACEMENT SHEET

09 FEB 1998

characterized in that the two phases obtained after

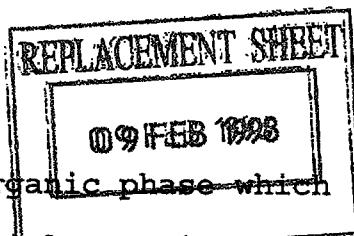

density separation consist of an organic phase which contains more than half of the initial quantity of

pentenoic acids, most of the butadiene and of the butenes and a proportion of the dicarboxylic acids

5 which may be present in the solution to be treated, and of an aqueous phase which contains more than half of the quantity of palladium and a proportion of the dicarboxylic acids which may be present in the solution to be treated.

10 11. Process according to one of claims 1 to 10, characterized in that the aqueous phase containing the palladium is recycled into a new butadiene hydroxycarbonylation reaction, preferably after a proportion of the hydrochloric acid which it contains
15 has been distilled off, so as to adjust the quantity of hydrochloric acid to the quantity that it is convenient to have for the hydroxycarbonylation.


12. Process according to claim 11, characterized in that the hydrochloric acid solution,
20 corresponding to the water/hydrogen chloride azeotrope, thus obtained is employed for acidifying the initial solution to be treated, after addition of the top-up which may be necessary.

13. Process according to one of claims 1 to
25 12 for isolation of at least a proportion of the palladium dissolved in a solution also containing at least 3-pentenoic acid, characterized in that the said process consists in distilling at least a proportion of



the pentenoic acids from the solution to be treated before it is acidified with the aid of an aqueous solution of hydrochloric acid.

14. Process according to claim 13,
5 characterized in that the distillation is performed at a temperature which is lower than or equal to 110°C and more preferably at a temperature which is lower than or equal to 105°C in order to avoid the precipitation of palladium.
- 10 15. Process according to either of claims 13 and 14, characterized in that the distillation is conducted at atmospheric pressure or at a pressure which is lower than atmospheric pressure, such as one situated between 2 kPa and 7 kPa.
- 15 16. Process according to one of claims 13 to 15, characterized in that the residue obtained after distillation, containing the palladium, is treated with the aid of an aqueous solution of hydrochloric acid.
- 20 17. Process according to claim 16, characterized in that the aqueous solution of hydrochloric acid employed contains from 5 % to 40 % by weight of hydrochloric acid per weight of distillation residue.
- 25 18. Process according to either of claims 16 and 17, characterized in that the acidified aqueous solution containing the palladium is recycled into a new butadiene hydroxycarbonylation reaction, if appropriate after distillation of the excess of hydrochloric acid.



PCT WORLD ORGANISATION FOR INTELLECTUAL PROPERTY
International Office
INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International patent classification⁶ : B01J 31/40, 38/60, C07C 51/42, 57/03	A1	(11) International publication number: WO 97/05949 (43) International publication date: 20 February 1997 (20.02.97)
(21) International application number: PCT/FR96/01130 (22) International filing date: 18 July 1996 (18.07.96) (30) Data relating to the priority: 95/09,807 9 August 1995 (09.08.95) FR (71) Applicant (for all designated States except US): RHONE-POULENC FIBER AND RESIN INTERMEDIATES [FR/FR]: 23, quai Paul Doumer, F-92408 Courbevoie Cédex (FR). (72) Inventors; and (75) Inventors/Applicants (US only): Philippe LECONTE [FR/FR]: 43, rue Sainte-Beuve, F-69330 MEYZIEU (FR). Carly PATOIS [FR/FR]: 2, avenue Jules- Jusserand, F-69008 Lyon (FR). (74) Representative: Noël VIGNALLY; Rhône-Poulenc Chimie, Industrial Property Directorate, C.R.I.T. - Carrières, P.O. Box 62, F-69192 Saint-Fons Cédex (FR).	(81) Designated States: BR, BY, CA, CN, CZ, JP, KR, MX, PL, RU, (SG) SK, UA, US, VN, European Patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With the International Search Report.	

As printed

(54) Title: METHOD FOR SEPARATING A PALLADIUM CATALYST

(54) Titre: PROCEDE DE SEPARATION D'UN CATALYSEUR AU PALLADIUM

(57) Abstract

A method for separating a palladium catalyst from the medium in which it dissolved is disclosed. Specifically, the method is useful for separating a palladium catalyst from a medium resulting from a butadiene hydroxycarbonylation reaction producing pentenoic acids. The method therefore comprises at least partially separating the palladium dissolved in a solution that also contains 3-pentenoic acid, and is characterised in that said solution is acidified and stirred with an aqueous hydrochloric acid solution and in that two liquid phases are produced, including an aqueous phase containing all or part of the palladium.

(57) Abrégé

La présente invention concerne la séparation d'un catalyseur à base de palladium, à partir d'un milieu dans lequel il est dissous. Plus spécifiquement, l'invention concerne la séparation d'un catalyseur à base de palladium, à partir d'un milieu provenant de la réaction d'hydroxycarbonylation du butadiène en acides penténoïques. Elle consiste donc en un procédé de séparation d'au moins une partie du palladium dissous dans une solution contenant aussi au moins de l'acide 3-penténoïque, caractérisé en ce que ladite solution est acidifiée et agitée avec une solution aqueuse d'acide chlorhydrique et en ce que l'on obtient deux phases liquides dont une phase aqueuse contenant au moins une partie du palladium.