

- 1 -

CATHODIC PROTECTION OF REINFORCED CONCRETE

This invention relates to the cathodic protection of reinforced concrete.

The application of cathodic protection to steel reinforcement in concrete is an accepted method of providing corrosion protection for the metal, particularly where chloride ions are present at significant concentrations in the concrete.

Cathodic protection involves the formation of a circuit with the reinforcement acting as a cathode, electrically connected to an anode, with the circuit being completed by pore solution in the concrete and an electrolyte contacting the anode. When a potential difference exists corrosion of the cathode is prevented or reduced.

It is known to create a potential difference between anode and cathode both by means of impressed current cathodic protection which involves the use of a non-sacrificial anode and an applied electric current using an external DC power supply and by means of a galvanic cell in which the potential arises as a result of the different materials forming a sacrificial anode and a cathode.

Where a galvanic cell is used it is important that the electrolyte contacting the anode is such that sustained active corrosion of the anode can occur. If suitable conditions are not maintained then the cathodic protection will become inefficient.

Furthermore, the electrolyte must be such that its contact with the surrounding concrete does not result in the degradation of the concrete. Of particular significance in this context is the susceptibility of some aggregates, present in concrete, to alkali-silica or alkali-aggregate reactions. These reactions can cause swelling and consequential cracking of concrete.

According to the invention there is provided a method of cathodically protecting reinforcement in concrete in which a sacrificial anode is galvanically connected to the reinforcement characterised in that the anode is contacted with an electrolyte solution having a pH which is maintained sufficiently high for corrosion of the anode to occur and for passive film formation on the anode to be avoided.

According to a further feature of the invention there is provided a unit for use in the cathodic protection of reinforcement in concrete by the method of Claim 1 characterised in that the unit comprises a sacrificial anode in contact with a material containing an electrolyte which in solution has a pH which is sufficiently high for corrosion of the anode to occur and for passive film formation on the anode to be avoided when the anode is galvanically connected to the reinforcement.

According to yet a further feature of the invention there is provided an article of reinforced concrete characterised in that the reinforcement is cathodically protected by the method described above.

To avoid passivation of the anode a suitable pH must be maintained around the anode. Although for zinc a suitable pH value is > 13.3 , or possible > 13.5 , and preferably > 14 , other materials when used as the anode may require other electrolyte pH limits to avoid passivity. In practice while any pH above the "boundary value" at which passivity is likely may be suitable in the short term, it is advantageous to have a pH well above the "boundary value" to start with. During cathodic protection the pH near the anode is likely to drop and so a higher initial pH acts as a reserve to maintain activity over a long period. pH values of 0.2 above the "boundary pH" may be acceptable, but pH values, 0.5, 0.7 and 1.0 or more units above the "boundary pH" are likely to give a better reserve and a better long term performance.

The anode material selected will determine the electrolyte pH required to maintain active corrosion. In general terms the material

chosen must be more reactive, and preferably significantly more reactive, than the material forming the reinforcement.

The anode is preferably zinc or a zinc alloy but the anode may be aluminium, an aluminium alloy, cadmium, a cadmium alloy, magnesium or a magnesium alloy or another material which has a more negative standard electrode potential than the reinforcement under the prevalent conditions.

The electrolyte may be for example sodium hydroxide or potassium hydroxide.

Advantageously, in some circumstances, at least one alkali-silica reaction inhibitor is also present, in at least a portion of the electrolyte.

The high pH of the electrolyte may be due, at least in part, to one or more of the alkali-silica reaction inhibitors.

Preferably at least one of the alkali-silica reaction inhibitors is provided in an hydroxide form. Most preferably the, or one of the inhibitors is lithium hydroxide, which can also function as the electrolyte itself.

The electrolyte solution may be the pore solution of the concrete and/or the pore solution of a mortar, paste or other porous material applied to the concrete being protected.

The method may be practised during the course of repairing reinforced concrete by connecting one or more sacrificial anodes to the reinforcement and applying repair material and the electrolyte to the repair site.

Preferably the anodes are provided in the vicinity of the repair site. If the anode is provided away from the repair site there is

likely to be a loss of efficiency due to the extra circuit length required to complete the galvanic cell. Most preferably the anodes are provided near the periphery of the repair site. The anodes are preferably in the new material of the repair site. There may be many anodes. The anode or anodes may have a relatively large surface area and for example could be a mesh or wire (or wires) extending adjacent to the periphery of the repair site.

Preferably each anode is substantially enclosed in repair material containing an electrolyte of high pH. The portion of repair material away from the anode may have a different pH compared with the portion of repair material substantially enclosing the anode. The repair material away from the anode may have a pH that is relatively moderate or low compared with that near the anode.

The whole or any portion of the repair material may also contain one or more alkali-silica reaction inhibitors.

Where only a portion of the material contains an electrolyte of high pH and only a portion contains one or more alkali-silica reaction inhibitors the portions may be the same, distinct or overlapping in extent.

Preferably at least one of the alkali-silica reaction inhibitors also contributes to the high pH of the electrolyte.

As well as introducing sacrificial anodes and an electrolyte of high pH to a structure during a repair, potentially along with an alkali-silica reaction inhibitor, this invention is also applicable to the construction of new reinforced concrete articles or structures and to the improved protection of existing ones.

Just as during repair, anodes and a suitable electrolyte can be provided in electrical contact with the reinforcement to form a

galvanic cell, so a similar arrangement can be generated during construction.

The entire structure can be provided with a suitable electrolyte, or merely that portion in the vicinity of the anode can be so provided.

In the construction of new reinforced concrete articles or structures one or more sacrificial anodes can be connected to the reinforcement, a material containing the electrolyte cast around the anode or anodes and concrete then cast around the electrolyte-containing material.

In the improvement of the protection of existing concrete articles one or more sacrificial anodes can be inserted in a hole in a mass of reinforced hardened concrete and connected to the reinforcement and then surrounded by a material containing the electrolyte.

In both methods the material containing the electrolyte can be a non-cementitious material or a cementitious material.

One or more of the sacrificial anodes may be introduced to the repair site as a pre-formed unit comprising an anode in contact in use with a porous material containing an electrolyte of high pH. The material may also contain one or more alkali-silica reaction inhibitors. The unit may have an anode substantially enclosed in porous material of high pH.

The sacrificial anode may be at least partially enclosed in the material. Only a portion of the material which contacts the anode may contain an electrolyte of high pH. Of course more than one anode could be provided in each unit.

The unit may comprise a container holding the material and the anode. The unit may be ready for introduction to a repair site, or may require some local treatment (for example wetting). The unit may comprise a bag or sock which contains the high pH material and an anode.

It is possible to provide a localised area of high pH adjacent or around the anode and this will probably occur in patch repair automatically. However it may be desirable to have a region of higher pH even when making original concrete articles.

Embodiments of the invention will now be described by way of example only, with reference to the accompanying drawings, in which:-

Figure 1 shows a repair site in a reinforced concrete article, with the reinforcement exposed and sacrificial anodes attached; and

Figure 2 shows a cross section through a reinforced concrete article with a sacrificial anode unit embedded therein.

Chloride-contamination of concrete structures can cause significant corrosion in reinforced structures. Such corrosion is often localised and can cause cracking of concrete surrounding the reinforcement. It is normal to treat problems of local corrosion-induced cracking in reinforced concrete structures primarily by removing the affected material and patching with fresh cementitious mortars or concretes. A common difficulty which arises in such cases is that failure to detect and remove all chloride-contaminated concrete from around the corrosion-damaged areas can result in the formation of so-called "incipient anodes" on the reinforcing steel in the vicinity of the repair patches, which are electrically coupled to cathodic steel situated in the repaired areas themselves. This can lead to rapid corrosion at the "incipient anodes" and to eventual cracking of the concrete around the repaired areas.

However, if having removed the contaminated and cracked concrete from around the reinforcement in regions of the structure where corrosion has been detected or where chloride salts have been found in significant concentrations, the exposed steel is cleaned and connected to zinc-based sacrificial anodes at locations near the periphery of the area to be patched and the repair site is reinstated with mortar (or a similar material) of suitably controlled high pore solution pH, (for example $\text{pH} > 13.3$, 13.5 or 14 for zinc or zinc alloy anodes) such problems can be overcome.

Figure 1 illustrates such a repair where a contaminated volume of concrete has been removed from a concrete slab 1 to leave a void. As a result the reinforcement 2 is exposed. The reinforcement 2 can then be cleaned and a series of zinc anodes 3 can be attached by connectors 4 to the reinforcement at locations 5. The anodes may conveniently be located around the periphery of the area to be protected.

Subsequently repair mortar can be applied to fill the void.

The pore solution of the repair mortar acts as the electrolyte to complete the circuit enabling cathodic protection to take place, with the high pH ensuring that corrosion of the anode and hence the protection is sustainable.

In many cases a pore solution having pH values high enough for use in the above applications may be made either from Portland cements of intrinsically high alkali content (i.e. those containing relatively high proportions of Na_2O and K_2O or from cements of lower alkali content with supplementary alkalis (in the form of LiOH , NaOH or KOH for instance) incorporated into the mix materials as admixtures.

In some instances, because the presence of high concentrations of hydroxyl ions in combination with sodium and potassium ions can cause alkali-silica reactions, which can cause deleterious expansion and cracking of the concrete, the presence of an alkali-silica reaction inhibitor is advisable.

Where a potentially reactive aggregate is present the mortar can be made from a cement of relatively low alkali content with lithium hydroxide as an admixture. Typically, this would involve the addition of LiOH to the mix water at a concentration of about 1 mole/litre or higher, which would ensure the maintenance of a high pH value, necessary to sustain the activity of the zinc-based anode, whilst introducing a cation, Li^+ , that is known to act as an inhibitor of alkali-silica reaction.

The use of lithium hydroxide as admixture is of especial benefit when the mortar, concrete, or the like, has a low Na and K content (or a low Na or K content). Li^+ can assist in preventing alkali aggregate reaction.

Alternatively other inhibitors may be added to the material in use, for example to the mix water, in conjunction with a pH adjusting reagent.

The inhibition effect of such reagents is aided further in that the current resulting from the cathodic protection encourages migration of the inhibitor to the preferential alkali-silica reaction sites, (where the inhibitor has a positive charge, as is the case for lithium ions). Thus lithium ions migrate over time and there is in use a higher concentration of them where they are desirable.

As an alternative to (or in addition to) using repair mortars (or similar) of high pH value to reinstate the entire region of removed concrete, it is also possible to utilise sacrificial zinc-based anodes which have been precast in mortars of suitable composition. Such an

arrangement is shown in Figure 2, where a sacrificial anode 6 is almost entirely enclosed in a block of precast mortar 7 to form a discrete unit. A connector 8 allows connection of the anode to the reinforcement 9 in use. The mortar 7 contains an electrolyte of a sufficient pH to ensure that the anode remains active, in use.

Having galvanically coupled the anode to the steel reinforcement reinstatement of the regions to be patched may then be carried out with mortar or concrete 10 of moderate or low alkali content because the sacrificial anode 6 has already been surrounded by mortar 7 containing an electrolyte that will sustain its activity, allowing effective cathodic protection of the steel. Surrounding the anode with high pH mortar is preferred, but it may not be essential to surround it fully.

As well as precast units the provision of porous bags or socks containing an anode and the mixtures for the mortar is envisaged. The high pH electrolyte, with or without alkali-silica reaction inhibitors, may then be added at the location of the structure in question. Other porous material to enclose the anode, for example foams, plastics, sponges are also envisaged.

As a further alternative it is possible to apply the anode as a coating or layer (for example as a paint to the reinforcement). It is usually desirable to clean the reinforcement first in such applications. The paint would be rich in the dissimilar metal or composition which forms the anode, so providing cathodic protection in that way. Zinc or zinc alloys are particularly suitable for such applications.

To ensure the continued activity of the anode the electrolyte surrounding the reinforcement applied paint needs to be at a high pH. A suitable pH for zinc is > 14 although pH values > 13.3 are believed to work for at least a limited period. However, the remainder of the repair material could once again be of lower or more moderate pH (or could be of the same pH).

If the concrete was judged to be susceptible to alkali-silica reactions then lithium ions or other inhibitors could be provided either in the surrounding electrolyte (or in the paint or coating forming the anode). If the concrete were judged not to be susceptible to alkali-silica reactions then it may be preferable to use NaOH or KOH (or some other alkali) to produce the high pH rather than lithium hydroxide.

When treating an existing structure without the need for repair, sacrificial anodes can be provided in proximity with a surface of the structure. Mortar, paste or other porous material containing a suitably high pH electrolyte can be introduced to connect the anode to the pore solution of the existing concrete; with the anode connected to the reinforcement to complete the circuit. Alkali-silica reaction inhibitors can also be introduced to the electrolyte and so can migrate into the existing structure because of the galvanic potential.

Instead of providing the anodes in their own pre-cast high pH environment (with or without the presence of alkali-silica reaction inhibitors) it is possible to apply a region of high pH (and/or alkali-silica reaction inhibitors) mortar in the vicinity of the or each anode, and a region of different pH elsewhere (for example as an upper layer on top of a lower layer). The anode would still be in contact with a high pH electrolyte.

The ready made anode unit shown in Figure 2 comprises a pre-cast concrete block. However other units may be provided, such as for example bags or socks of high pH concrete or mortar which also contain an anode which is in use connected to the reinforcement. The bags may be provided with wet, unset, mortar, or may be provided dry, the user wetting them before use. They may even in some unlikely circumstances be used dry, absorbing the necessary liquid from their surroundings (when they are cast into place). The units would normally also contain a connector to connect the anode to the reinforcement.

The anodes may be provided separately from the bags of high pH material and introduced to the high pH material upon installation.

It will also be appreciated that the high pH material in contact with the (and preferably surrounding) the anode need not be mortar or concrete, so long as it is permeable to the electrolyte. It preferably has good mechanical strength in use, but not necessarily. In an extreme case it could be spongy.

It will be appreciated that the pH of the concrete, mortar or the like is controlled. This is done either by choosing the composition of the repair material so as to give a suitably high pH, or by deliberately adding admixtures (such as KOH and/or LiOH, and/or NaOH) to give the desired pH. Thus controlling the pH is a step in the method.

The following example will serve to further illustrate the invention.

Mild steel bars 6 mm in diameter were cut into 80 mm lengths, cleaned using 600 grade carbide paper, degreased in acetone and stored in a desiccator for a minimum of 2 days so that a uniform oxide film could develop on the surface. The two ends of the steel specimens were masked using a styrene-butadiene rubber modified cement slurry and epoxy resin in such a way as to expose a 10 cm² area of the central region of each specimen. The top 3 mm of each specimen was left unmasked to provide an electrical connection during monitoring. These mild steel specimens were individually fixed in a hole on the lids of cylindrical PVC containers (45 mm dia., 75 mm high). Similarly, strips of zinc 1 mm thick 10 mm wide and 80 mm long were prepared in the same way allowing a central region of 10 cm² to be exposed. These strips were also fixed individually on lids.

Duplicate cement pastes of a 0.5 water/cement ratio and containing 3% chloride by weight of cement as sodium chloride were then produced. The freshly made mix was emptied into the PVC

containers in two stages, vibrating after each stage. The lids containing the steel electrodes were then fixed on to the containers and after further vibration of a few seconds for compaction, the cast specimens were allowed to stand for 24 hours in ambient conditions. After demoulding, the specimens were stored in a 100% relative humidity environment at room temperature. The cement was an ordinary Portland cement of about 0.6% alkali content expressed as Na_2O equivalent. This level of alkali produced a cement paste whose pore-solution had a pH of about 13.6. In the same way the zinc electrodes were embedded in cement pastes containing 0 or 2 molar NaOH or LiOH dissolved in the mix water. Such additions of alkali hydroxides raised the pH of the pore-solution to a level higher than 14.

The corrosion potential of each individual steel or zinc electrode was measured regularly with a voltmeter against a standard saturated calomel electrode rested on a damp piece of tissue paper positioned on each of the cement paste specimens. After three weeks, one of the steel electrodes and one zinc specimen containing 2 molar NaOH were positioned side by side at a distance of around 5 cm in a container able to maintain a near 100% relative humidity and whose base was lined with wet tissue paper. The two electrodes were electrically connected so that a current could pass between them.

The potential of the corroding steel embedded in chloride contaminated cement paste quickly fell to a value lower than -400 mV and oscillated around this value throughout the exposure period of over 300 days. The potential of the zinc electrode embedded in cement paste without any additions after starting at a very negative potential of around -750 mV gradually climbed to more noble potentials of around -400 mV. The similarity of the potential of the two sets of electrodes will restrict the flow of current between them when coupled and protection of the steel against corrosion would be unlikely. Such protection will only be achieved if a significant potential gradient existed between the two metals. The addition of 2 molar sodium hydroxide or lithium hydroxide was able to bring the potential of the zinc to potentials of

around -700 mV, values significantly lower than those obtained for the corroding steel. The coupling of the steel electrode with the zinc embedded in a paste whose alkalinity was enhanced by addition of NaOH resulted in a galvanic current which eventually stabilised at around 2.5 μ A (0.25 μ A/cm² or 2.5 mA/m² of steel area) a level of current normally applied in cathodic protection systems in steel reinforced concrete. The "instant off" potentials of the steel and the zinc electrodes after 275 days were -426 mV and -640 mV respectively. The potential of the steel after 24 hours of disconnection rose to a very noble value of -207 mV compared to -470 mV of the parallel unprotected steel specimen, indicating a substantial degree of protection of the steel by the zinc anode.

THIS SHEET HAS BEEN
REPLACED

- 14 -



CLAIMS

1. A method of cathodically protecting reinforcement in concrete in which a sacrificial anode is galvanically connected to the reinforcement characterised in that the anode is contacted with an electrolyte solution having a pH which is maintained sufficiently high for corrosion of the anode to occur and for passive film formation on the anode to be avoided.
2. A method according to Claim 1 characterised in that the pH of the electrolyte solution is at least 0.2 units above the pH value at which passivity of the anode would occur.
3. A method according to Claim 1 characterised in that the pH of the electrolyte solution is from 0.5 units to more than 1.0 units above the pH value at which passivity of the anode would occur.
4. A method according to any one of Claims 1 to 3 characterised in that the anode is zinc or a zinc alloy.
5. A method according to Claim 4 characterised in that the pH of the electrolyte solution is greater than 13.3.
6. A method according to Claim 4 characterised in that the pH of the electrolyte solution is greater than 14.0.
7. A method according to any one of Claims 1 to 3 characterised in that the anode is aluminium, an aluminium alloy, cadmium, a cadmium alloy, magnesium or a magnesium alloy.
8. A method according to any one of Claims 1 to 7 characterised in that the electrolyte is sodium hydroxide or potassium hydroxide.

This Sheet Has Been Replaced





- 15 -

9. A method according to any one of Claims 1 to 8 characterised in that the anode is also in contact with an alkali-silica reaction inhibitor.
10. A method according to Claim 9 characterised in that the electrolyte and the alkali-silica reaction inhibitor are lithium hydroxide.
11. A method according to any one of Claims 1 to 10 characterised in that one or more sacrificial anodes is or are connected to the reinforcement, a material containing the electrolyte solution is cast around the anode or anodes and concrete is cast around the electrolyte-containing material.
12. A method according to any one of Claims 1 to 10 characterised in that the one or more sacrificial anodes is or are inserted in a hole in a mass of reinforced hardened concrete and connected to the reinforcement, and then surrounded by a material containing the electrolyte.
13. A method according to Claim 11 or Claim 12 characterised in that the material containing the electrolyte is a non-cementitious material.
14. A method according to Claim 11 or Claim 12 characterised in that the material containing the electrolyte is a cementitious material.
15. A method according to any one of Claims 1 to 10 characterised in that the method is carried out during repair of the reinforced concrete, and the electrolyte and repair material are applied to a repair site at which one or more sacrificial anodes is or are connected to the reinforcement.

This Sheet Has Been Replaced





- 16 -

16. A method according to Claim 14 or Claim 15 characterised in that the anode contacting portion has a different pH compared with remaining repair material.

17. A unit for use in the cathodic protection of reinforcement in concrete by the method of Claim 1 characterised in that the unit comprises a sacrificial anode in contact with a material containing an electrolyte which in solution has a pH which is sufficiently high for corrosion of the anode to occur and for passive film formation on the anode to be avoided when the anode is galvanically connected to the reinforcement.

18. A unit according to Claim 17 characterised in that the sacrificial anode is at least partially enclosed in the material.

19. A unit according to Claim 17 or Claim 18 characterised in that only a portion of the material which contacts the anode contains the electrolyte.

20. A unit according to any one of Claims 17 to 19 characterised in that the anode is zinc or a zinc alloy.

21. A unit according to any one of Claims 17 to 19 characterised in that the anode is aluminium, an aluminium alloy, cadmium, a cadmium alloy, magnesium or a magnesium alloy.

22. A unit according to any one of Claims 17 to 21 characterised in that the electrolyte is sodium hydroxide or potassium hydroxide.

23. A unit according to any one of Claims 17 to 21 characterised in that at least a portion of the material contains one or more alkali-silica reaction inhibitors.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

- 17 -



24. A unit according to Claim 23 characterised in that the electrolyte and the alkali-silica reaction inhibitor are lithium hydroxide.

25. A unit according to any one of Claims 17 to 24 characterised in that the anode is enclosed in a block of precast concrete or mortar containing the electrolyte and the anode has a connector for connecting to the reinforcement in use.

26. A unit according to any one of Claims 1 to 24 characterised in that the anode and the material containing the electrolyte are contained in a bag or sock.

27. A unit according to any one of Claims 17 to 26 characterised in that the unit contains more than one anode.

28. An article of reinforced concrete characterised in that the reinforcement is cathodically protected by a method according to any one of Claims 1 to 16.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

CATHODIC PROTECTION OF REINFORCED CONCRETE

ABSTRACT

Reinforcement in concrete is cathodically protected by galvanically connecting a sacrificial anode, such as a zinc or zinc alloy anode, to the reinforcement, and contacting the anode with an electrolyte solution having a pH which is maintained sufficiently high for corrosion of the anode to occur, and for passive film formation on the anode to be avoided. The pH of the electrolyte is preferably at least 0.2 units, more preferably from 0.5 units to more than 1.0 units above the pH value at which passivity of the anode would occur. The electrolyte may be for example sodium hydroxide or potassium hydroxide but is preferably lithium hydroxide which also acts as an alkali-silica reaction inhibitor.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

FIG.1.



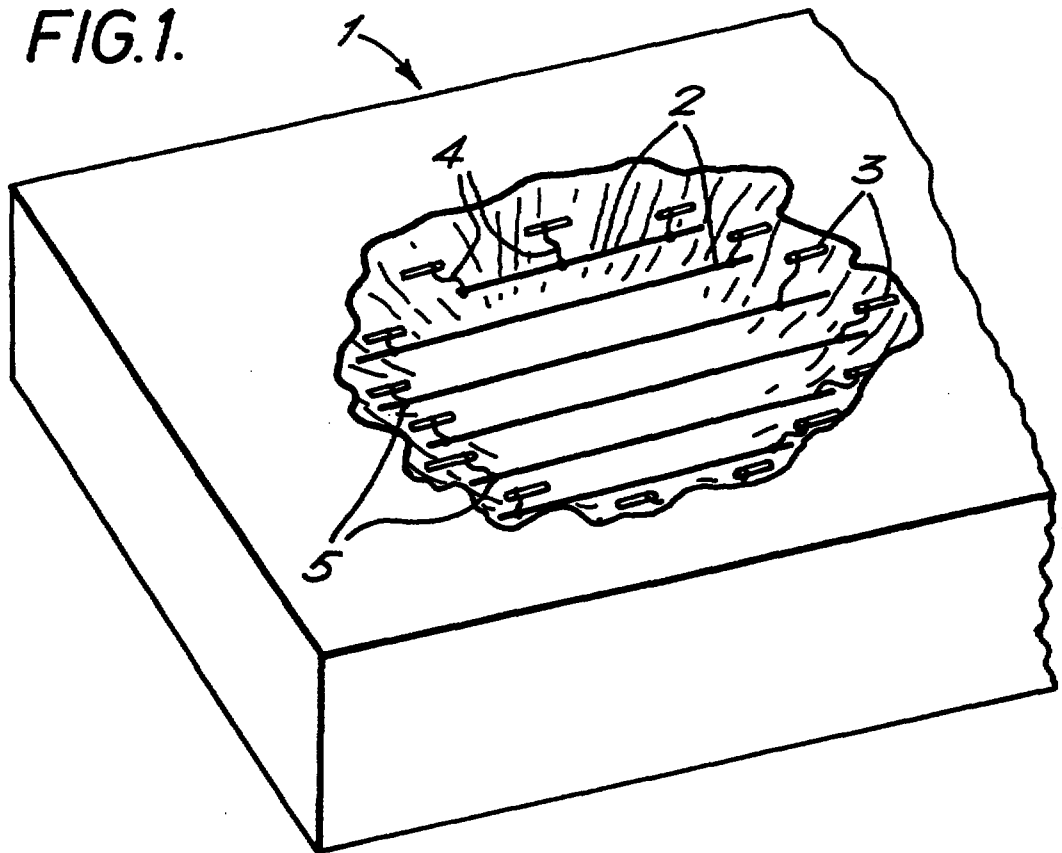


FIG.2.



This Sheet Has Been Replaced

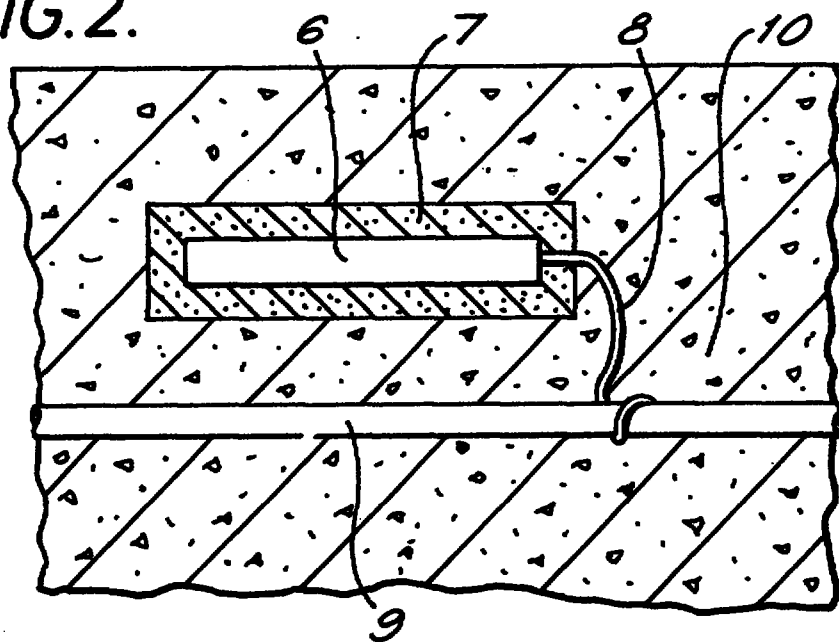

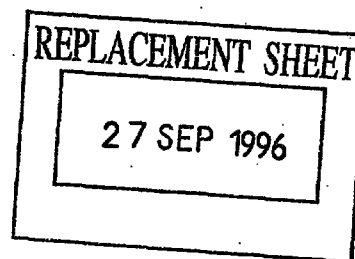

CATHODIC PROTECTION OF REINFORCED CONCRETE

ABSTRACT

Reinforcement in concrete is cathodically protected by galvanically connecting a sacrificial anode, such as a zinc or zinc alloy anode, to the reinforcement, and contacting the anode with an electrolyte solution having a pH which is maintained sufficiently high for corrosion of the anode to occur, and for passive film formation on the anode to be avoided. The pH of the electrolyte is preferably at least 0.2 units, more preferably from 0.5 units to more than 1.0 units above the pH value at which passivity of the anode would occur. The electrolyte may be for example sodium hydroxide or potassium hydroxide but is preferably lithium hydroxide which also acts as an alkali-silica reaction inhibitor.

Fig. 1.

FIG.1.




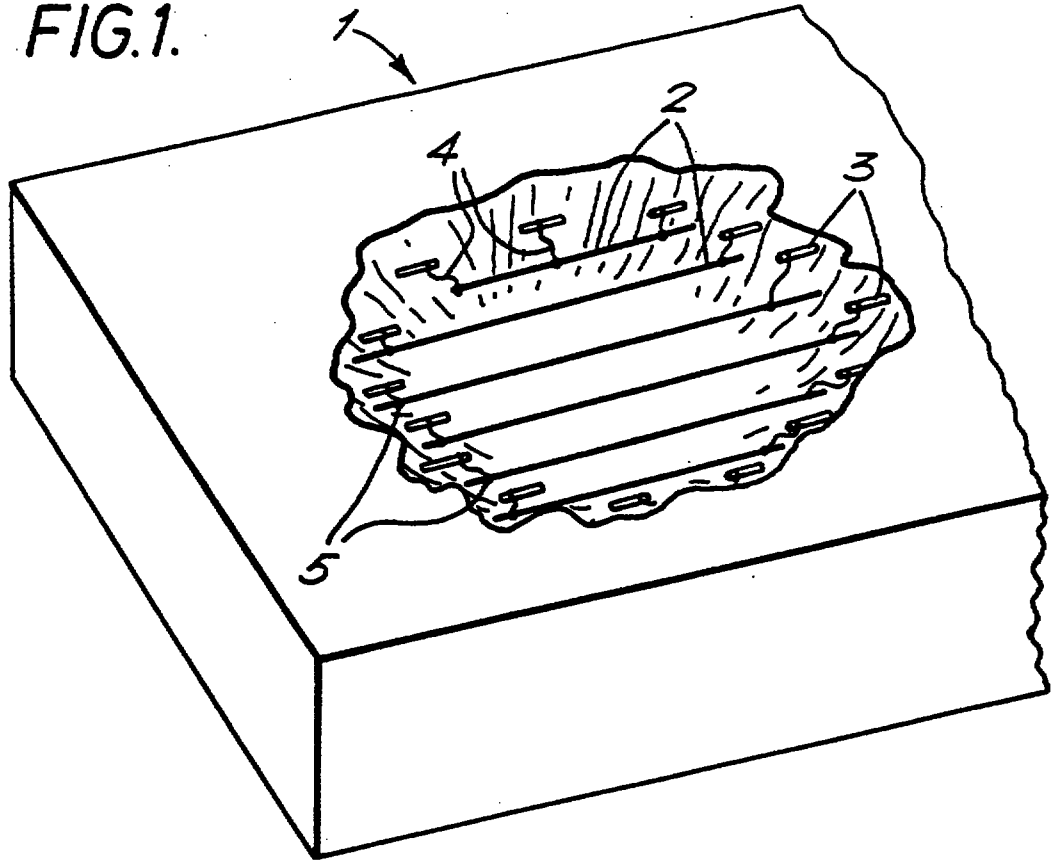


FIG.2.

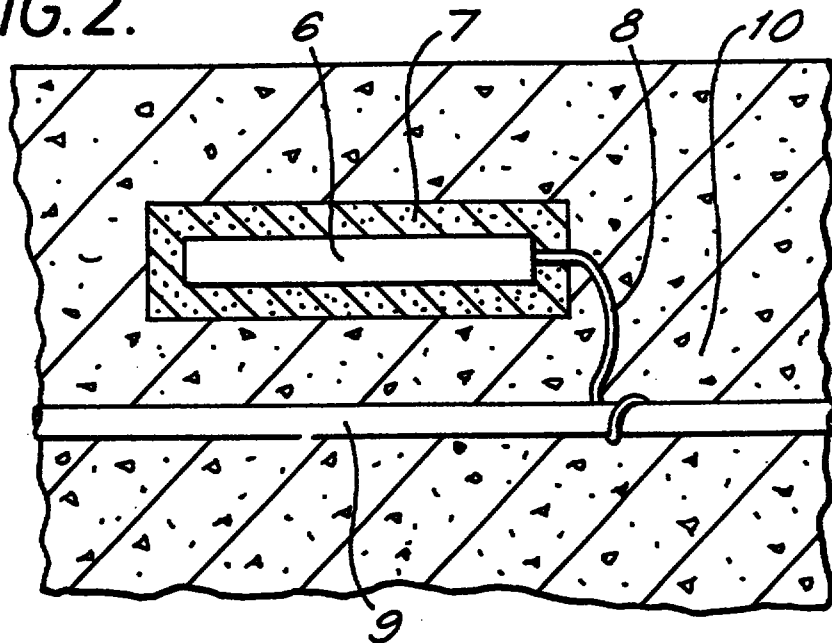

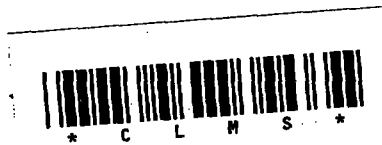

14



CLAIMS


1. A method of cathodically protecting metal reinforcement in concrete, the method comprising galvanically connecting a sacrificial anode to the metal reinforcement in the presence of an alkaline solution characterised by embedding the anode in the concrete and by substantially enclosing the anode in an electrolyte solution having a pH which is maintained sufficiently high for corrosion of the anode to occur and for passive film formation on the anode to be avoided.
2. A method according to Claim 1 characterised in that the pH of the electrolyte solution is at least 0.2 units above the pH value at which passivity of the anode would occur.
3. A method according to Claim 2 characterised in that the pH of the electrolyte solution is from 0.5 units above the pH value at which passivity of the anode would occur.
4. A method according to any one of Claims 1 to 3 characterised in that the anode is zinc or a zinc alloy.
5. A method according to Claim 4 characterised in that the pH of the electrolyte solution is greater than 13.3.
6. A method according to Claim 5 characterised in that the pH of the electrolyte solution is greater than 14.0.

07 JUL 1997

15



7. A method according to any one of Claims 1 to 3 characterised in that the anode is aluminium, an aluminium alloy, cadmium, a cadmium alloy, magnesium or a magnesium alloy.
8. A method according to any one of Claims 1 to 7 characterised in that the anode is also in contact with an alkali-silica reaction inhibitor.
9. A method according to any preceding Claim, characterised by the step of applying the sacrificial anode as a coating or layer on the metal reinforcement to be protected cathodically.
10. A method according to any one of Claims 1 to 8 characterised in that one or more sacrificial anodes is or are connected to the reinforcement, a material containing the electrolyte solution is cast around the anode or anodes and concrete is cast around the electrolyte-containing material whereby the anode(s) is/or are embedded in the concrete and is/or substantially surrounded by the electrolyte solution.
11. A method according to Claim 10 characterised in that the one or more sacrificial anodes is or are inserted in a hole in a mass of reinforced hardened concrete and connected to the reinforcement, and then surrounded by a material containing the electrolyte.
12. A method according to Claim 10 or 11 characterised in that the material containing the electrolyte is a cementitious material or a non-cementitious material.
13. A method according to any one of Claims 1 to 12 characterised in that the method is carried out during repair of reinforced concrete.

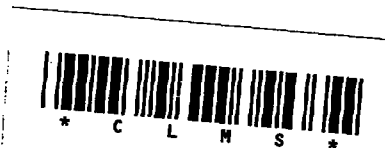


16

REPLACEMENT SHEET

07 JUL 1997

14. A method according to Claim 12 characterised in that repair material in contact with the anode has a different pH compared with the other repair material.
15. A method of repairing corrosion-induced cracked concrete containing metal reinforcement, the method comprising removing the affected concrete to expose the metal reinforcement, cleaning the metal and then adding fresh cementitious mortar or concrete repair material characterised by connecting a sacrificial anode to the cleaned metal reinforcement and then substantially enclosing the anode with a repair material containing an electrolyte which in solution has a pH which is sufficiently high for corrosion of the anode to occur and for passive film formation of the anode to be avoided.
16. A method according to Claim 15, characterised in that the sacrificial anode is zinc based and the repair material has a pore solution pH in excess of 13.3.
17. A unit for use in the cathodic protection of reinforcement in concrete by the method of Claim 1 or 15 characterised in that the unit comprises a sacrificial anode to be embedded in the concrete and a material containing an electrolyte which in solution has a pH which is sufficiently high for corrosion of the anode to occur and for passive film formation on the anode to be avoided when the anode is galvanically connected to the reinforcement.
18. A unit according to Claim 17 characterised in that the sacrificial anode is at least partially enclosed in the material.



19. A unit according to Claim 17 or 18 characterised in that only a portion of the material which contacts the anode contains the electrolyte.
20. A unit according to any one of Claims 17 to 19 characterised in that the anode is zinc or a zinc alloy.
21. A unit according to any one of Claims 17 to 19 characterised in that the anode is aluminium, an aluminium alloy, cadmium, a cadmium alloy, magnesium or a magnesium alloy.
22. A unit according to any one of Claims 17 to 21, characterised in that the material containing the electrolyte is cementitious or non-cementitious.
23. A unit according to any one of Claims 17 to 22 characterised in that the unit is subjected to wetting before being introduced to the repair site.
24. A unit according to any one of Claims 17 to 23 characterised in that the anode and the material containing the electrolyte are contained in a bag or sock.
25. A unit according to any one of Claims 17 to 23 characterised in that the anode is enclosed in a block of precast concrete or mortar containing the electrolyte and the anode has a connector for connection to the reinforcement.