



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:

A43C 1/00, 1/04, 3/02

A1

(11) International Publication Number:

WO 95/22917

(43) International Publication Date:

31 August 1995 (31.08.95)

(21) International Application Number:

PCT/US95/02336

(22) International Filing Date:

28 February 1995 (28.02.95)

(30) Priority Data:

08/202,896

28 February 1994 (28.02.94)

US

(71)(72) Applicant and Inventor: ORECK, Adam, H. [US/US];
Suite 2505, 20 N.E. Second Street, Minneapolis, MN 55413
(US).

(74) Agent: RAASCH, Kevin, W.; Schwegman, Lundberg &
Woessner, 3500 IDS Center, 80 South Eighth Street, Min-
neapolis, MN 55402 (US).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH,
CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG,
KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW,
MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,
TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE,
DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI
patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE,
SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).


Published

With international search report.

Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.

9611248-7
IPOS^r
copy

(54) Title: SHOE HAVING LACE TUBES

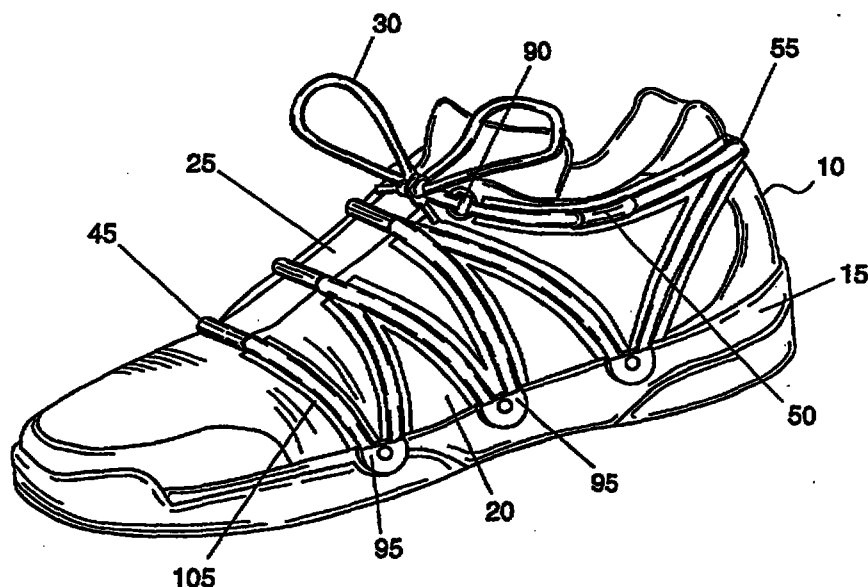

(57) Abstract

This invention relates to a shoe having an ergonomic shoe lace design. The laces pass through tubes on the tongue portion of the shoe and extend down to the sole of the shoe on either side of the shoe where they pass through tubes on or near the perimeter of the sole. The laces crisscross the foot in this manner to secure the foot from up and down motion in the shoe. Optionally the lace may continue to be wrapped around the heel of the foot through ankle tubes and heel tubes to secure the foot from toe to heel movement in the shoe. This is particularly of advantage for shoes used in sporting activities. In this manner the upper of the shoe is not pulled together on either side of the tongue as in conventional shoes, thus avoiding stresses in the upper that tend to put pressure on and rub against the user's foot. Thus the shoe is comfortably and securely held to the user's foot.

SHOE HAVING LACE TUBES

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to shoes and more particularly to the way in which shoe laces are used to ergonomically encase the foot in the shoe comfortably and securely.

Description of the Related Art

In the past most shoes have encased the foot of the wearer by having a tongue which serves to cover an opening in the upper which comprises two halves drawn together over the tongue and secured by laces through eyelets on the upper on either side of the tongue. The laces pull the halves of the upper tightly over the upper portion of the wearers instep and cause stress on the shoe in the region of the tongue downward to where the the upper is attached to the sole. This arrangement also causes this part of the shoe to be drawn tightly to the users foot and can cause uncomfortable rubbing or pressure on the sides of the users foot. The upper secured in this manner also secures the users foot from sliding forward in the shoe and thus secures the heel of the wearers foot to the heel of the shoe in a



ball and socket type arrangement. Rearward force on the wearers foot by tightening the laces keep the foot from disengaging from the shoe. The laces also tend to pull the upper such that the heel is tightly secured to the wearers foot and stresses the upper from front to rear.

SUMMARY OF THE INVENTION

The invention uses a different way of lacing the shoe therein the laces extend from one side of the sole of the shoe across the top of the instep to the other side of the foot and to the sole of the shoe on the opposite side. The shoe laces may then be redirected across the upper to the opposite side or continue under the sole and up on the other side of the foot. Instead of eyelets in the upper, a tube is attached to the tongue to allow the laces to secure the tongue against the foot. The upper is then held against the wearer's foot by the laces surrounding the upper. In this manner there are no stress points in the upper to put pressure on or rub against the users foot, since the upper is not being stretched. Further the laces may be used to engage the wearers heel by passing from the sole of the shoe around the heel and then surround the opening of the top portion of the upper to secure the heel in the shoe. This system eliminates the stress in the upper caused by conventional lacing and the rubbing of the shoe against the wearers foot at these points.

Objects of the Invention

One object of the invention is to secure a shoe to the wearers foot in a manner such as to eliminate stresses in the upper of the shoe and to thus eliminate rubbing and pressure on the wearers foot.

Another object of the invention is to create optimal security of the foot in the shoe without creating stresses in the upper.

Other objects, advantages and novel features of the present invention will become apparent from the following detailed description of the invention when considered in conjunction with the accompanying drawings.

Brief Description of The Drawings

Figure 1 is a perspective view of an embodiment with tongue tubes and sole redirection devices.

Figure 2 is a perspective view of an embodiment of the shoe having a pair of ankle lace tubes and a pair of heel lace tubes.

Figure 3 is a perspective view of an embodiment of the invention having an ankle lace tube and a heel lace tube.

Figure 4 is a perspective view of an embodiment of the shoe having an ankle lace tube a heel lace tube and a lace post.

Figure 5 is a rear view of a shoe showing a heel tube.

Figure 6 is a perspective view of the shoe of figure 4 with a pulley type redirection device and pressure displacement strips.

Figure 7 is the shoe as shown in figure 6 with shoe laces.

Figure 8 is a side view of a pulley redirection device.

Figure 9 is a front view of a lace post.

Figure 10 is a top view of a shoe showing tension vectors in the shoe laces.

Figure 11 is a bottom view of a shoe having the laces passing under the shoe.

Detailed Description of The Preferred Embodiment

Figure 1 shows a shoe 10 having a sole 15, an upper 20, a tongue 25, a lace 30, a redirection device 40, and a tongue tube 45. The shoe has a toe 85 and a heel 80. The shoe has conventional means of construction having a sole 15, with an upper 20, attached by conventional means well known in the art.

The shoe laces 30, secure the foot of the wearer in the shoe 10, by means of being laced through a series of tongue tubes 45 and redirection devices 40. Redirection devices 40, are positioned on the perimeter of the sole 15. Tongue tubes 45, are attached at the center of the upper 20 generally on the center of the tongue or tongue portion 25 of the shoe. By passing the lace 30, from a first tongue tube 45 nearest

the toe 85 of the shoe, downward to the redirection device 40, then upward back across the upper 20 by passing through a second tongue tube 45 and down to a second redirection device, and so on, through the remainder of the redirection devices 40 and tongue tubes 45. The shoe laces may then be tied or otherwise secured at the top of the tongue. In this manner the shoe can be secured to the wearer's foot without the upper being stressed, stretched and pulled together by traditional laces in eyelets on either side of the tongue of the shoe. The laces 30, passing from the sole 15, at the base of the upper 20, across the wearers foot to the redirection device 40, at the sole 15, on the other side of the shoe moves the function of securing the shoe around the users foot from the shoe upper itself to the laces on the outside of the shoe. This eliminates the stresses in the upper which occur in conventional shoes and eliminates pressure points on the wearer's foot which may be caused by such pulling on the upper by the conventional positioning of shoe laces. Since the shoe laces in the present design are on the outside of the upper they hold the tongue down against the wearer's foot without stressing the sides of the upper. The laces being on the outside of the upper and being laid on top of the contours of the foot will not cause stresses in the upper which are pulled against and rub the wearer's foot.

As shown in figure 1 the shoe may be held to the wearers foot with only a lace going through redirection devices 40 and tongue tubes 45. This arrangement holds the wearers foot from coming up and out of the shoe by securing the upper 20, to the sole 15, with the wearer's foot therebetween. However in another embodiment, especially for sports shoe use, the shoe should also be secured on the foot to prevent toe 85, to heel 80, movement. In order to more securely secure the foot in the shoe so that the heel of the wearer's foot remains securely in the heel 80, of the shoe, the lace 30, may be extended from the tongue 25, through an ankle tube 50 as in figure 2, to a heel tube 55, and then back to the front of the shoe through a second ankle tube 50 and tied on the front of the shoe.

In the embodiment in figure 2 the lace extends from a tongue tube 45, to an ankle tube 50, through a heel tube 55, then back through a second ankle tube 50 on the other side of the shoe, to the tongue 25, where the lace 30, is tied.

In the embodiment in figure 3 the heel of the wearers foot is secured in the shoe by the lace 30, extending from a tongue tube 45, to a redirection device 40, then through a heel tube 55 and back through an ankle tube 50, to the tongue 25, where the lace 30, is tied.

In the embodiment in figure 4 the heel of the wearers foot is secured in the shoe by the lace running from a tongue tube 45 to a redirection device 40, to a heel tube 55

to an ankle tube 50, then through a lace post 90, attached to the upper, and then to the tongue 25 where the lace is tied.

Figure 5 shows the rear of the shoe featuring a heel tube 55 secured to the heel 80 of the shoe. Figure 5 shows the first side 70 and the second side 75 of the shoe. In figures 3 and 5 the heel tube a single tube with two sections of laces passing therethrough. In figure 2, two heel tubes are employed having a separate tube for each lace section.

Figure 6 shows another embodiment of the invention having pressure displacement strips 105, on the upper 20, for displacing the pressure of the laces over a larger area and thus eliminating possible pressure of the laces on the wearer's foot.

Figure 7 shows the laces on the shoe of the embodiment shown in figure 6. The laces 30, are on top of the pressure displacement strips.

Figure 8 shows a redirection device 95, having a pulley inside to make it easier to tighten the laces. The pulley type redirection devices are shown on the shoes in figures 6 and 7.

Figure 9 shows a front view of the lace post 90 having an axle 110 to pivot the lace post on the upper 20. In some embodiments the lace post is placed through the tongue 25,

therefore the tongue is secured in place relative to the upper when lace 30, is threaded through the lace post 90.

Figure 10 shows the tension vectors in the laces 30, on the shoe. It shows how the laces carry the tension which secures the shoe to the wearer's foot. The upper 20, has no tension vectors indicating that the upper is not being stretched and pulled over the users foot. Therefore there are no pressure points on the users foot induced by a stretching upper.

Figure 11 shows another embodiment of the invention herein the laces 30 pass through sole tubes 120, in the sole 15, of the shoe 10. By using sole tubes the laces need not be redirected back up over the upper 20 by redirection devices 40. The sole tubes allow the laces to pass under the wearer's foot and come up on the other side of the shoe, thus wrapping the users foot into the shoe.

The tongue tubes 45, redirection devices 40, ankle tubes 50, and heel tubes 55, may be semi circular having the shoe upper as one boundary and may be made of any materials which are flexible to conform the the shape of the foot. The tubes may be secured to the shoe by stitching gluing or other means of attachment.

It is to be understood that the invention is not limited to applications for shoes but may also be applied to boots, skates, ski boots and other footwear.

Obviously, many modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that, within, the scope of the appended claims, the invention may be practiced otherwise than as specifically described.



10



What is claimed is:

1. A shoe having lace tubes comprising,

a sole having a perimeter, an upper having a tongue portion, the upper attached to the sole, the shoe having a first side and a second side, a heel and a toe,

a plurality of redirection devices attached to the shoe at the perimeter of the sole on the first side and the second side, and a plurality of tongue tubes attached to the tongue portion,

such that a lace extending through the redirection devices and the tongue tubes in criss cross fashion and tied, secures the shoe to the foot of a wearer.

2. A shoe having lace tubes as in claim 1 wherein,

the upper has an ankle tube and a heel tube such that the lace extends through the ankle tube and heel tube to secure the shoe to the foot of the wearer.

3. A shoe having lace tubes as in claim 1 wherein,

the redirection device has a pulley.

4. A shoe having lace tubes as in claim 1 wherein,

the upper has a lace post attached.

5. A shoe having lace tubes as in claim 1 wherein,

pressure displacement strips are attached to the upper to spread the pressure of the laces out over a larger area making the shoe more comfortable for the wearer.



6. A shoe having lace tubes as in claim 2 wherein,
the redirection devices have pulleys.
7. A shoe having lace tubes as in claim 2 wherein,
the tongue has a lace post attached.
8. A shoe having lace tubes comprising,
a sole, an upper having a tongue portion, the upper
attached to the sole, the shoe having a first side and a
second side, a heel and a toe,
sole tubes in the sole for passing laces therethrough,
a plurality of tongue tubes attached to the tongue
portion,
such that a lace extending through the sole tubes and
the tongue tubes in criss cross fashion and tied, secures
the shoe to the foot of a wearer.
9. A shoe having lace tubes as in claim 8 wherein,
the upper has an ankle tube and a heel tube such that
the lace extends through the ankle tube and heel tube to
secure the shoe to the foot of the wearer.
10. A shoe having lace tubes as in claim 8 wherein,
pressure displacement strips are attached to the upper
to spread the pressure of the laces out over a larger area
making the shoe more comfortable for the wearer.



12



11. A shoe having lace tubes as in claim 9 wherein,
pressure displacement strips are attached to the upper
to spread the pressure of the laces out over a larger area
making the shoe more comfortable for the wearer.
12. A shoe having lace tubes as in claim 9 wherein,
the tongue has a lace post attached.
13. A shoe having lace tubes as in claim 4 wherein,
the tongue has a lace post aperture, such that the lace
post when passed through the lace post aperture secures the
tongue to the upper.
14. A shoe having lace tubes as in claim 7 wherein,
the tongue has a lace post aperture, such that the lace
post when passed through the lace post aperture secures the
tongue to the upper.
15. A shoe having lace tubes as in claim 12 wherein,
the tongue has a lace post aperture, such that the lace
post when passed through the lace post aperture secures the
tongue to the upper.

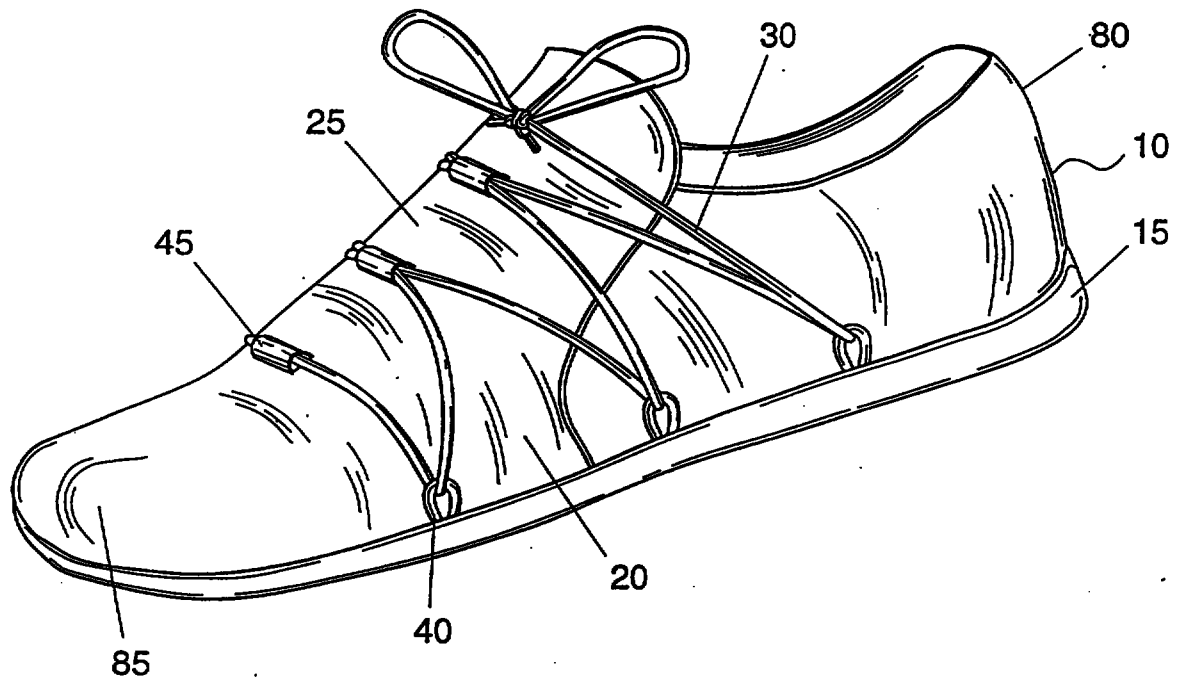


Fig. 1

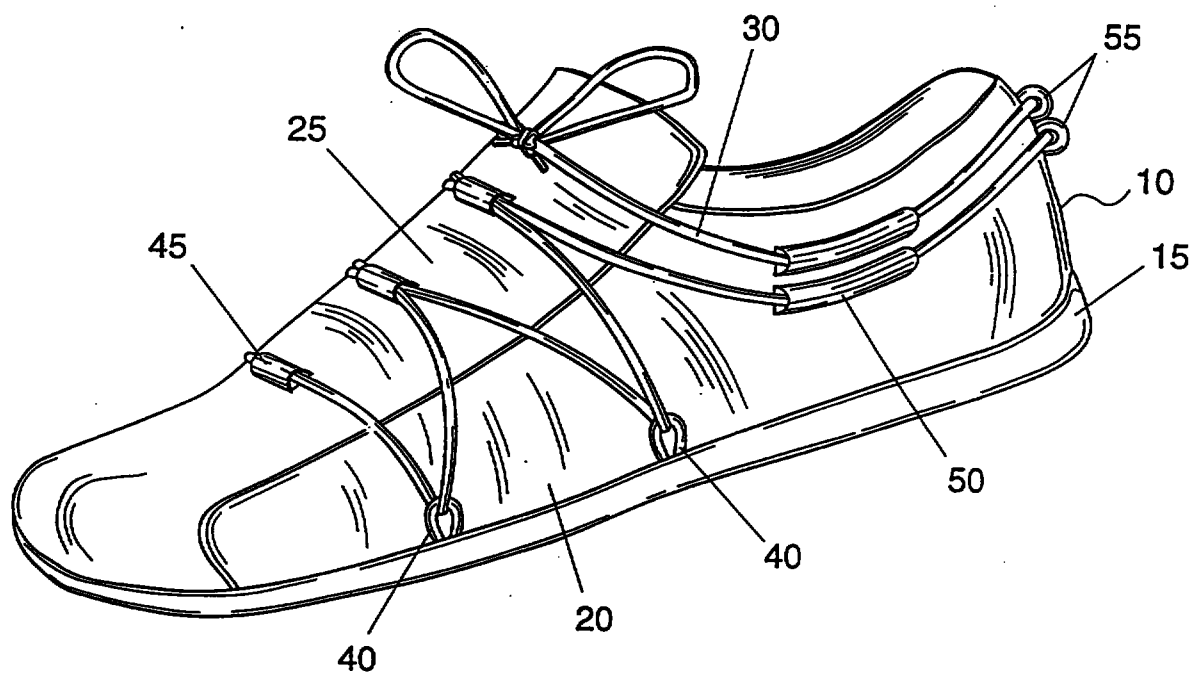


Fig. 2

3/11

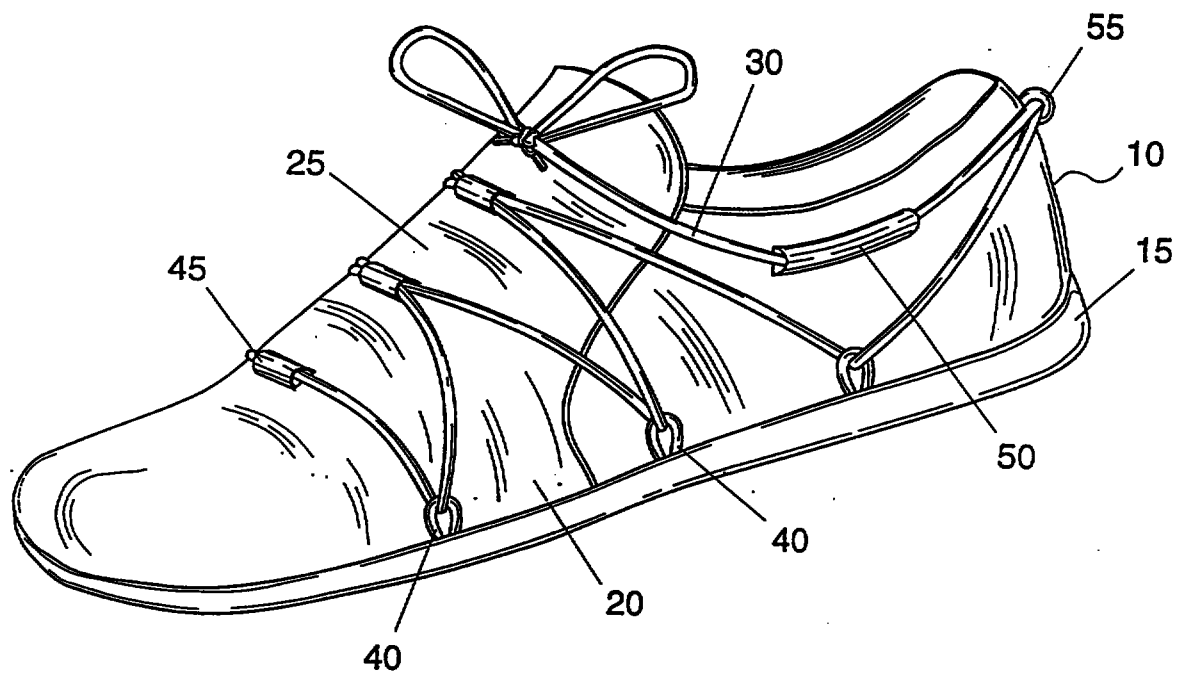


Fig. 3

4/11

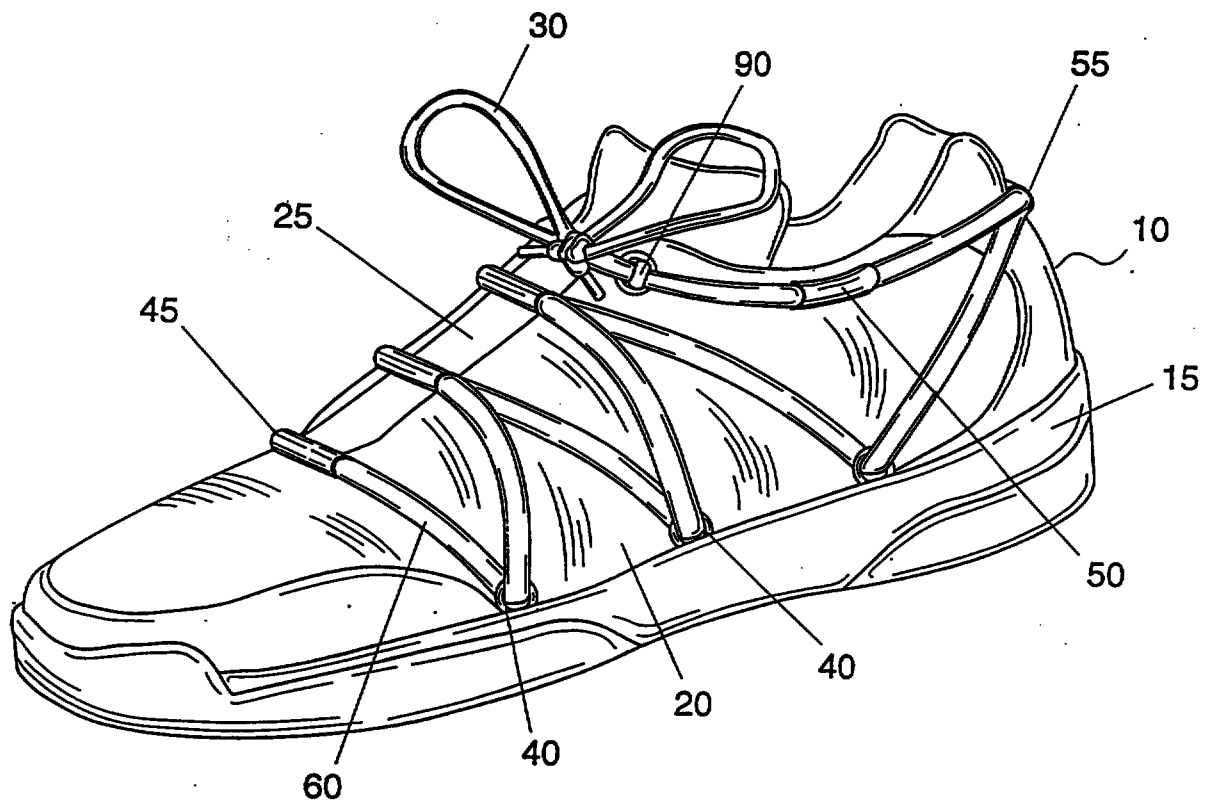


Fig. 4

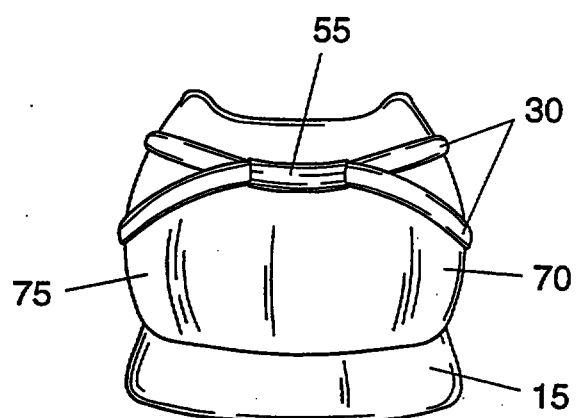


Fig. 5

6/11

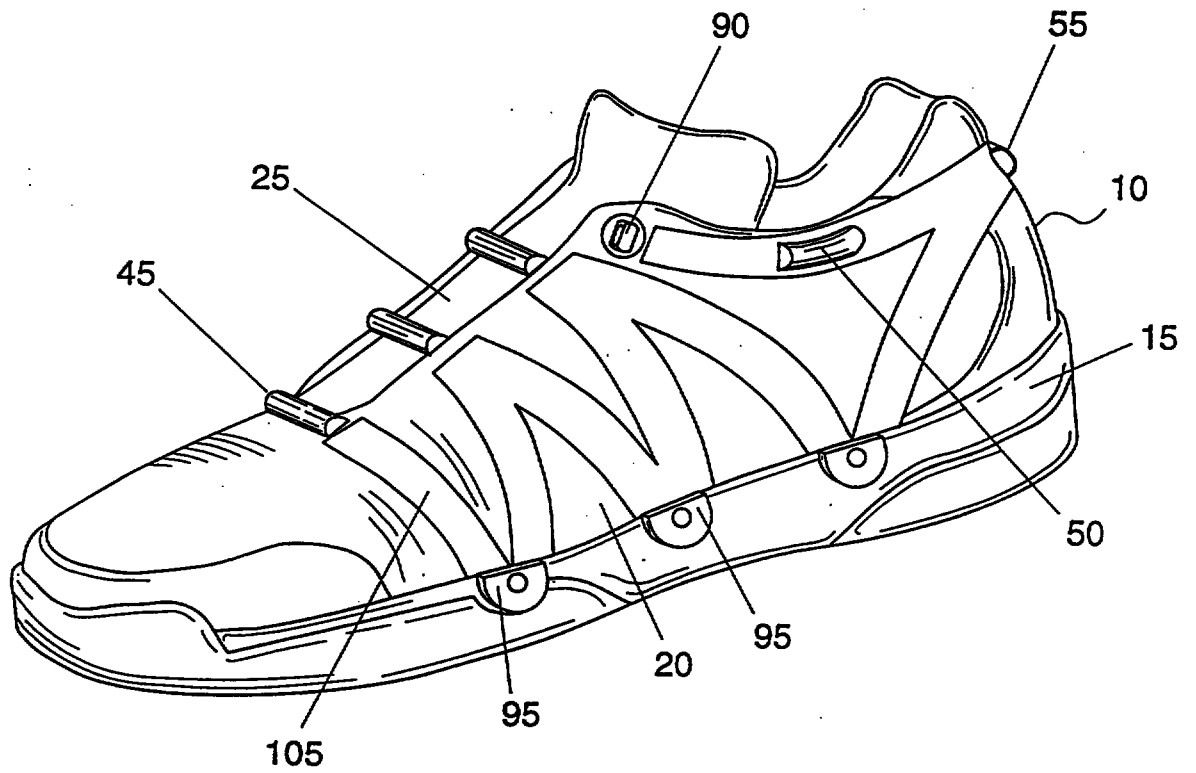


Fig. 6

7/11

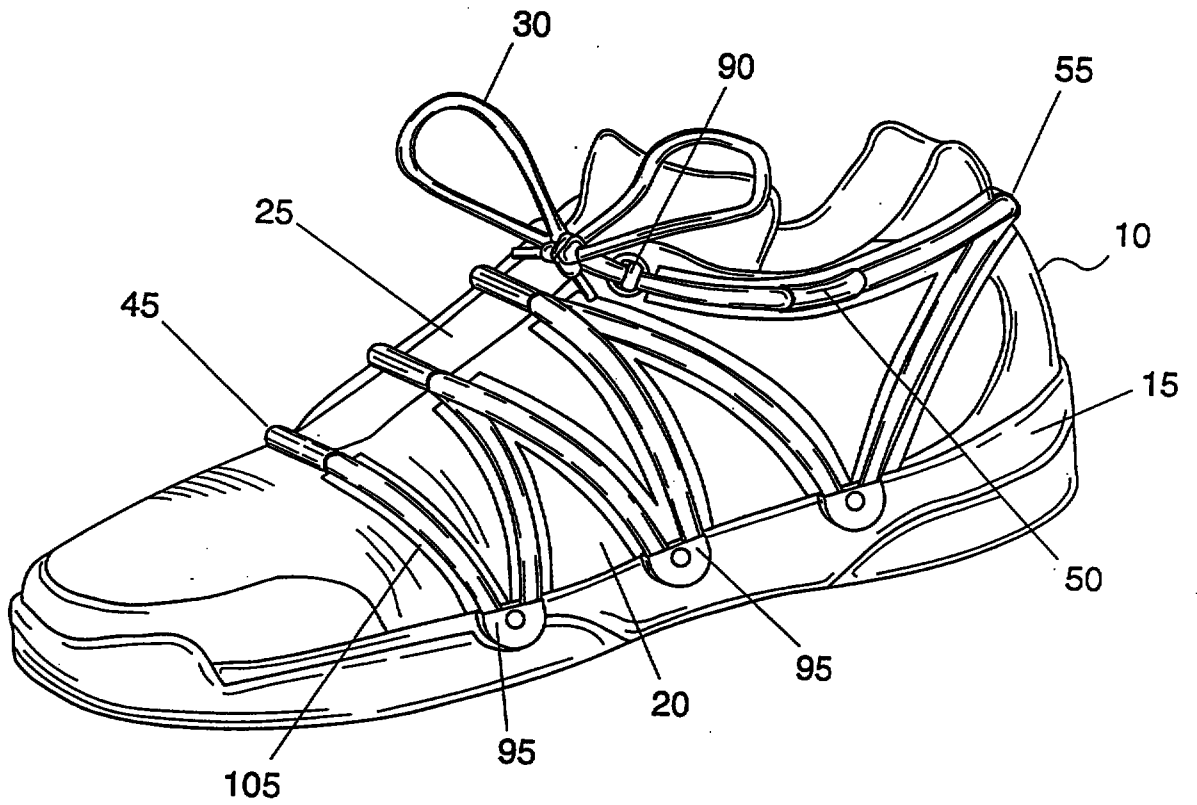


Fig. 7

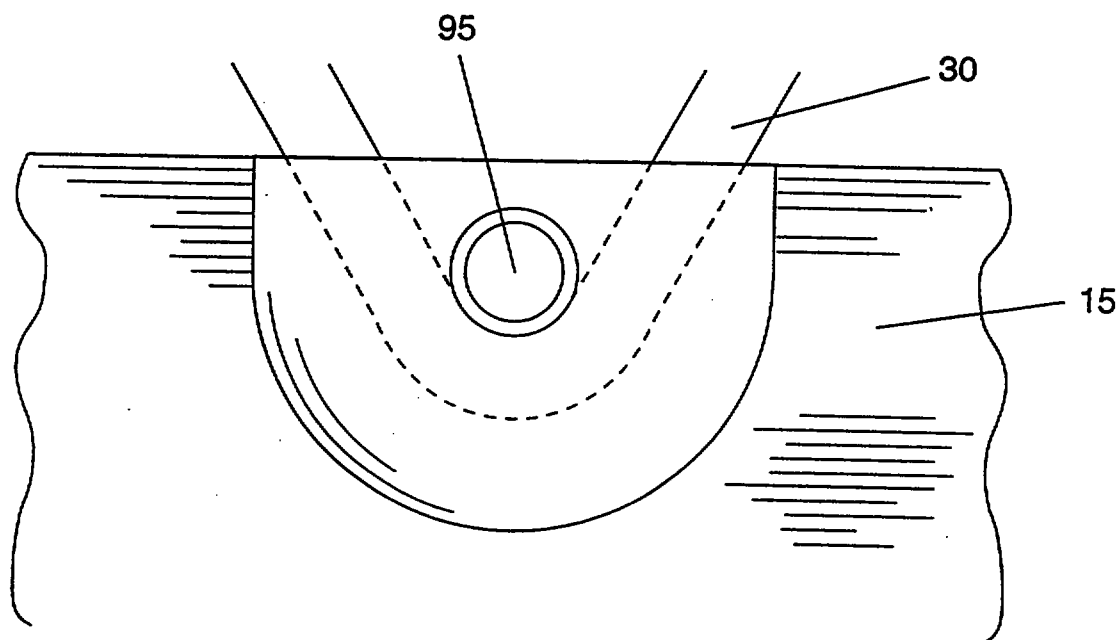


Fig. 8

9/11

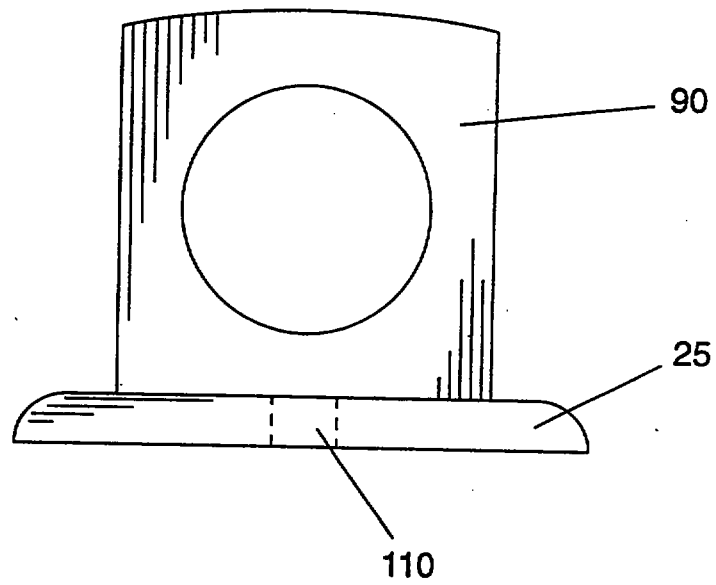


Fig. 9

10/11

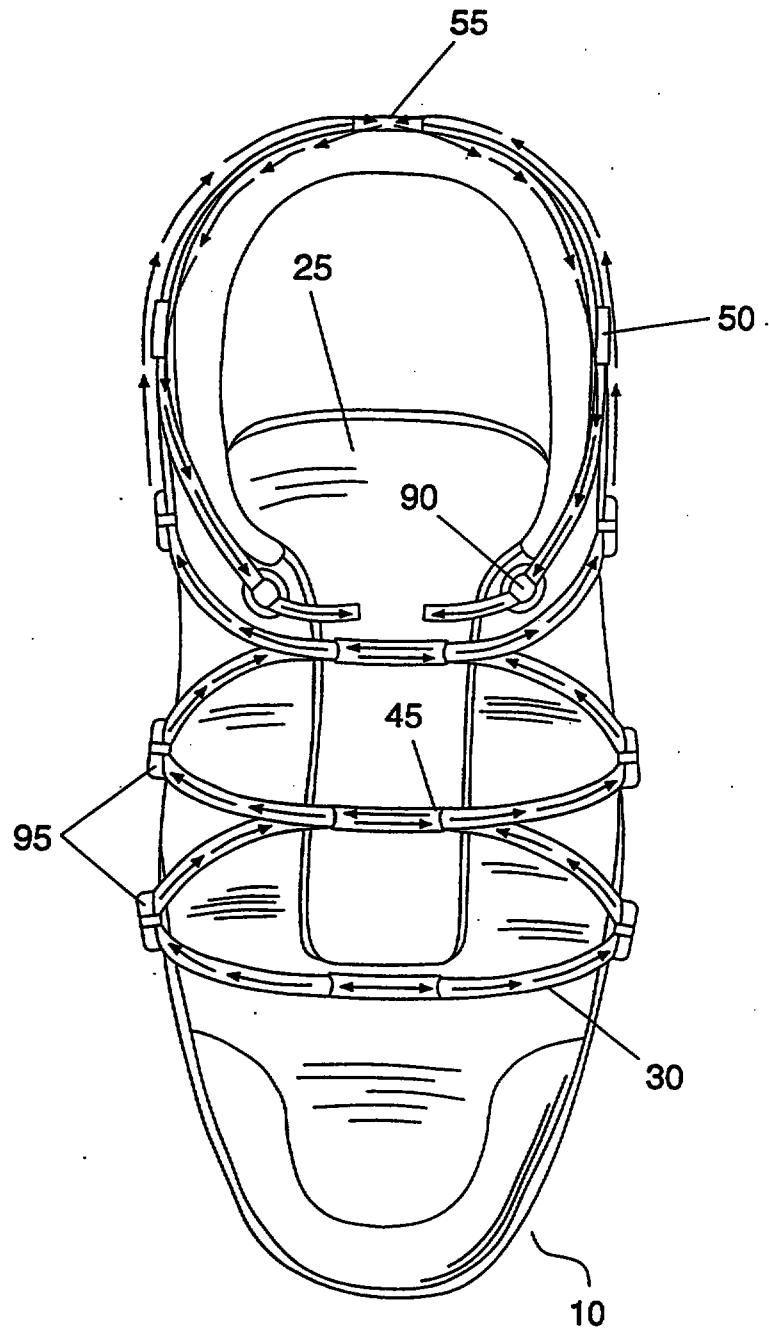


Fig. 10

11/11

This Sheet Has Been Replaced

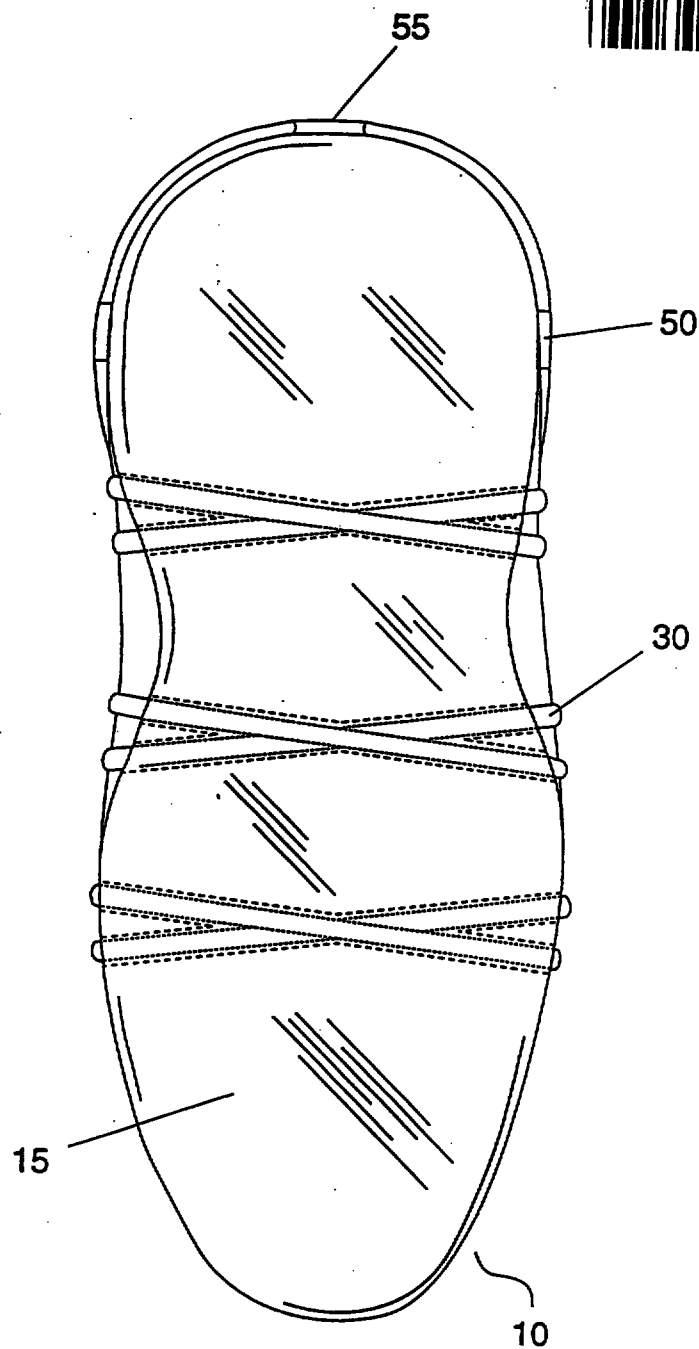


Fig. 11

SUBSTITUTE SHEET (RULE 26)

ball and socket type arrangement. Rearward force on the
wearer's foot by tightening the laces keep the foot from
disengaging from the shoe. The laces also tend to pull
the upper such that the heel is tightly secured to the
5 wearer's foot and stresses the upper from front to rear.


German Patent DE-V-1875052 discloses a shoe having
a sole with a perimeter, an upper attached to the sole,
the upper having a tongue portion. The shoe has a first
and a second side, a heel and a toe. A plurality of
10 redirection devices are attached to the upper adjacent
tongue portion. A plurality of tongue tubes are
attached to the tongue portion. A lace extending
through the redirection devices and the tongue tubes in
criss cross fashion and tied secures the shoe to the
15 foot of the wearer.

SUMMARY OF THE INVENTION

The invention is an improvement in a shoe with a
first side and a second side and having a sole, an upper
attached to the sole, the upper having a tongue portion,
20 a heel and a toe, and a plurality of tongue tubes
attached to the tongue portion, the invention
characterized by a plurality of redirection devices
attached to the shoe at the perimeter of the sole on the
first and second side of the shoe so that a shoe lace
25 extending through the redirection devices and the tongue
tubes in a criss cross fashion and tied, secures the
shoe to the wearer's foot with the securing forces
distributed over the sides and top of the foot. In an
alternative embodiment of the present invention the shoe
30 has a plurality of side tubes in the sole and the shoe
lace extends through the sole tubes beneath the wearer's
foot and through the tongue tubes to secure the shoe to
the wearer's foot.


The invention uses a different way of lacing the
35 shoe therein the laces extend from one side of the sole
of the shoe across the top of the instep to the other
side of the foot and to the sole of the shoe.

AMENDED SHEET
IPEA/EP

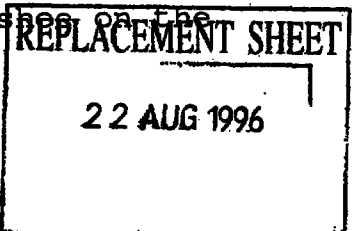

opposite side. The shoe laces may then be redirected across the upper to the opposite side or continue under the sole and up on the other side of the foot. Instead
5 of eyelets in the upper, a tube is attached to the tongue to allow the laces to secure the tongue against the foot. The upper is then held against the wearer's foot by the laces surrounding the upper. In this manner there are no stress points in the upper to put pressure
10 on or rub against the user's foot, since the upper is not being stretched. Further the laces may be used to engage the wearer's heel by passing from the sole of the shoe around the heel and then surround the opening of the top portion of the upper to secure the heel in the
15 shoe. This system eliminates the stress in the upper caused by conventional lacing and the rubbing of the shoe against the wearer's foot at these points.

AMENDED SHEET
IPEA/EP

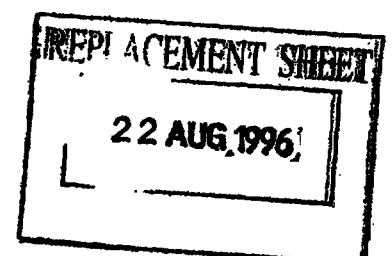



What is claimed is:

1. A shoe (10) having a sole (15), and upper (20) having a tongue portion (25), the upper (20) attached to the sole (25), the shoe having a first side and a second side, a heel (80) and a toe (85), a plurality of tongue tubes (45) attached to the tongue portion (25), the invention characterized by:

a plurality of redirection devices (40) attached to the shoe (10) at the perimeter of the sole (25) on the first side and the second side such that a lace (30) extending through the redirection devices (40) and the tongue tubes (45) in a criss cross fashion and tied, secures the shoe (10) to the foot of a wearer with the securing forces distributed over the sides and top of the foot.

2. A shoe (10) having lace tubes (45) as in claim 1 wherein,

the upper (20) has an ankle tube (50) and a heel tube (55) such that the lace (30) extends through the ankle tube (50) and heel tube (55) to secure the shoe (10) to the foot of the wearer.

3. A shoe (10) having lace tubes (45) as in claim 1 wherein,

the redirection device (40) has a pulley.


4. A shoe (10) having lace tubes (45) as in claim 1 wherein,

the upper (20) has a lace post (90) attached.

5. A shoe (10) having lace tubes (45) as in claim 1 wherein,

pressure displacement strips (105) are attached to the upper (20) to spread the pressure of the laces (30) out over a larger area making the shoe (10) more comfortable for the wearer.

AMENDED SHEET
IPEA/EP

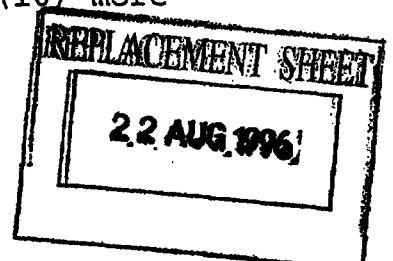



6. A shoe (10) having lace tubes (45) as in claim 2 wherein,

the redirection devices (40) have pulleys.

5 7. A shoe (10) having lace tubes (45) as in claim 2 wherein,

the tongue (25) has a lace post (90) attached.

8. A shoe (10) having a sole (15), an upper (20)
10 having a tongue portion(25), the upper (20) attached to the sole (15), the shoe (10) having a first side and a second side, a heel (80) and a toe (85), a plurality of tongue tubes (45) attached to the tongue portion(25), the invention characterized by:

15 a plurality of sole tubes (120) in the sole (15) such that a lace (30) extending through the sole tubes (120) and the tongue tubes (45) in criss cross fashion and tied, secures the shoe (10) to the foot of the wearer.

20

9. A shoe (10) having lace tubes (45, 120) as in claim 8 wherein,


the upper (20) has an ankle tube (50) and a heel tube (55) such that the lace (30) extends through the
25 ankle tube (50) and heel tube (55) to secure the shoe (10) to the foot of the wearer.

10. A shoe (10) having lace tubes (45, 120) as in claim 8 wherein,

30 pressure displacement strips (105) are attached to the upper (20) to spread the pressure of the laces (30) out over a larger area making the shoe (10) more comfortable for the wearer.

35 11. A shoe (10) having lace tubes (45, 50, 55, 120) as in claim 9 wherein,

AMENDED SHEET
IPEA/EP

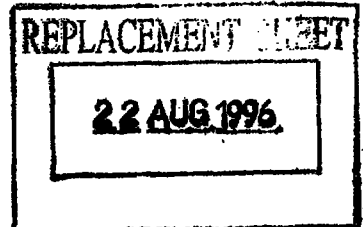



pressure displacement strips (105) are attached to the upper (20) to spread the pressure of the laces (30) out over a larger area making the shoe (10) more comfortable for the wearer.

5

12. A shoe (10) having lace tubes, (45, 50, 55, 120) as in claim 9 wherein,

the tongue (25) has a lace post (90) attached.

10 13. A shoe (10) having lace tubes (45) as in claim 4 wherein,

the tongue (25) has a lace post aperture, such that the lace (90) post when passed through the lace post aperture secures the tongue (25) to the upper (20).


15

14. A shoe (10) having lace tubes (45, 50, 55) as in claim 7 wherein,

the tongue (25) has a lace post aperture, such that the lace post (90) when passed through the lace post aperture secures the tongue (25) to the upper (20).

15. A shoe (10) having lace tubes (45, 50, 55, 120) as in claim 12 wherein,

the tongue (25) has a lace post aperture, such that the lace post (90) when passed through the lace post aperture secures the tongue (25) to the upper (20).

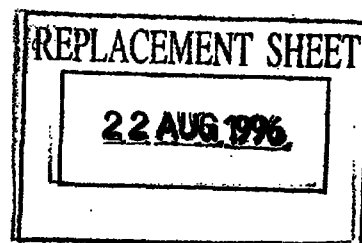

AMENDED SHEET
IPEA/EP


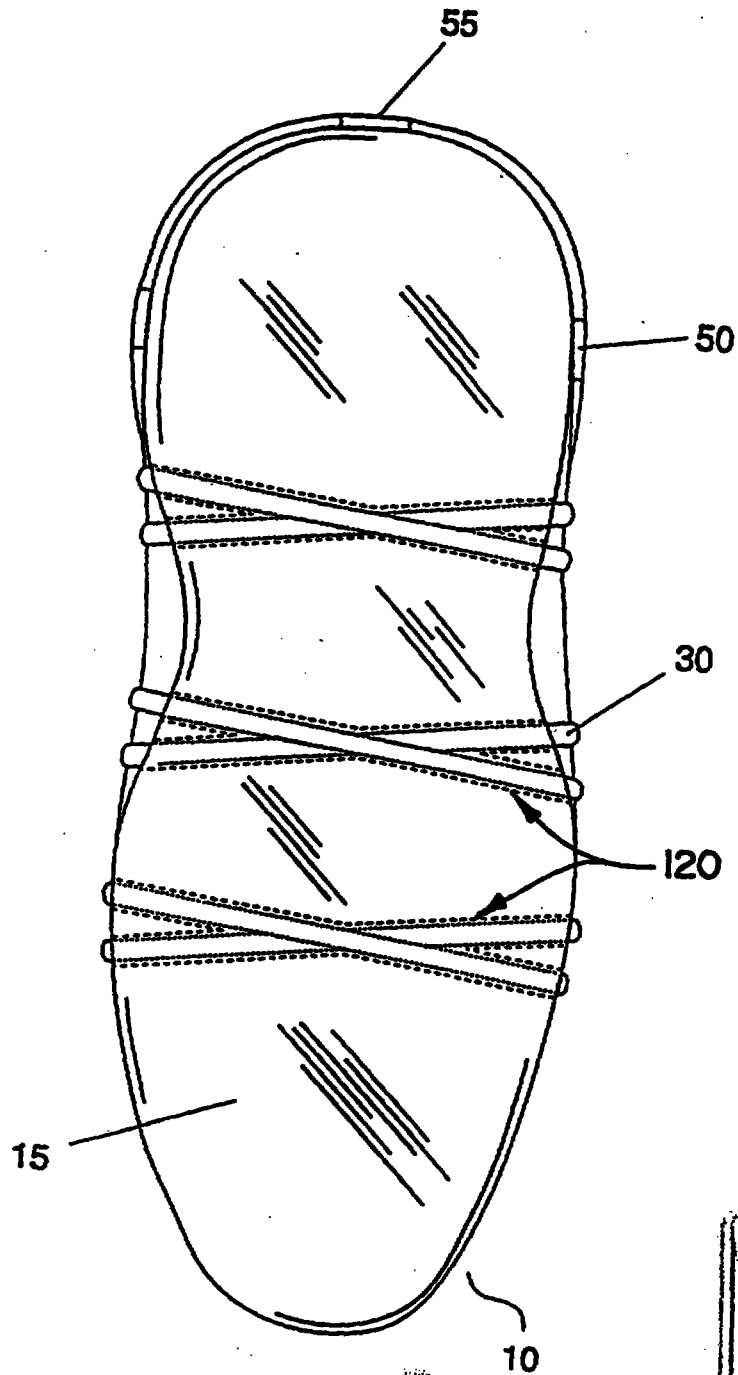


Fig. 11

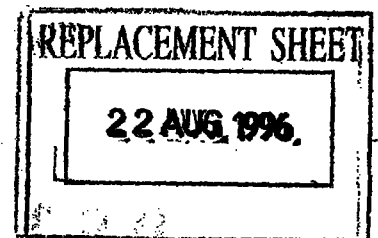

AMENDED SHEET
IPER/EP