

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 August 2001 (02.08.2001)

PCT

(10) International Publication Number
WO 01/55649 A1

(51) International Patent Classification⁷: **F24F 13/20**

(21) International Application Number: **PCT/JP01/00307**

(22) International Filing Date: 18 January 2001 (18.01.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2000-20227 28 January 2000 (28.01.2000) JP
2000-33785 10 February 2000 (10.02.2000) JP

(71) Applicant (for all designated States except US):
TOSHIBA CARRIER CORPORATION [JP/JP];
1-1, Shibaura 1-chome, Minato-ku, Tokyo 105-8001 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **OKUDA, Kenji**
[JP/JP]; C-201, Toshiba-Tagonouraryo, 100, Yanagishima,
Fuji-shi, Shizuoka 416-0932 (JP). **GAJINA, Kenji**
[JP/JP]; C-307, Toshiba-Tagonouraryo, 100, Yanagishima,
Fuji-shi, Shizuoka 416-0932 (JP).

(74) Agents: **SUZUYE, Takehiko et al.; SUZUYE & SUZUYE, 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 100-0013 (JP).**

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: CASSETTE TYPE AIR CONDITIONER FOR MOUNTING IN THE CEILING

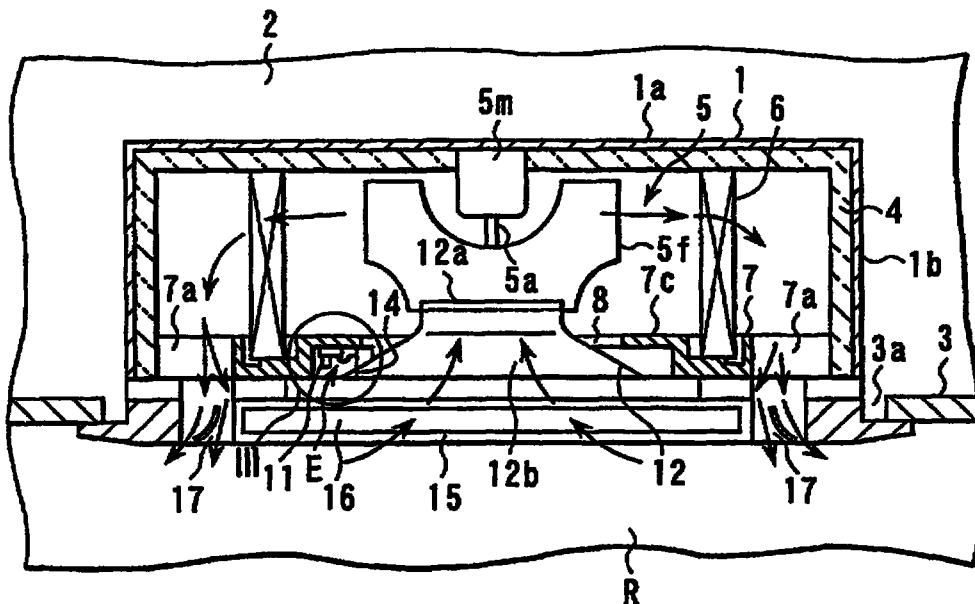

(57) Abstract: A ceiling cassette type air conditioner comprises a housing (101) provided on the ceiling panel of a room (R) and having a bottom opening, a bell-mouth (112) provided in the housing (101) and having a bottom opening (112b) and an outer circumferential surface, an electrical part box (111) provided in the housing (101) and accommodating electrical part (E), wherein the electrical part box (111) is arranged near that side of the bell-mouth (112) at which secondary air flows, the electrical parts (E) are mounted on a control board (S) provided in the electrical part box (111), and those of the electrical parts (Ea) which are located near the outer circumferential surface of the bell-mouth (112) are less tall than the other electrical parts (Ec).



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.