



(51) International Patent Classification:
A47J 31/30 (2006.01)

(21) International Application Number:
PCT/EP2008/062511

(22) International Filing Date:
19 September 2008 (19.09.2008)

(25) Filing Language: English

(26) Publication Language: English

(72) Inventor; and

(71) Applicant : BRIZIO, Adriana [IT/CH]; Via Ceresio,
18, CH-6977 Ruvigliana (CH).

(74) Agents: RIPAMONTI, Enrico et al.; GIAMBROCONO
& C. S.p.A., Via Rosolino Pilo, 19/B, I-20129 Milano
(IT).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,

EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CAN FOR THE EXTEMPORANEOUS PREPARATION OF BEVERAGES BY EXTRACTION AND/OR INFUSION, PROVIDED WITH A SAFETY LID

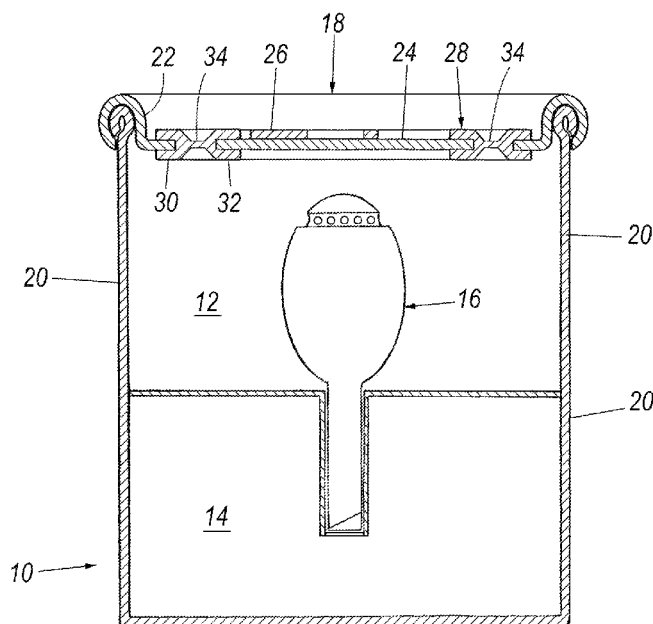


Fig. 1

(57) Abstract: The can (10; 10A; 10B; 10C) for the extemporaneous preparation of beverages by extraction and/or infusion comprises a first chamber (12) intended to collect the final beverage, a second chamber (14) containing a drinkable liquid and a filtering device (16) containing a substance able to produce the required beverage by extraction and/or infusion. The can is foreseen to be put onto a heating source after opening the can lid (18; 18A, 18B; 18C) and operating the filtering device (16) by the user. The lid (18; 18A, 18B; 18C) comprises: an outer rim portion (22; 22B) intended to remain fixed to the can lateral wall (20) when opening the can; an inner removable portion (24; 24A; 24B; 24C) intended to be ripped in order to open the can; and a predetermined breaking line (34) separating said inner removable portion (24; 24A; 24B; 24C) from said outer rim portion (22; 22B). The breaking line (34) is provided in an annular portion (28; 28A; 28B; 28C) forming part of the lid (18; 18A, 18B; 18C) and made of plastic material. The outer part (32; 32B) of the annular portion (28; 28A; 28B; 28C) is part of the outer rim portion (22; 22B) while the inner part thereof (24; 24A; 24B; 24C) is part of the inner removable portion (24; 24A; 24B; 24C).