

1/11

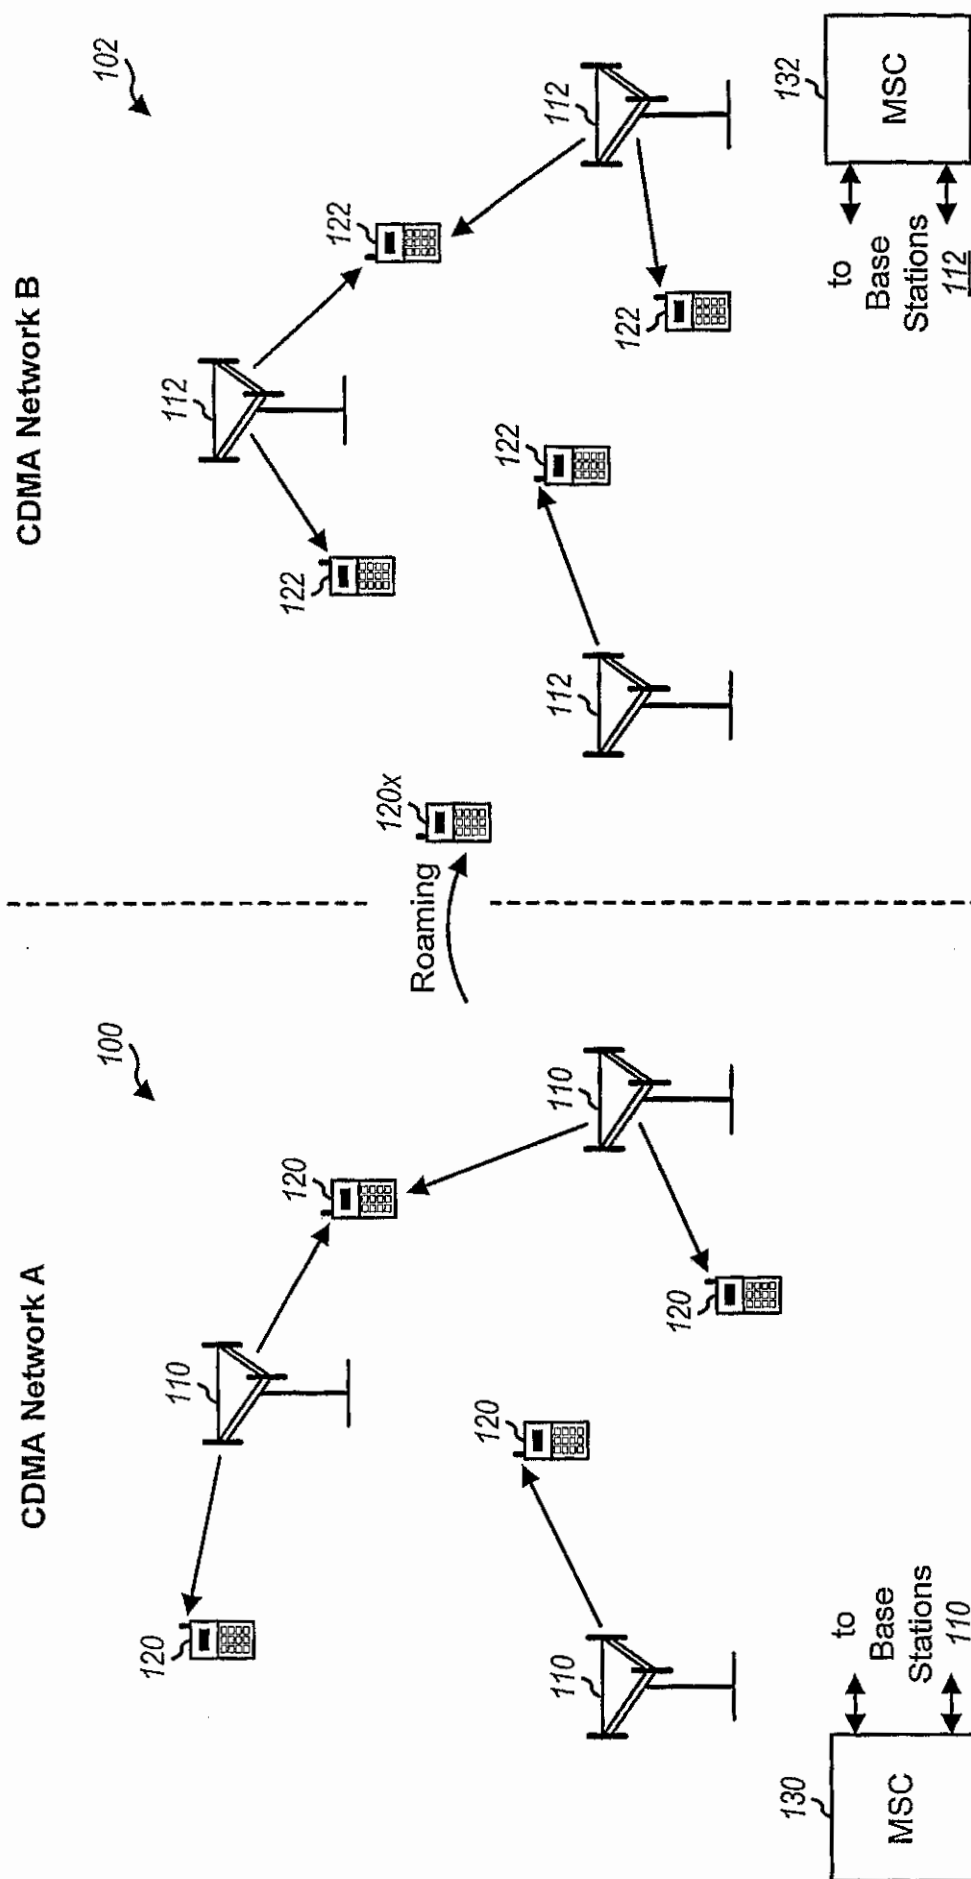


FIG. 1

Preferred Roaming List (PRL)

200



System Table

GEO L					GEO 1		
GEO 3					GEO 2		GEO 1
Permitted Systems 220	System (SID, NID)	Selection Preference	Roaming Indication	Acquisition Index			
	SID/NID	First	Off	0			
	SID/NID	Second	On	1			
	SID/NID	Second	On	2			
	SID/NID	Third	Flashing	4			
Forbidden Systems 230	SID/NID	-	-	-			
	SID/NID	-	-	-			
	SID/NID	-	-	-			

Acquisition Table


250

Index	System Type	Channels /Blocks
0	Cellular CDMA (Standard Channels)	B
1	Cellular CDMA (Standard Channels)	A
2	Cellular Analog	A
3	Cellular Analog	B
4	PCS CDMA (Using Channels)	425
5	PCS CDMA (Using Blocks)	F

2/11

FIG. 2

3/11

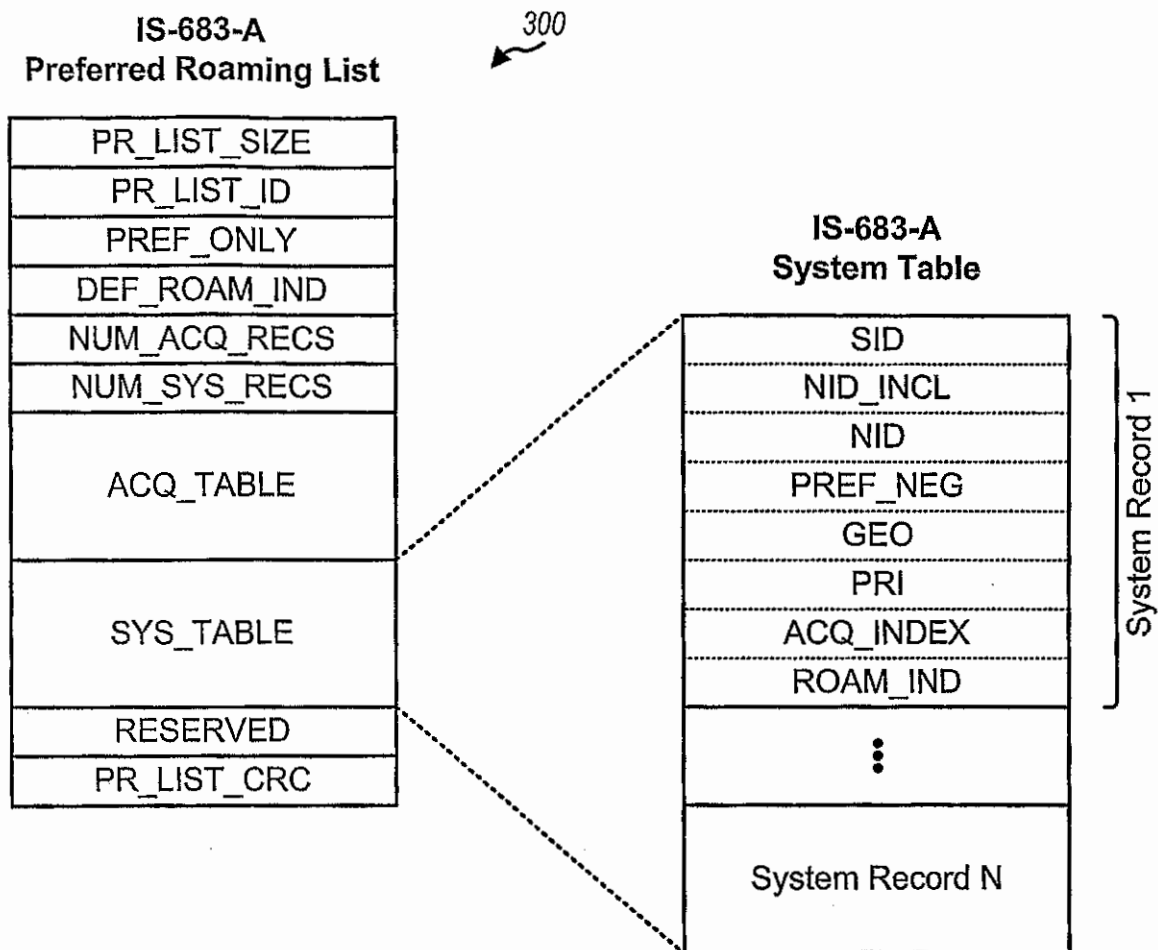**FIG. 3**

4/11

**IS-683-C
Extended
Preferred Roaming List**

PR_LIST_SIZE
PR_LIST_ID
CUR_SSPP_P_REV
PREF_ONLY
DEF_ROAM_IND
NUM_ACQ_RECS
NUM_COMMON_SUBNET_RECS
NUM_SYS_RECS
RESERVED
EXT_ACQ_TABLE
COMMON_SUBNET_TABLE
EXT_SYS_TABLE
RESERVED
PR_LIST_CRC

400



**IS-683-C
Extended System Table**

SYS_RECORD_LENGTH
SYS_RECORD_TYPE
PREF_NEG
GEO
PRI
ACQ_INDEX
Type-specific system ID record
ROAM_IND
ASSOCIATION_INC
ASSOCIATION_TAG
PN_ASSOCIATION
DATA_ASSOCIATION
RESERVED
⋮
Extended System Record N

Extended System Record 1

FIG. 4

5/11

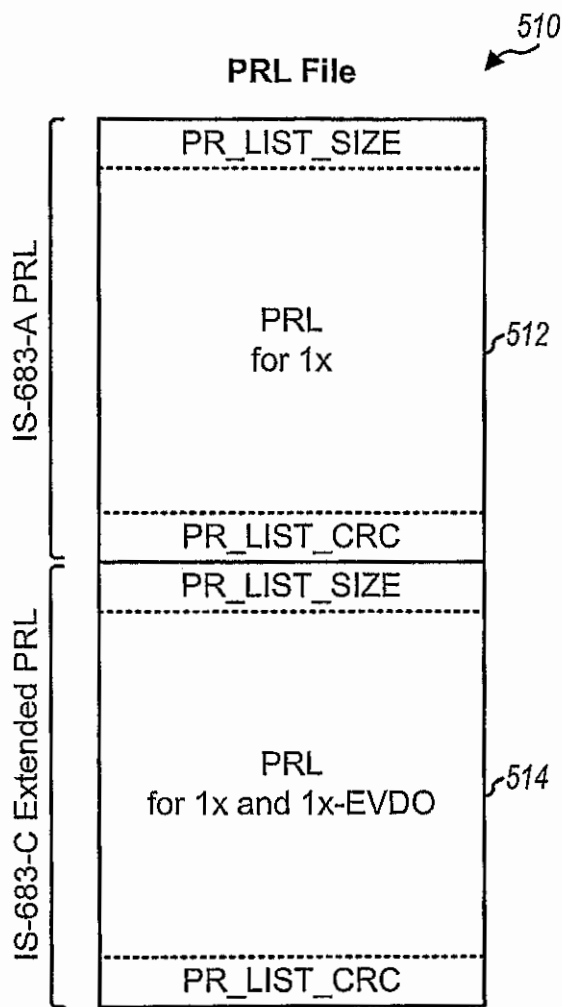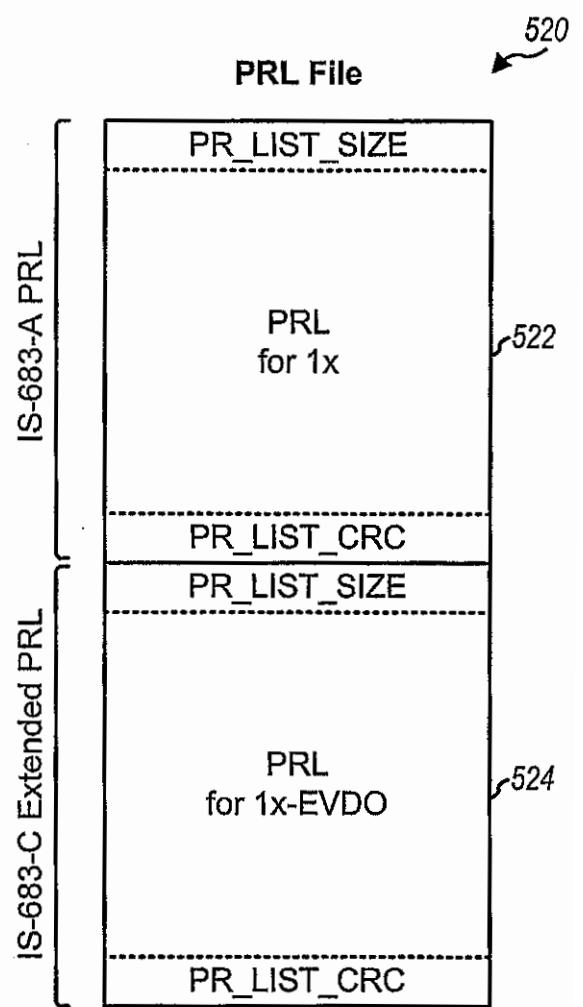**FIG. 5A****FIG. 5B**

6/11

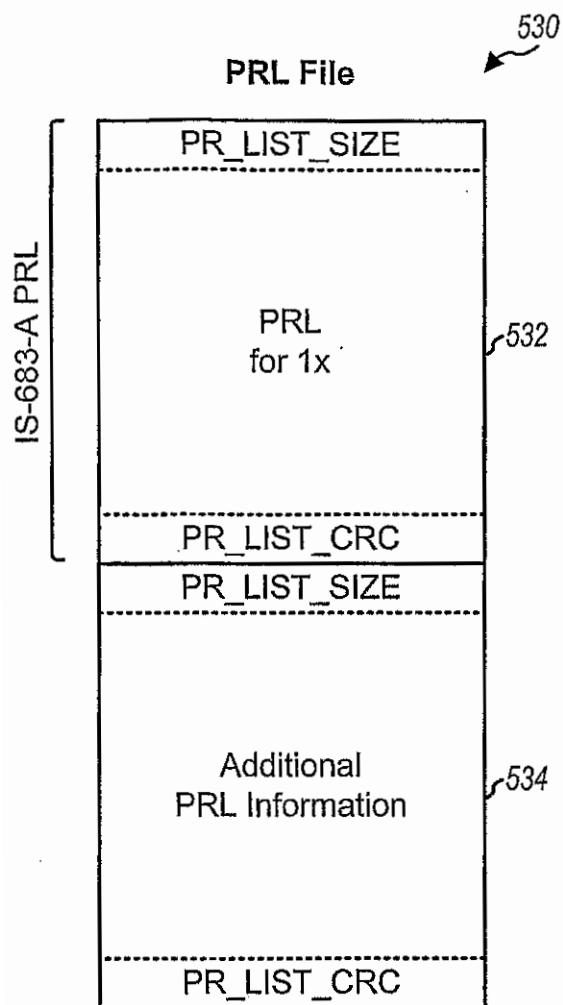


FIG. 5C

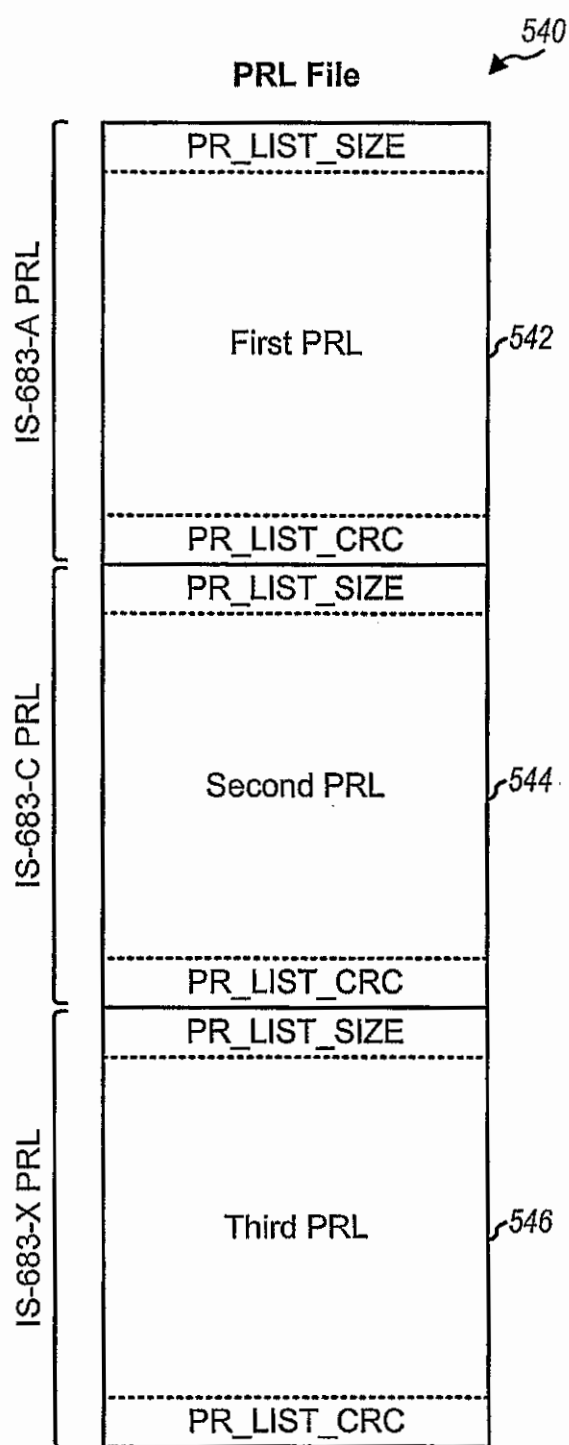
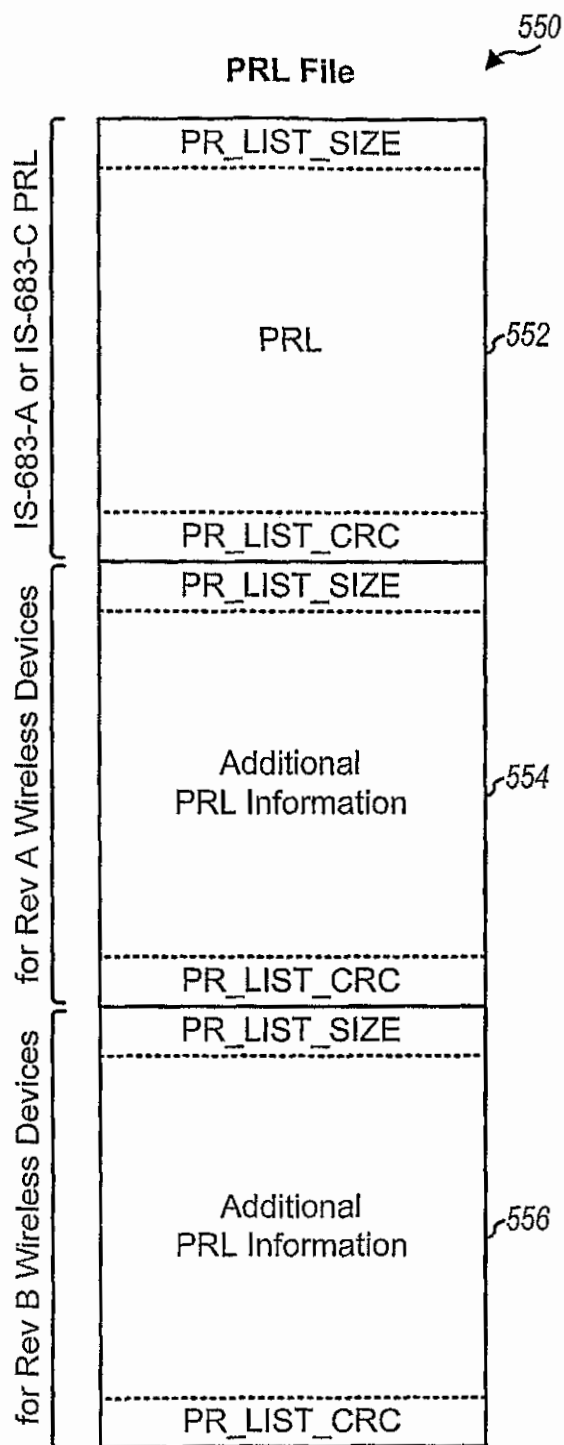
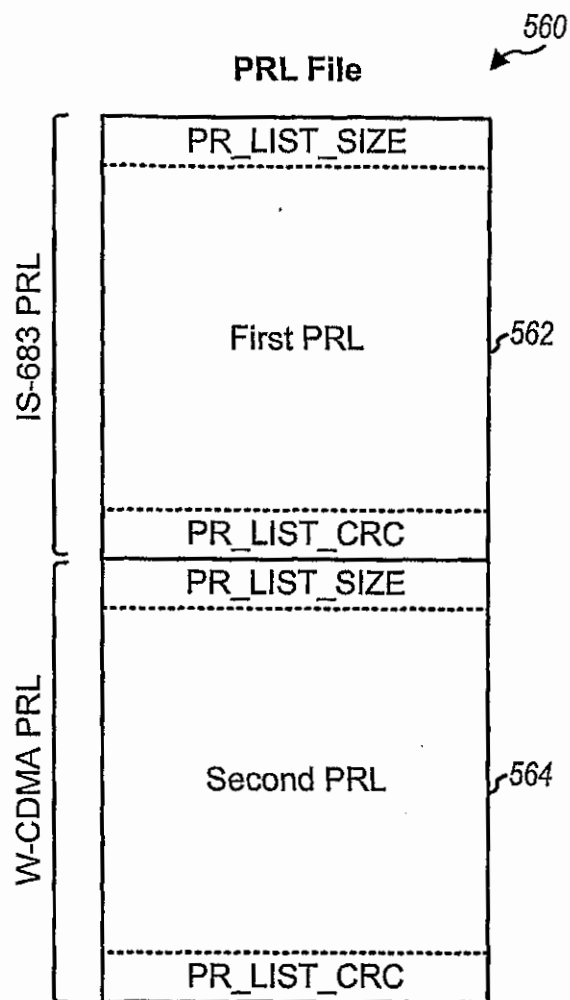


FIG. 5D

7/11

**FIG. 5E****FIG. 5F**

8/11


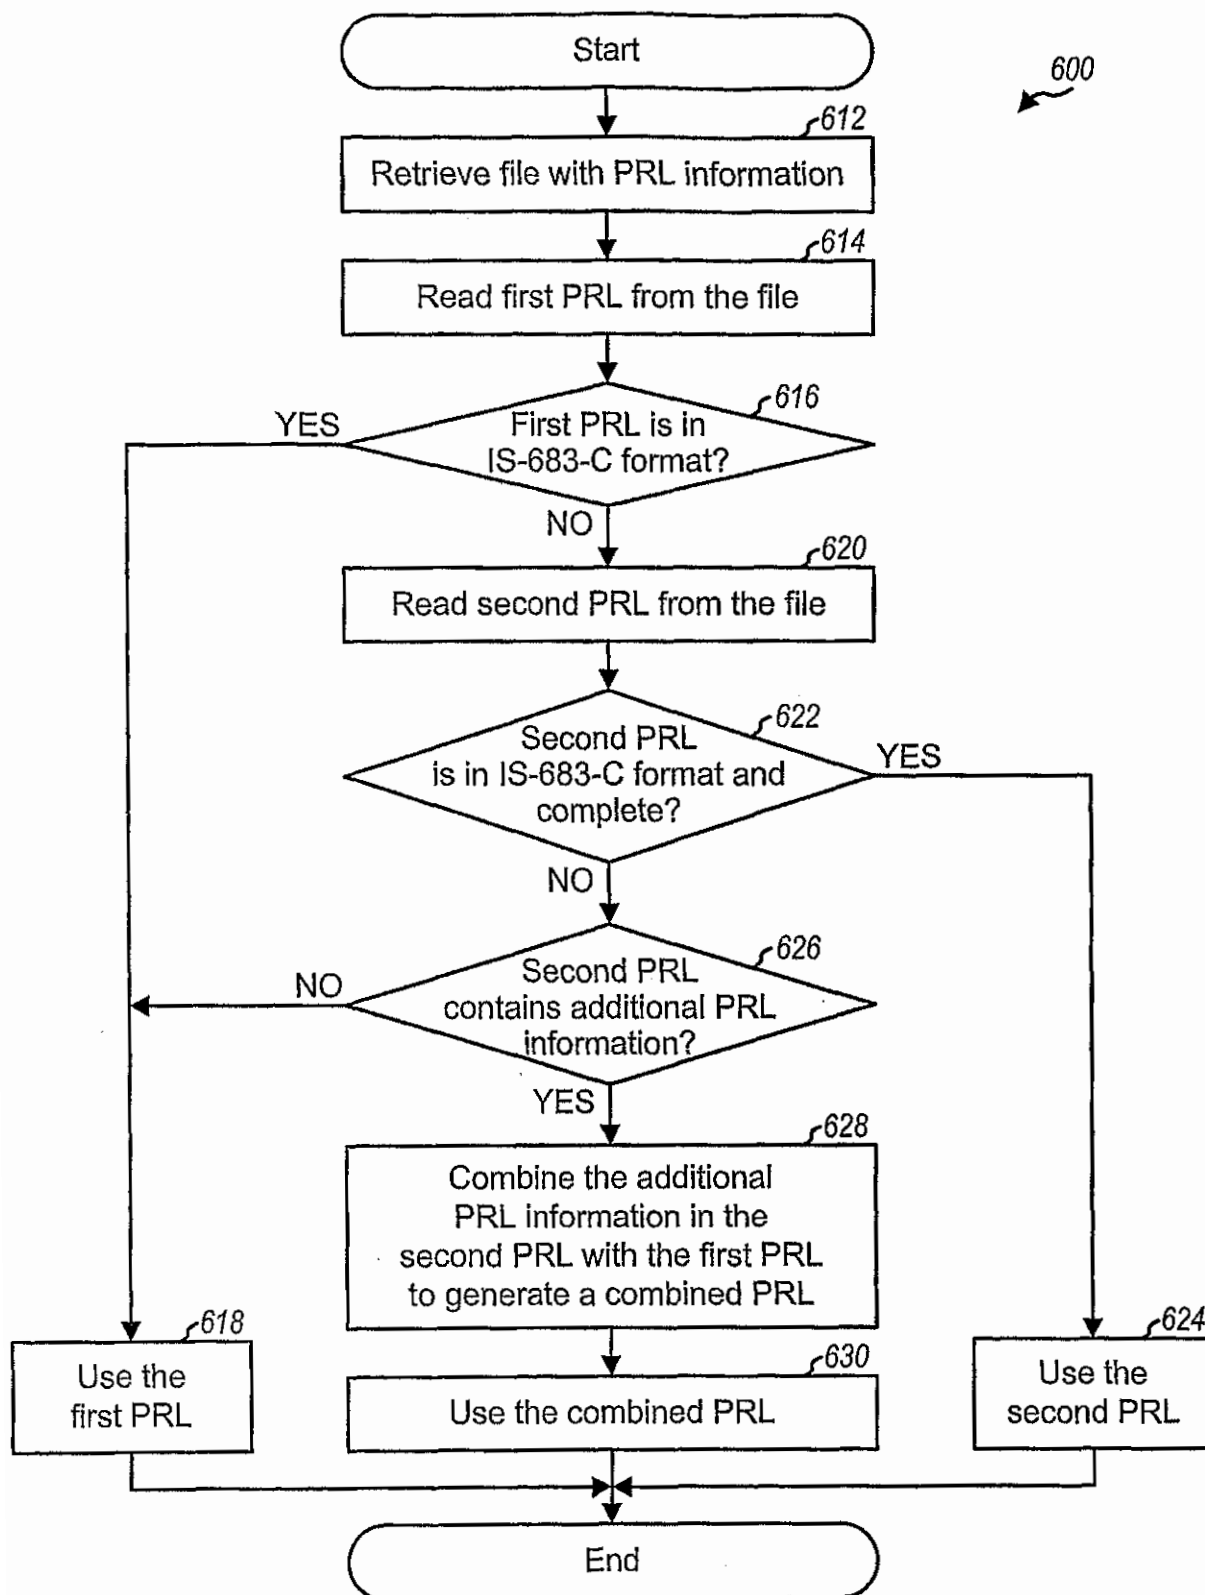


FIG. 6

9/11

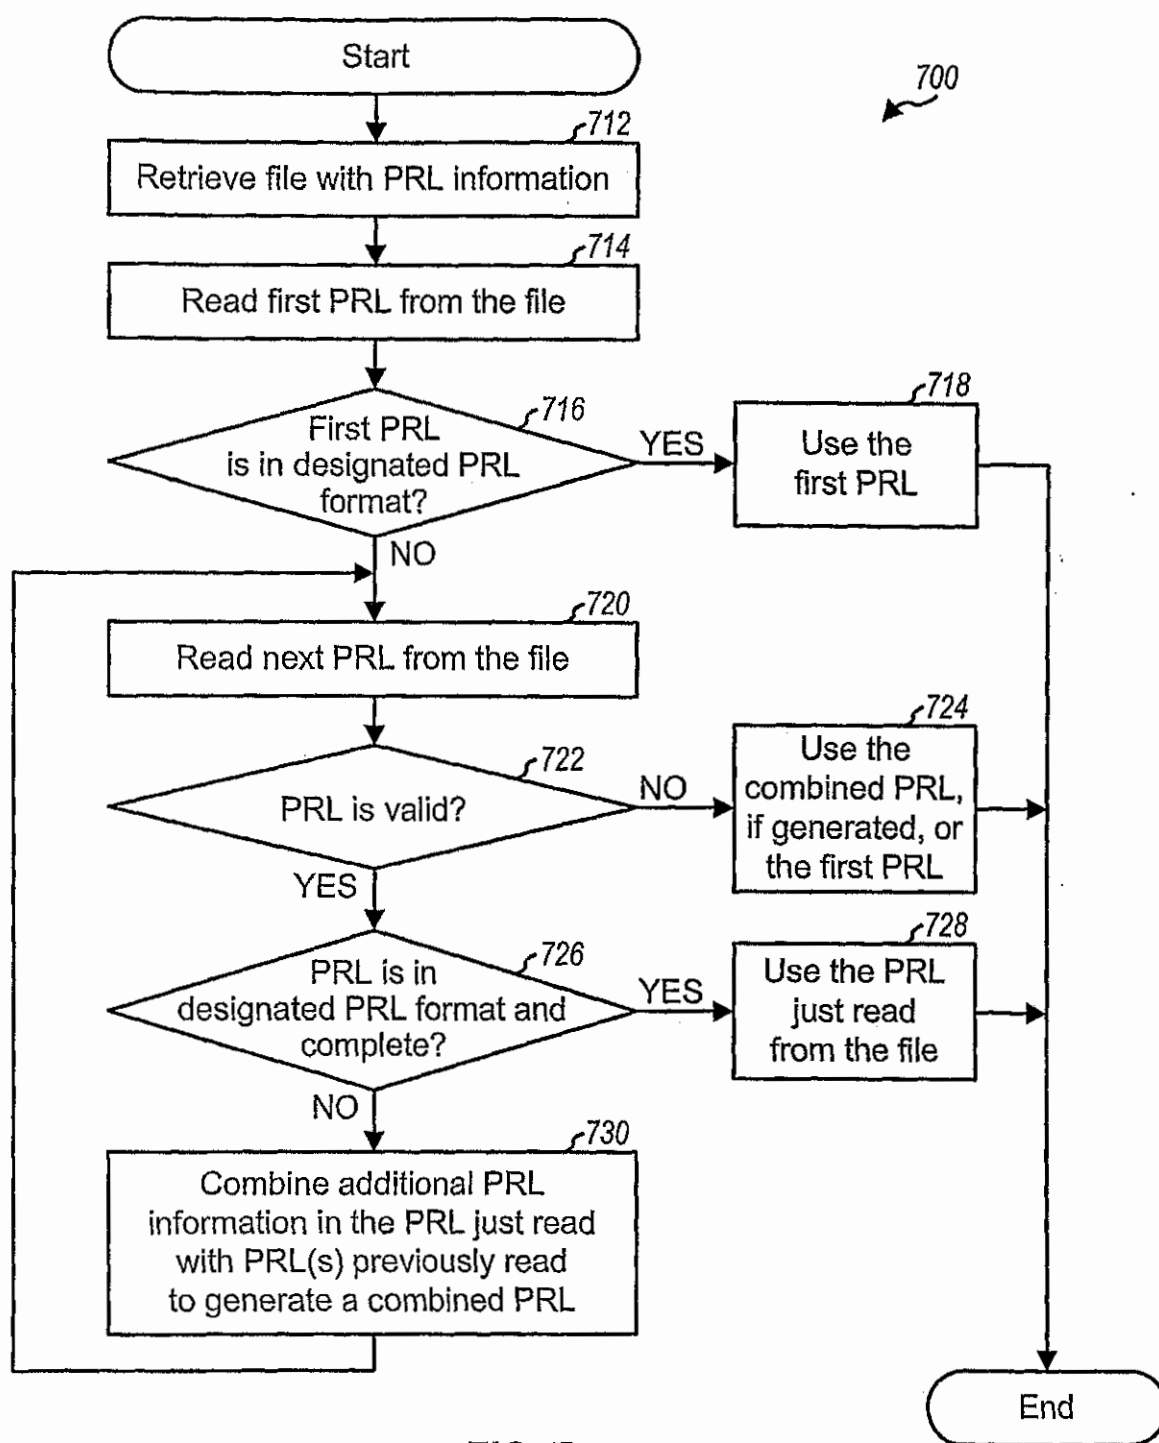

10/11

EF_{PRL}

800

Identifier: '6F30'		Structure: transparent		Mandatory	
File size: "PRL File Size"			Update activity: low		
Access Conditions:					
READ		CHV			
UPDATE		ADM			
INVALIDATE		ADM			
REHABILITATE		ADM			
Bytes	Description			M/O	Length
1 - PRL File Size	PR_LIST			O	PRL File Size

FIG. 8

Data Block

900

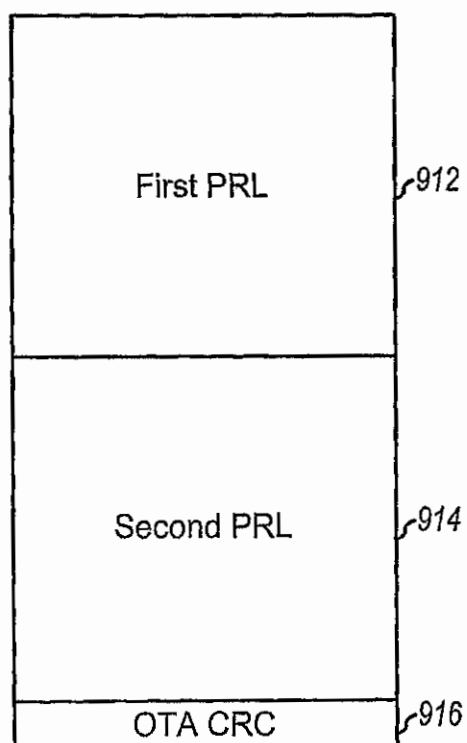


FIG. 9

11/11

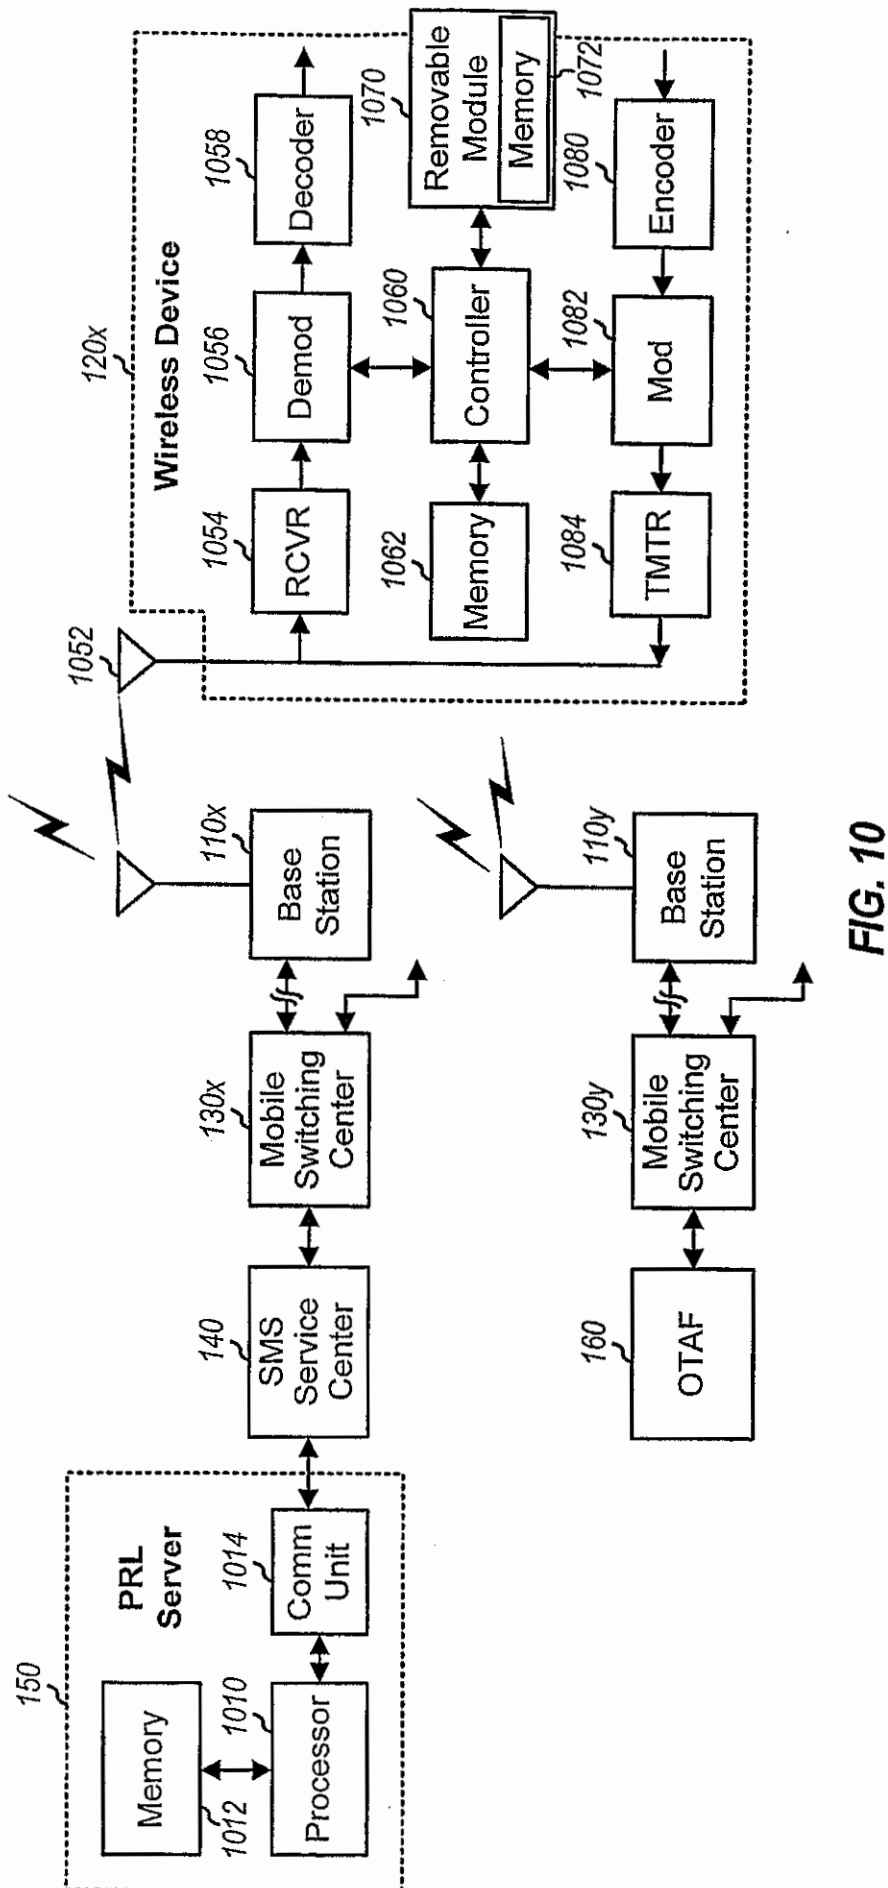


FIG. 10