

FIG. 1

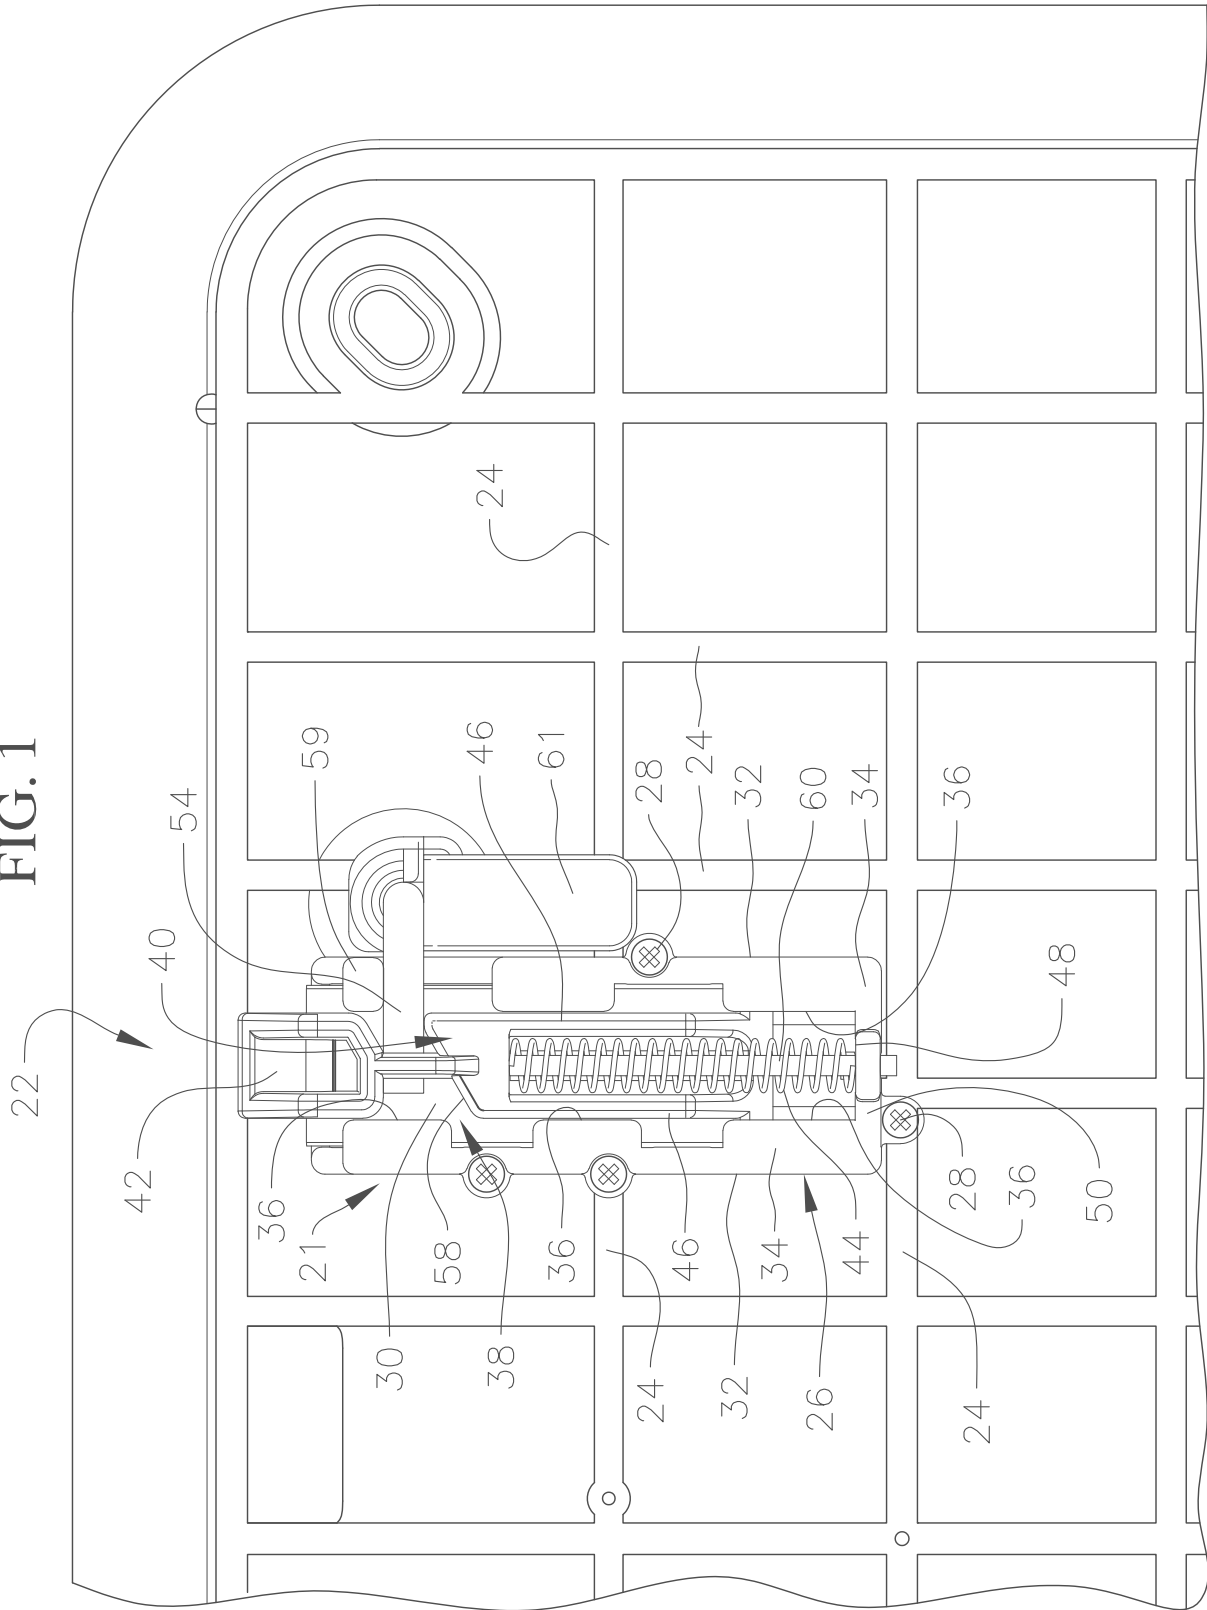
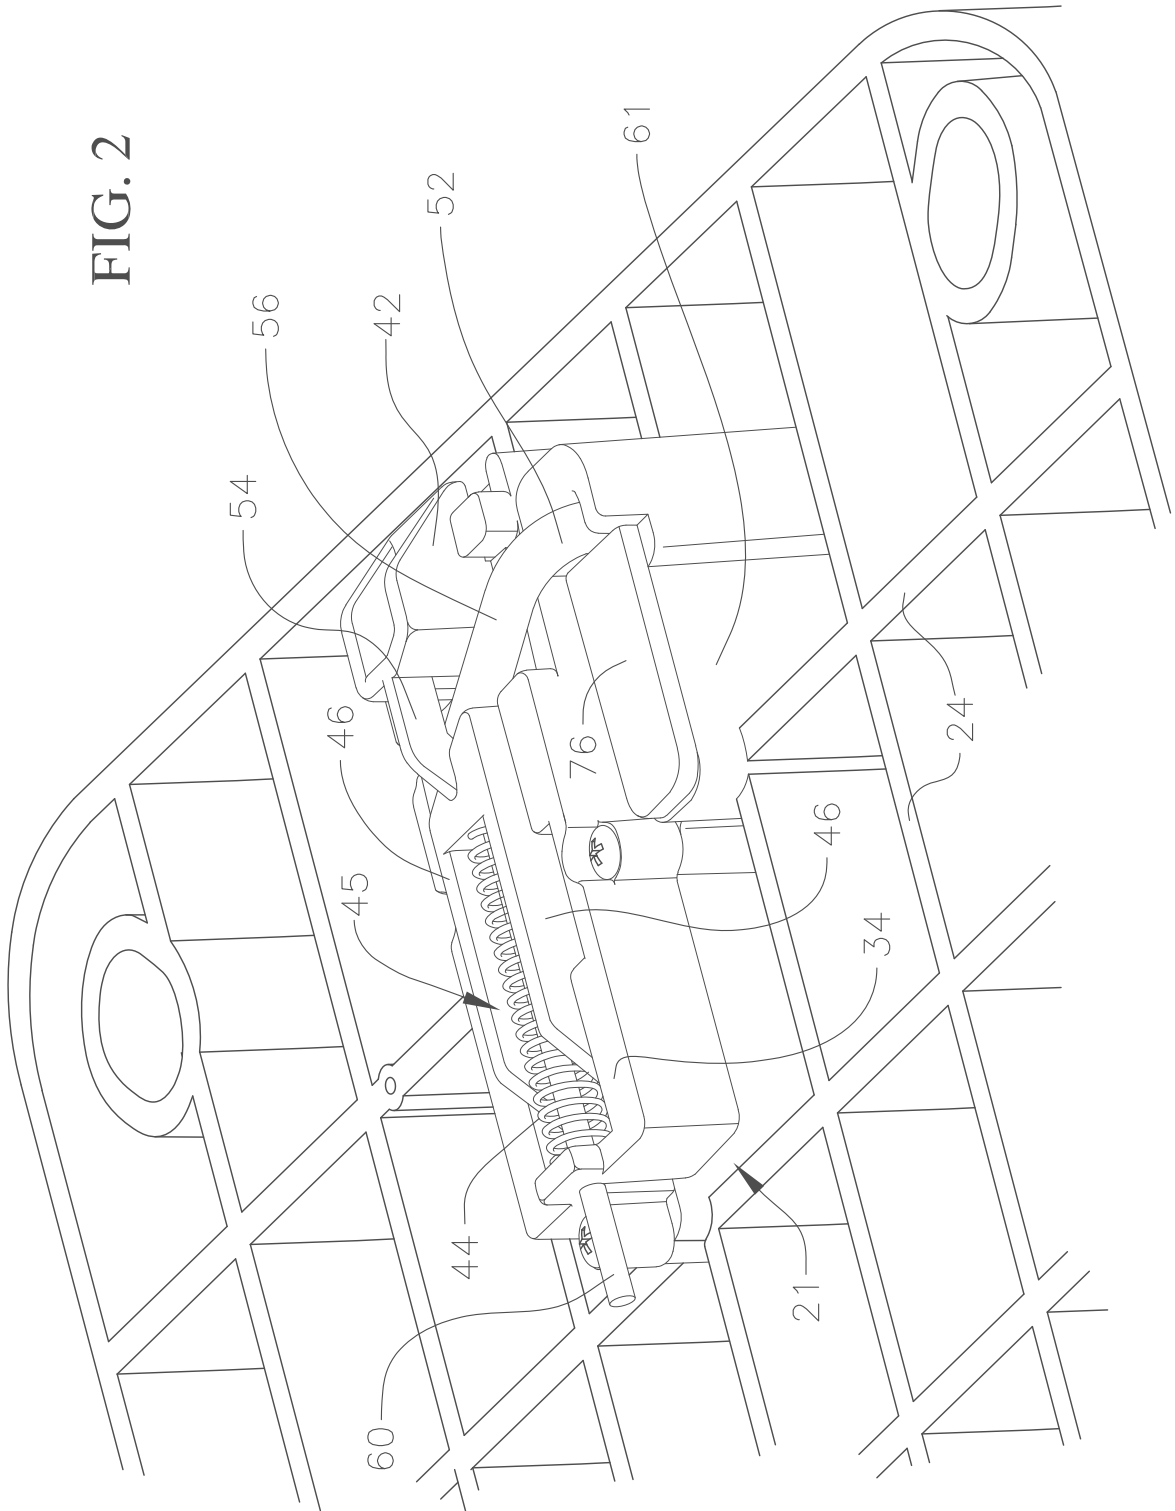


FIG. 2



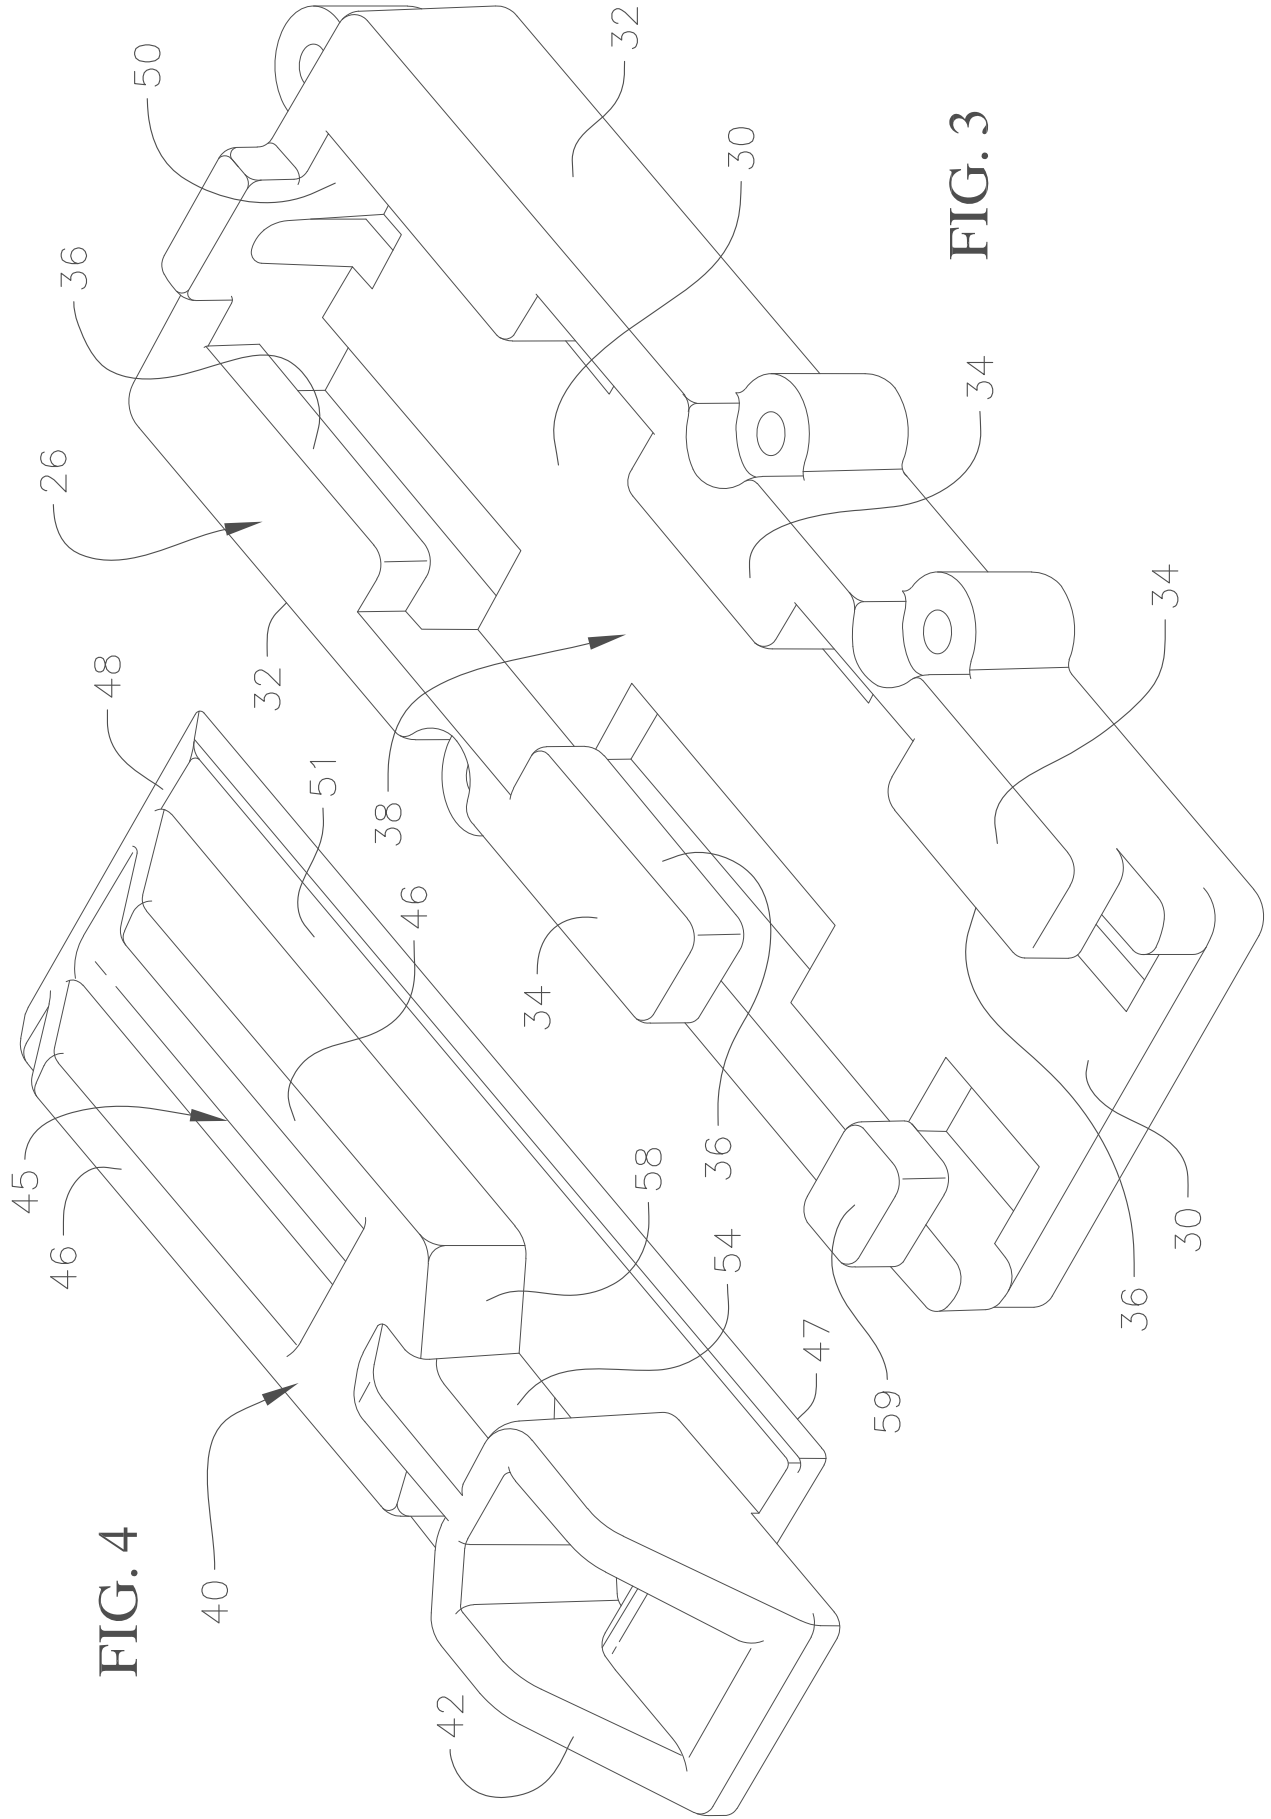


FIG. 5

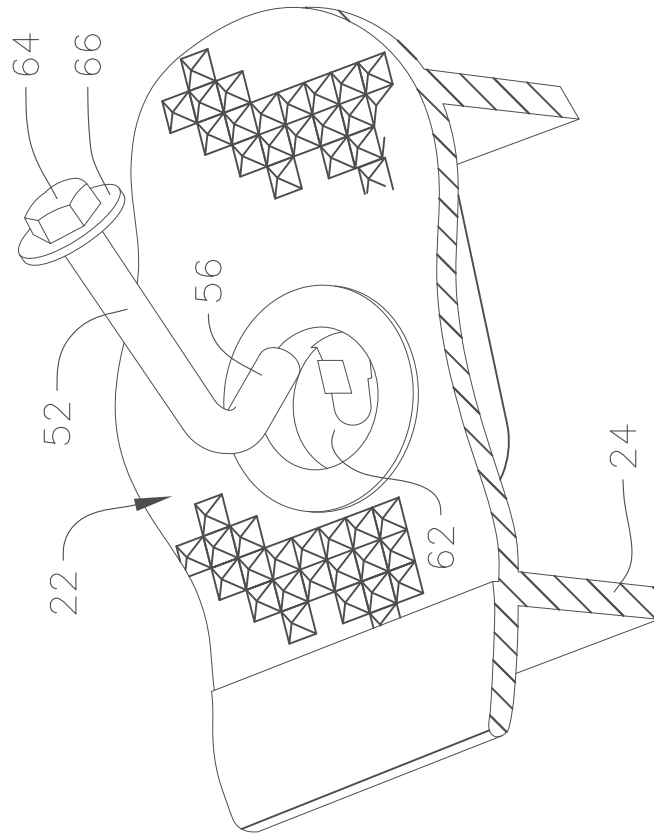


FIG. 6

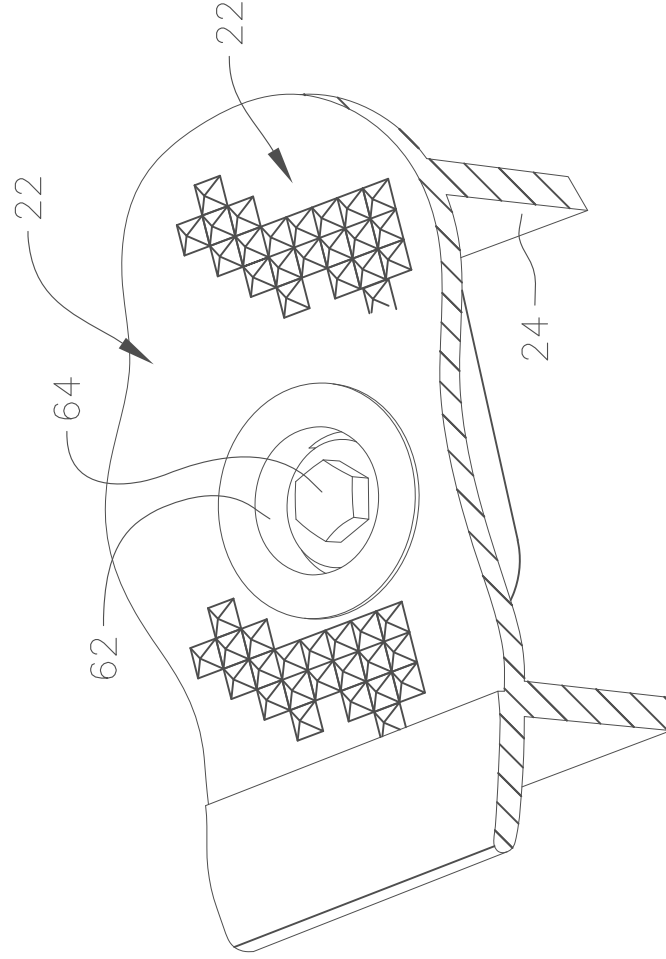


FIG. 7

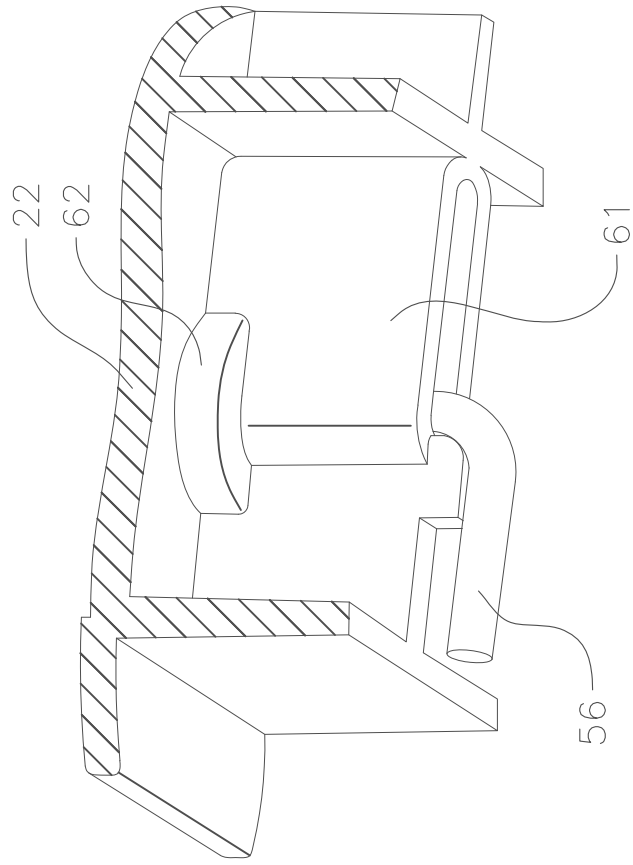


FIG. 8

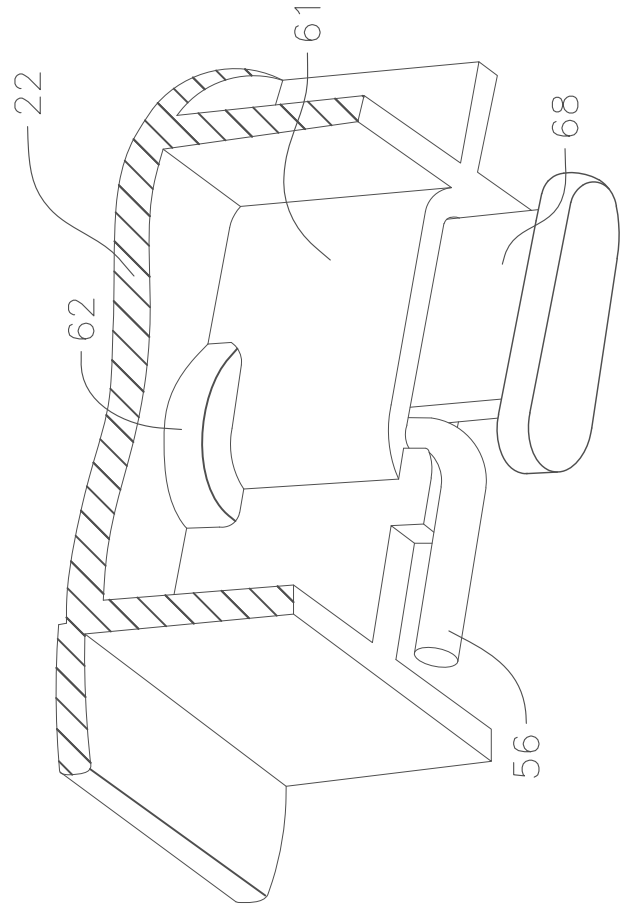


FIG. 9

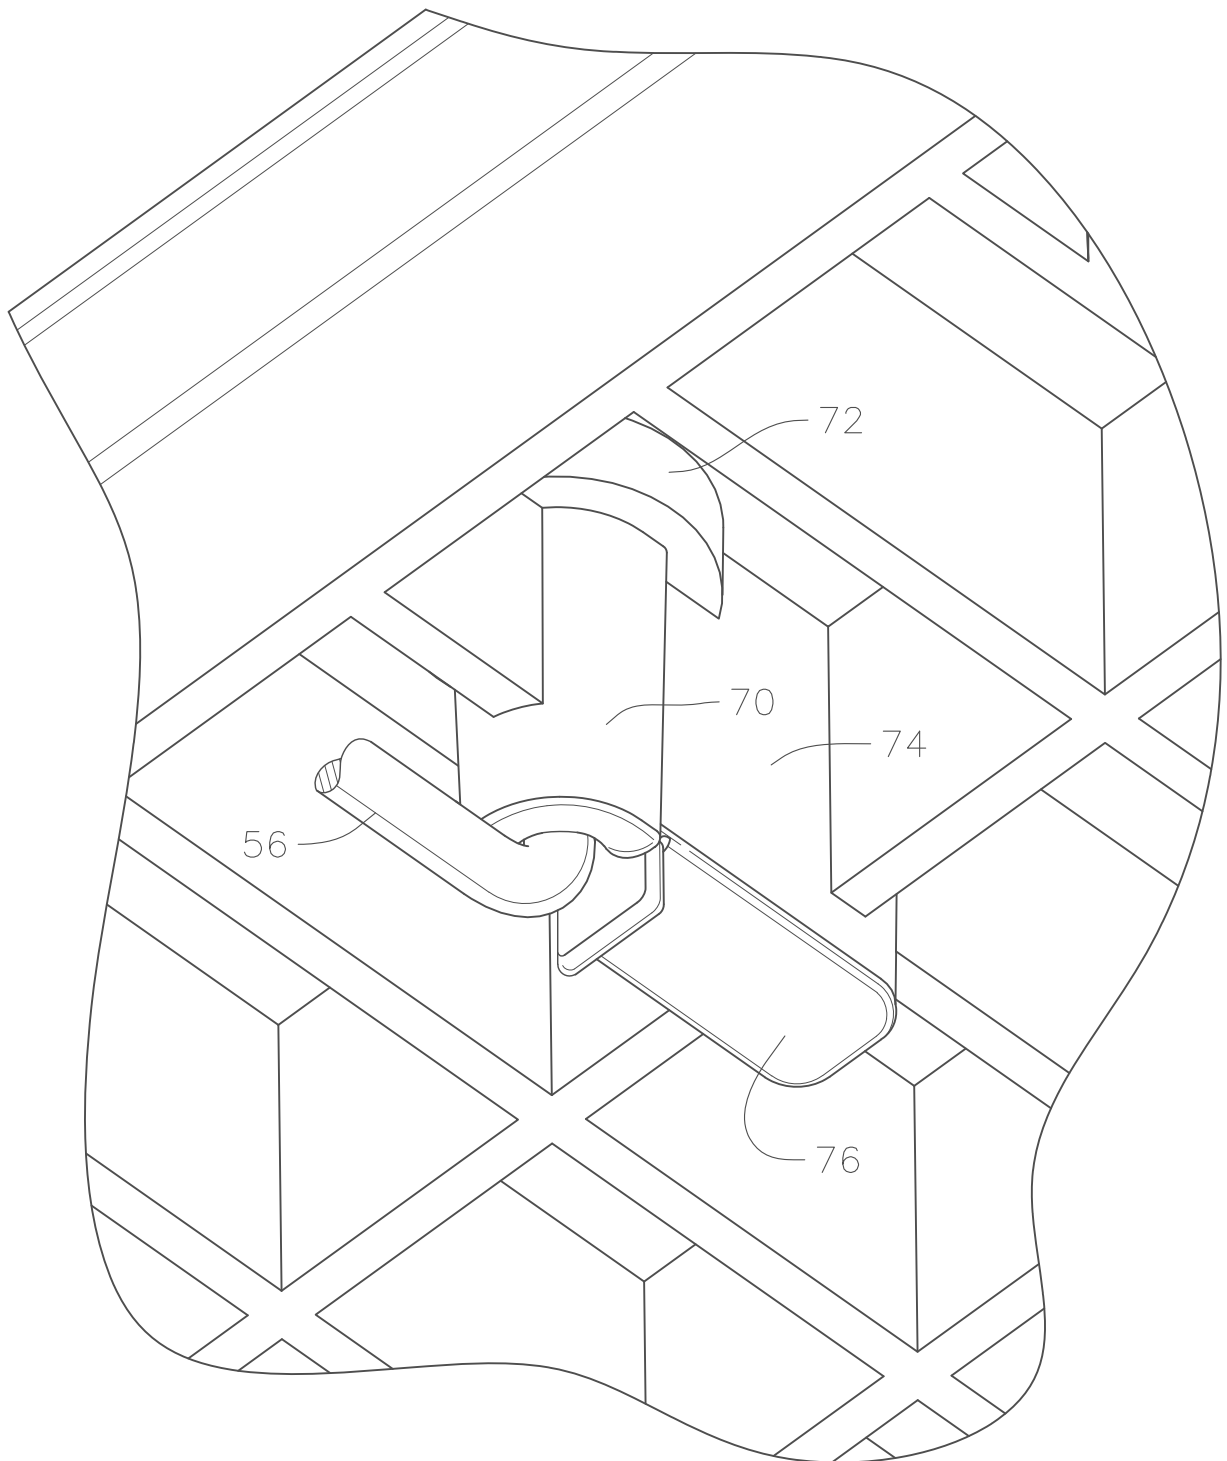


FIG. 10

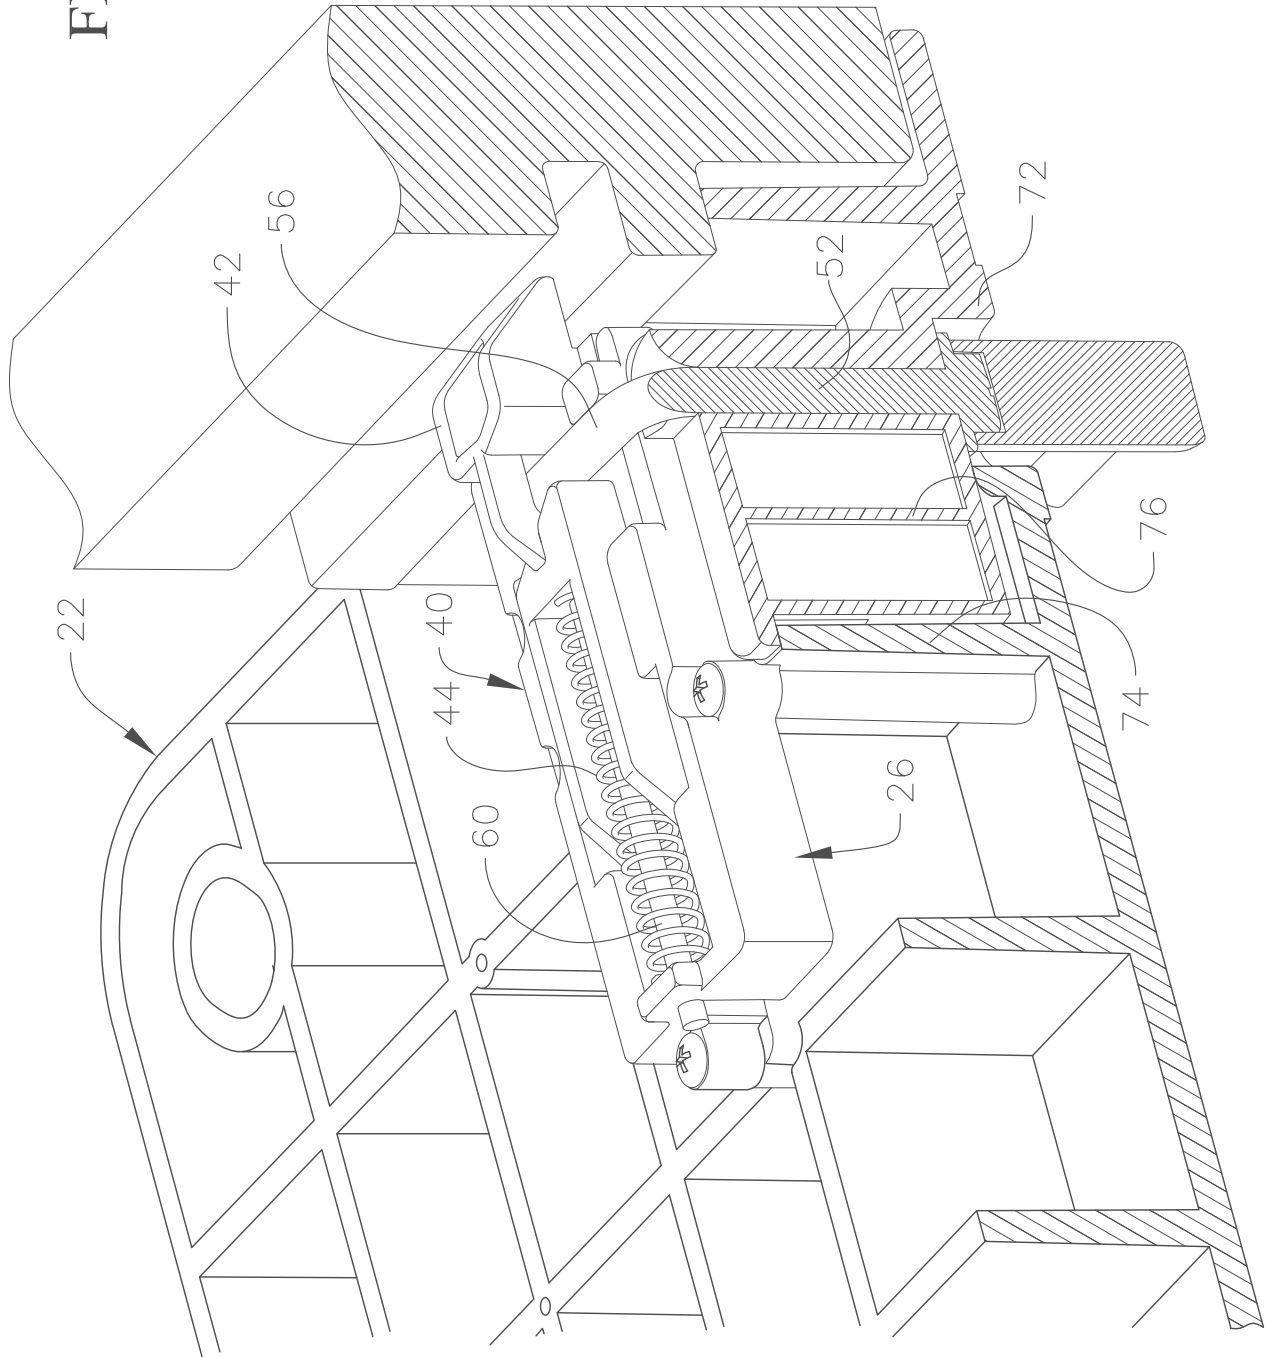


FIG. 12

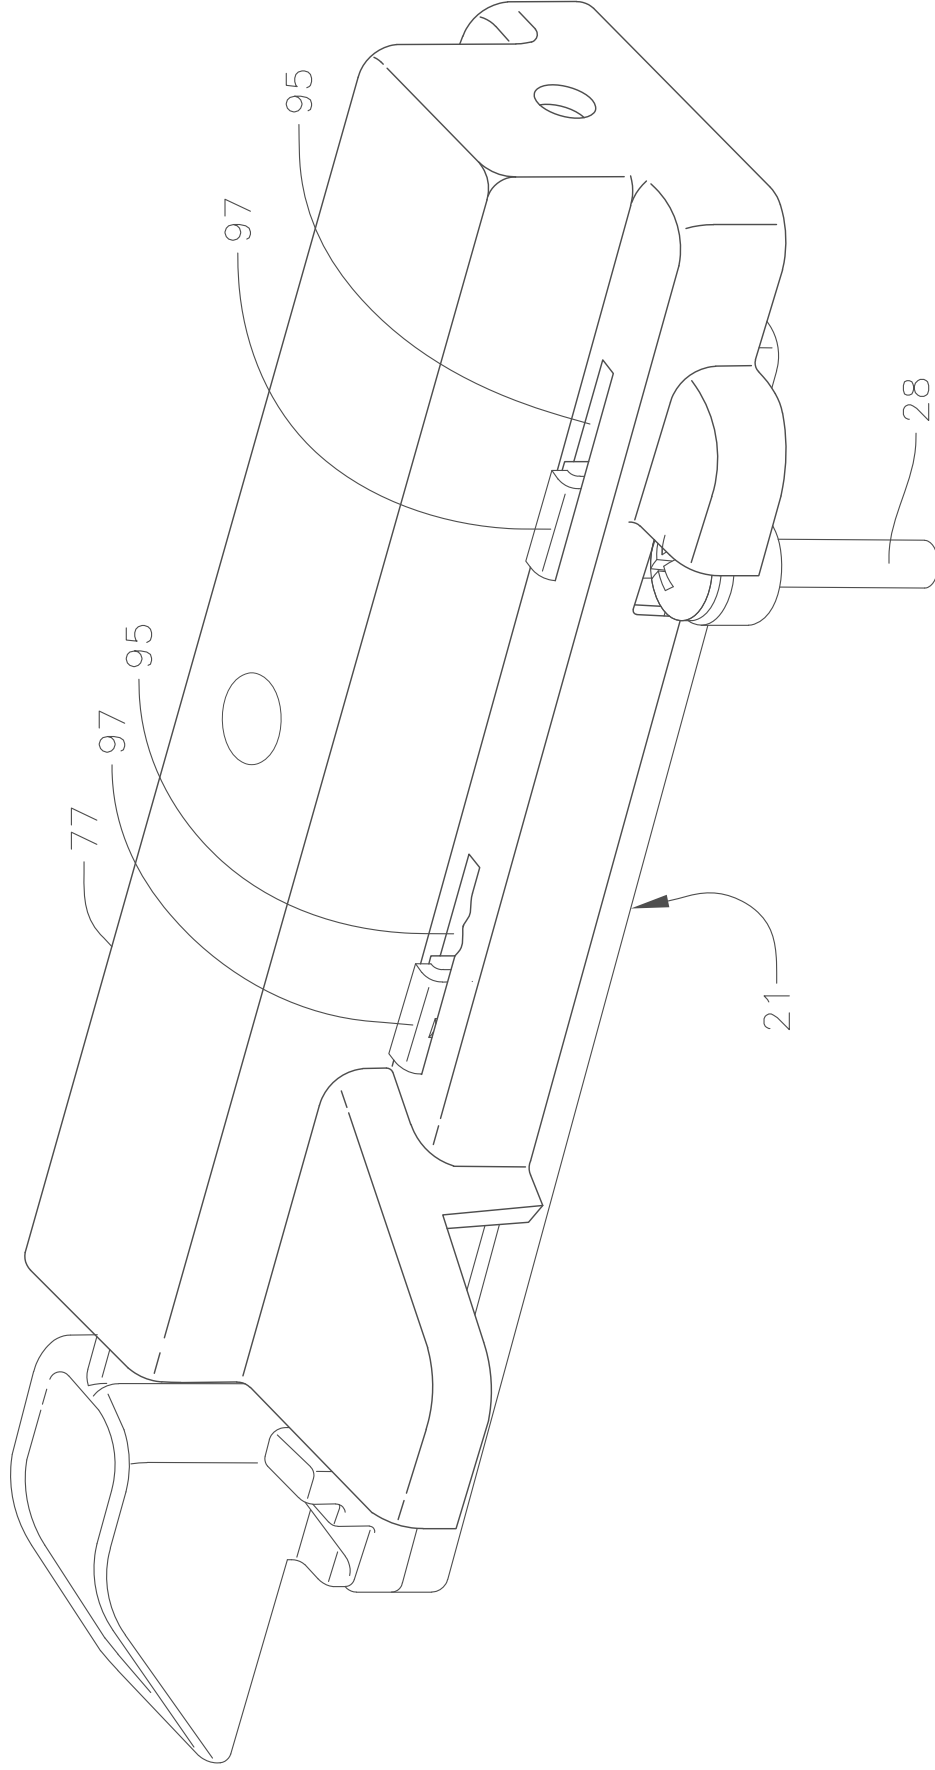


FIG. 13

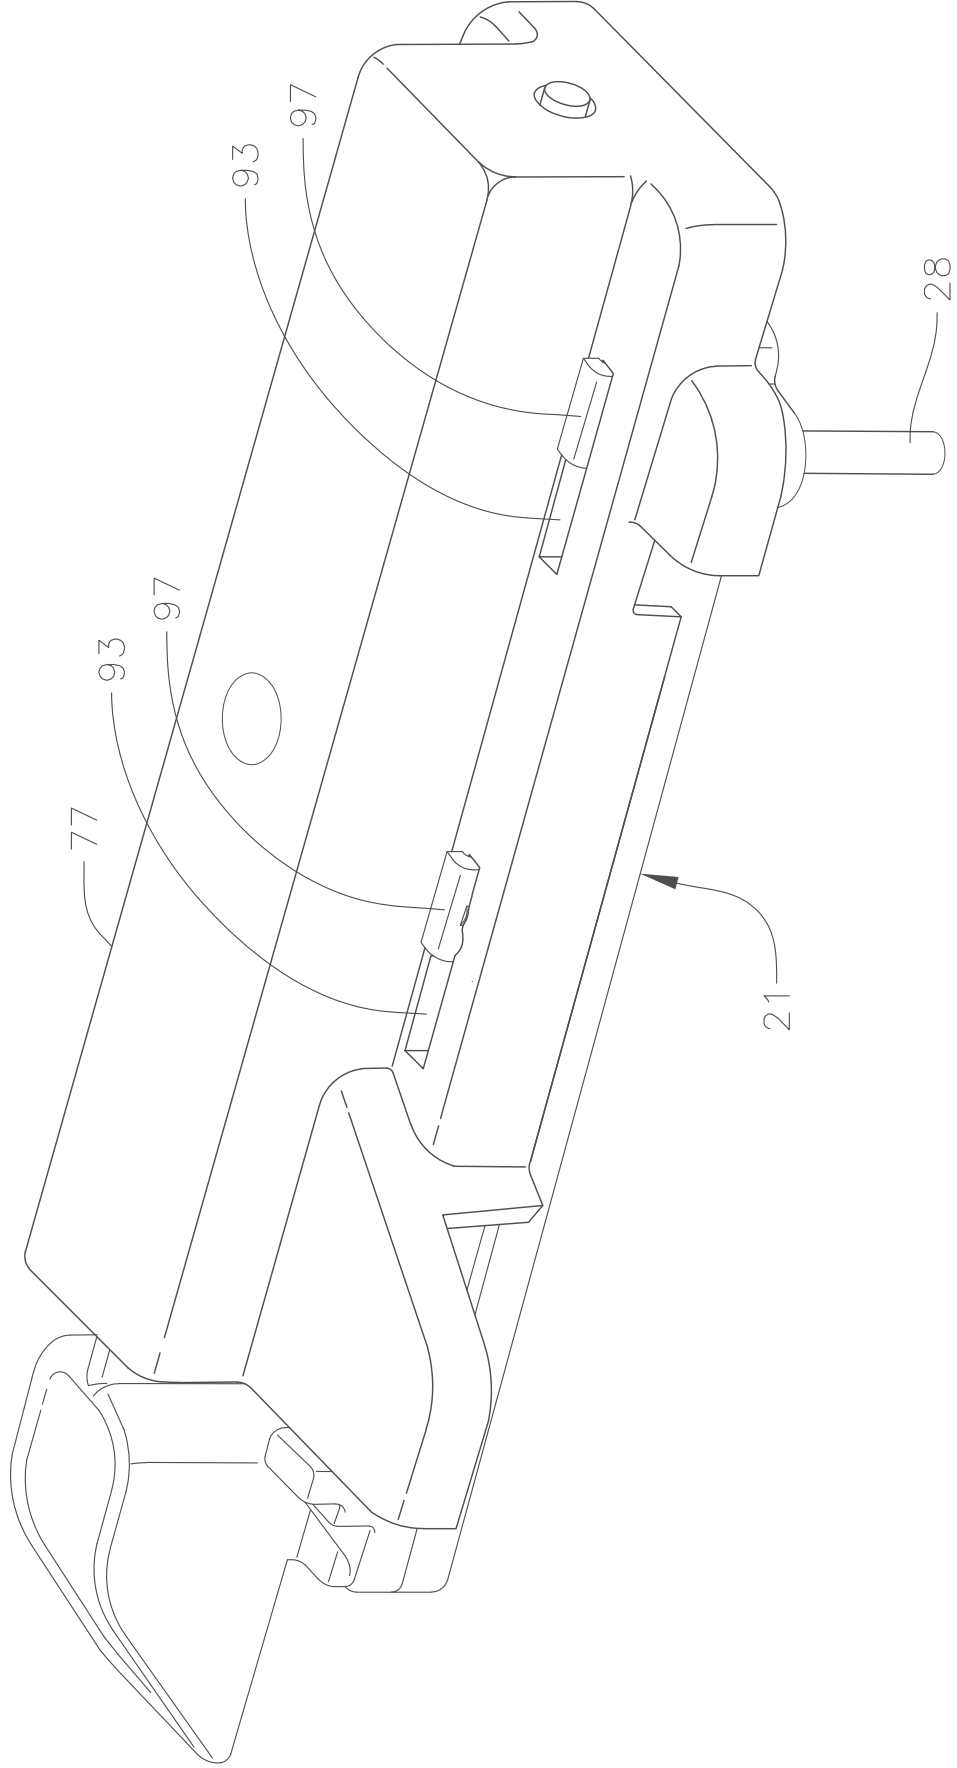


FIG. 14

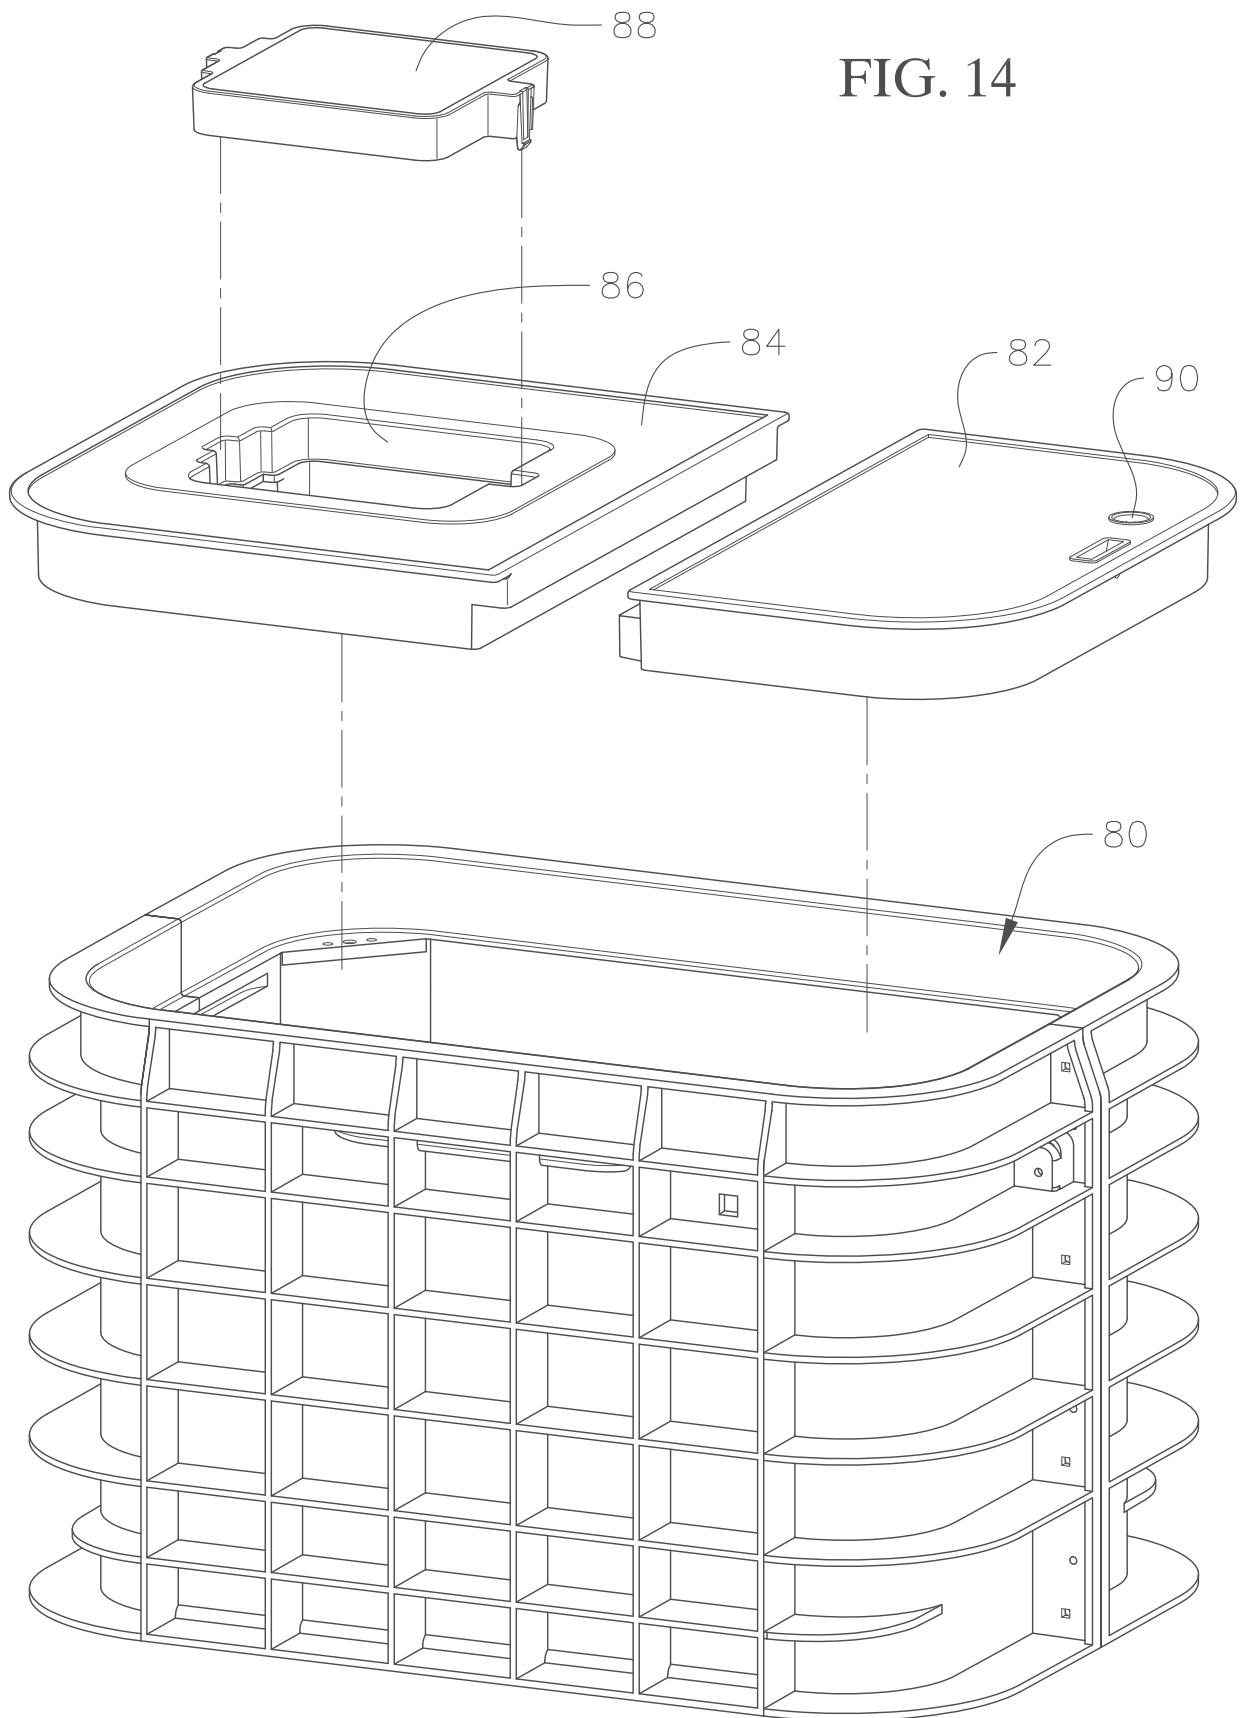


FIG. 15

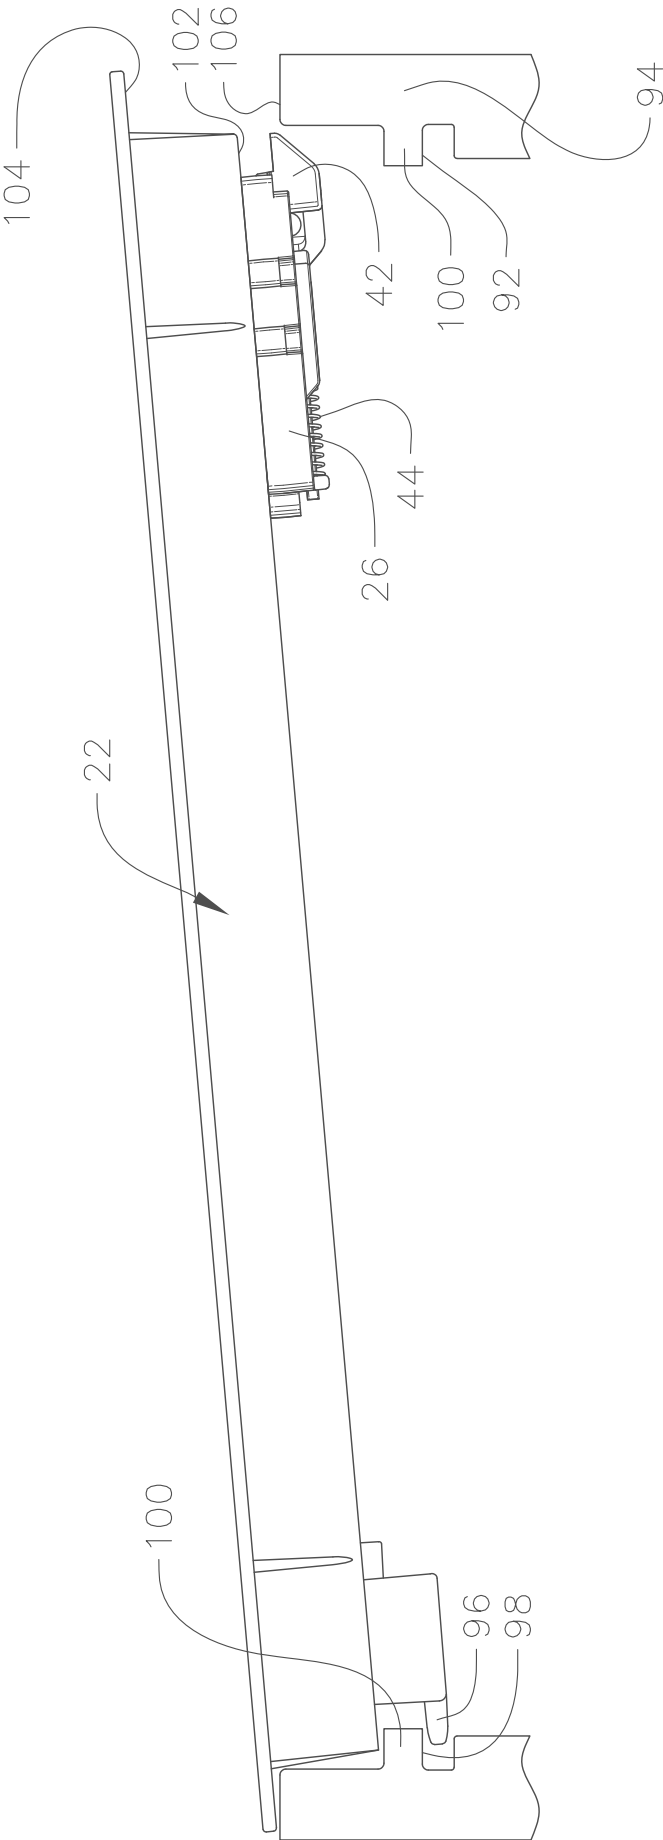


FIG. 16

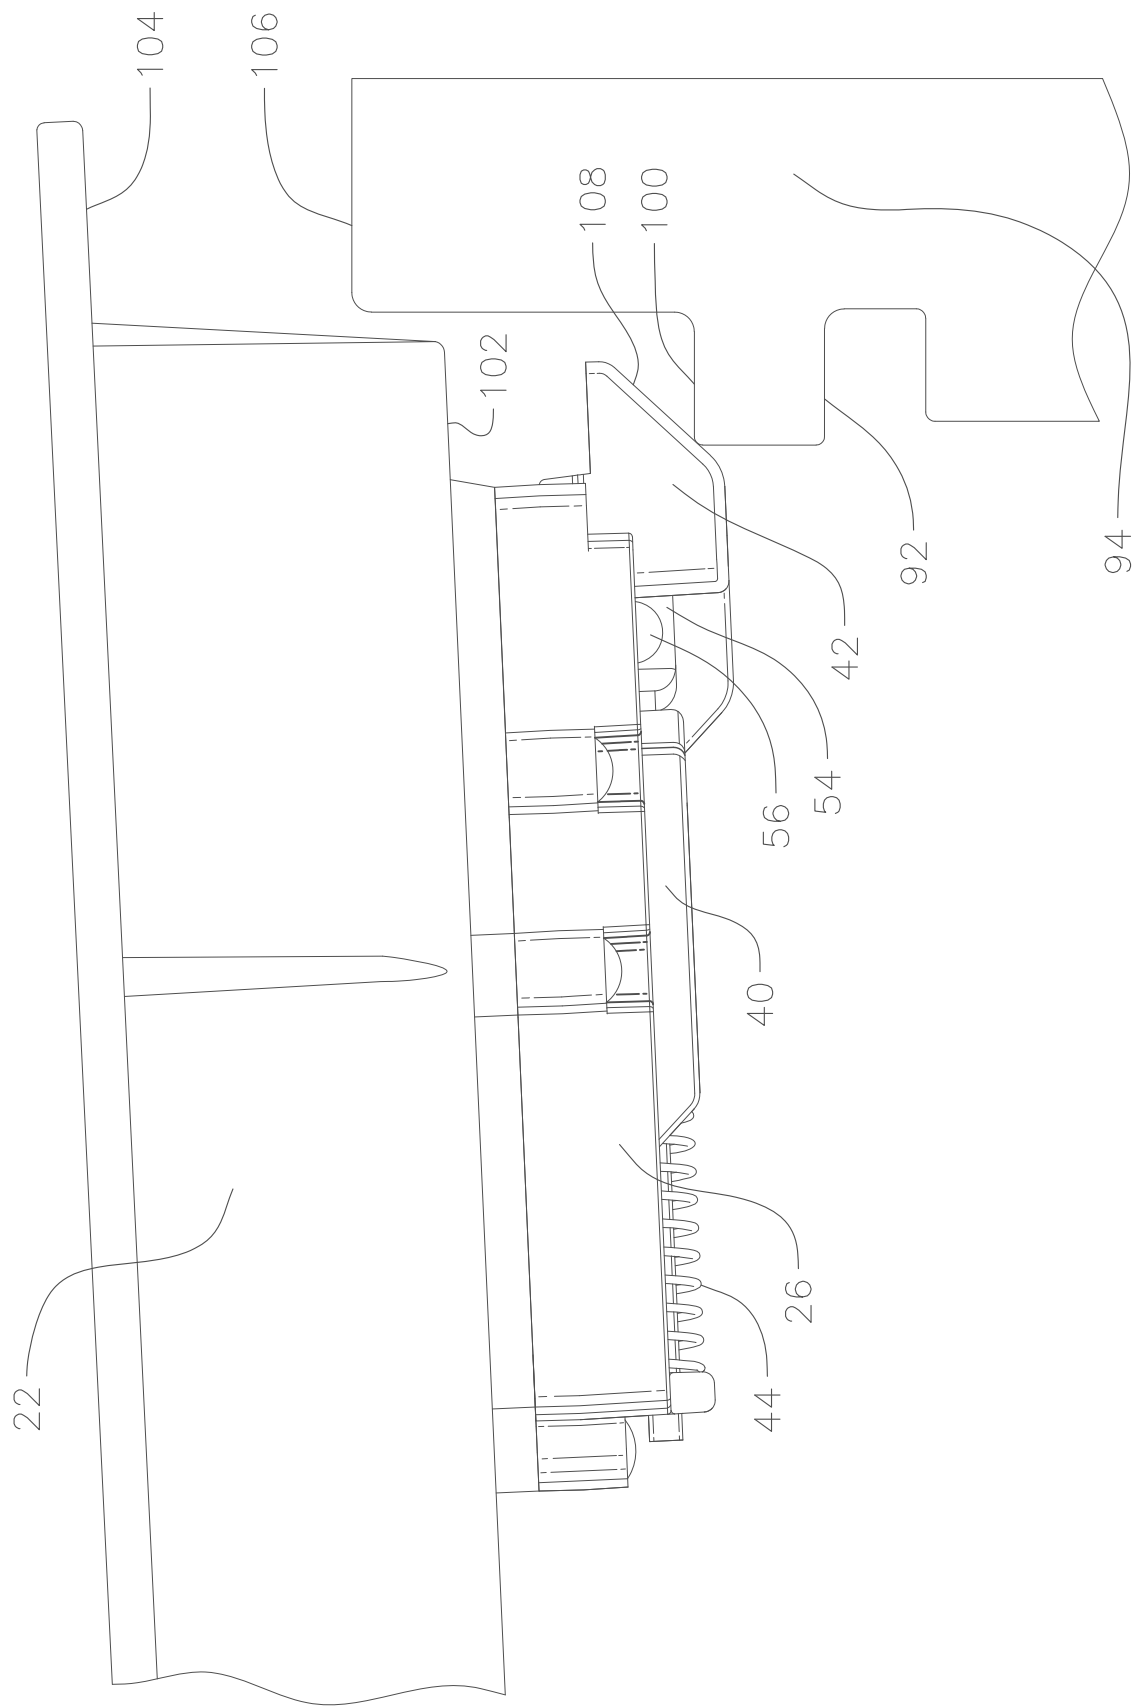


FIG. 17



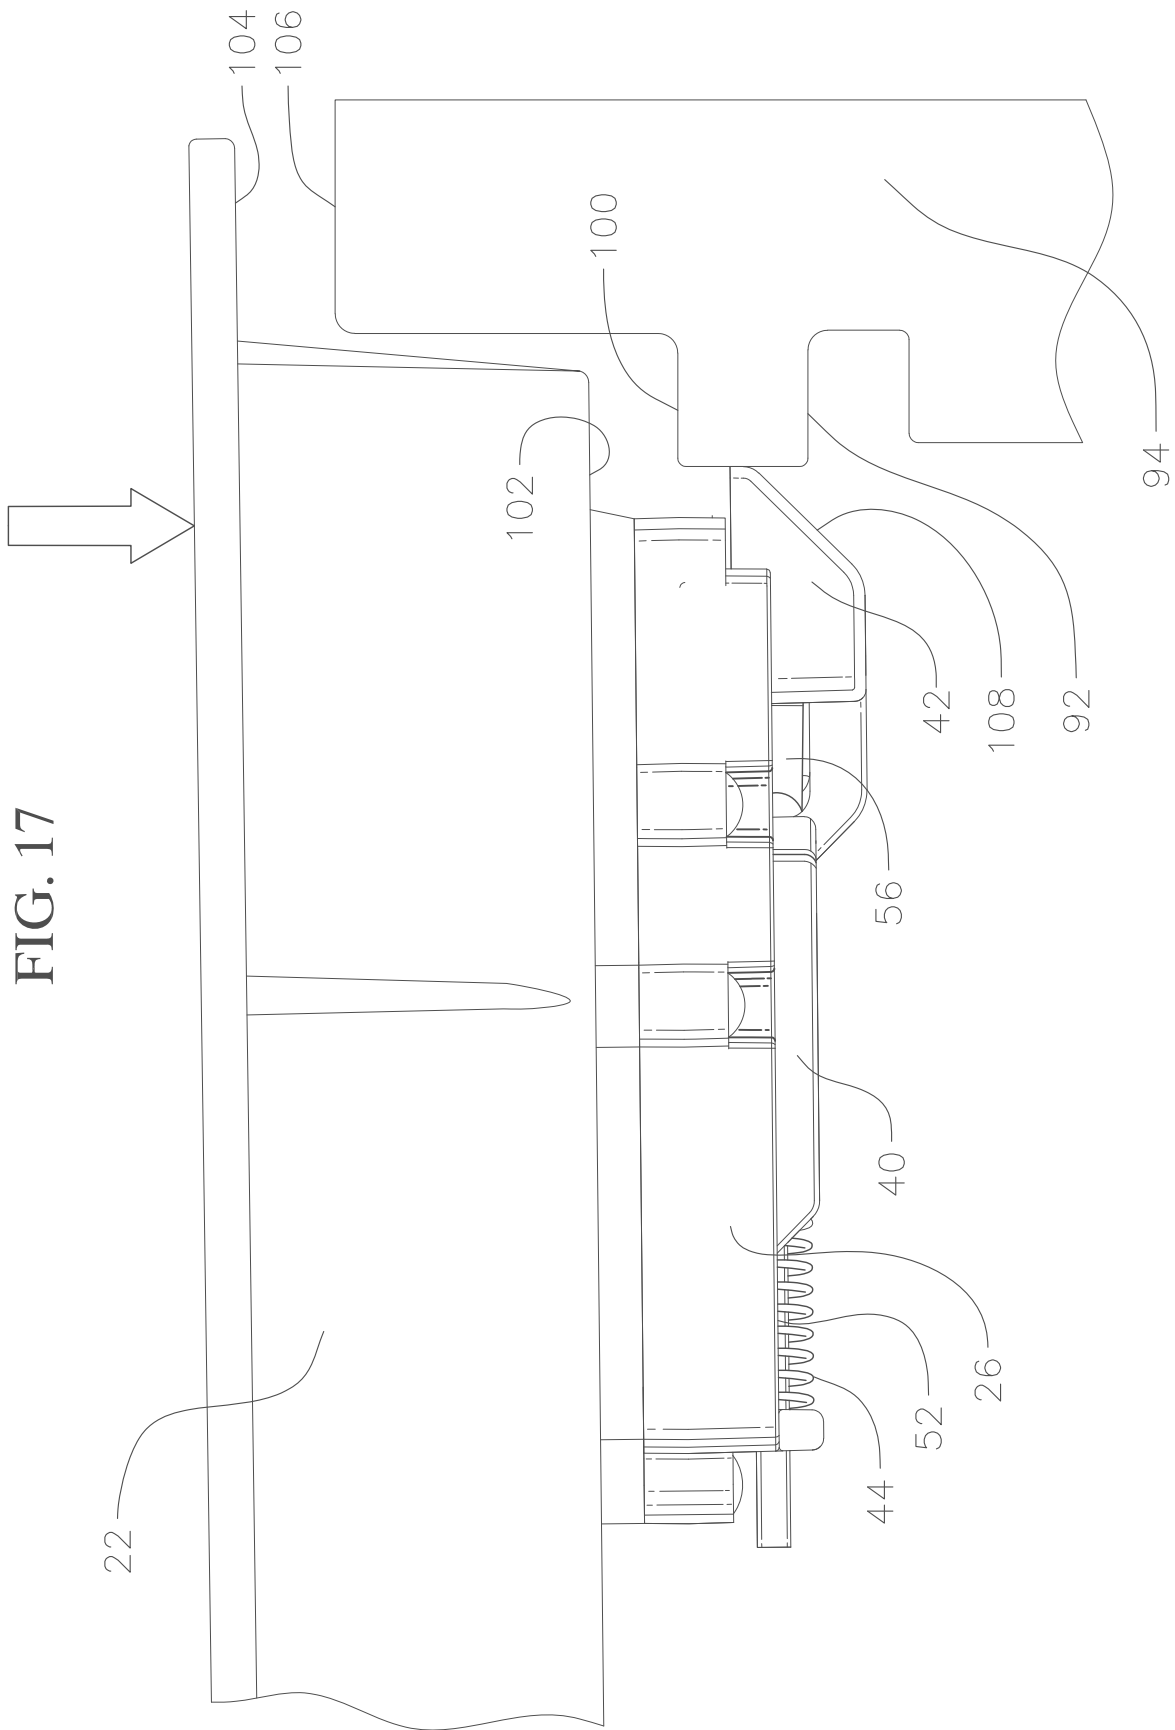



FIG. 18

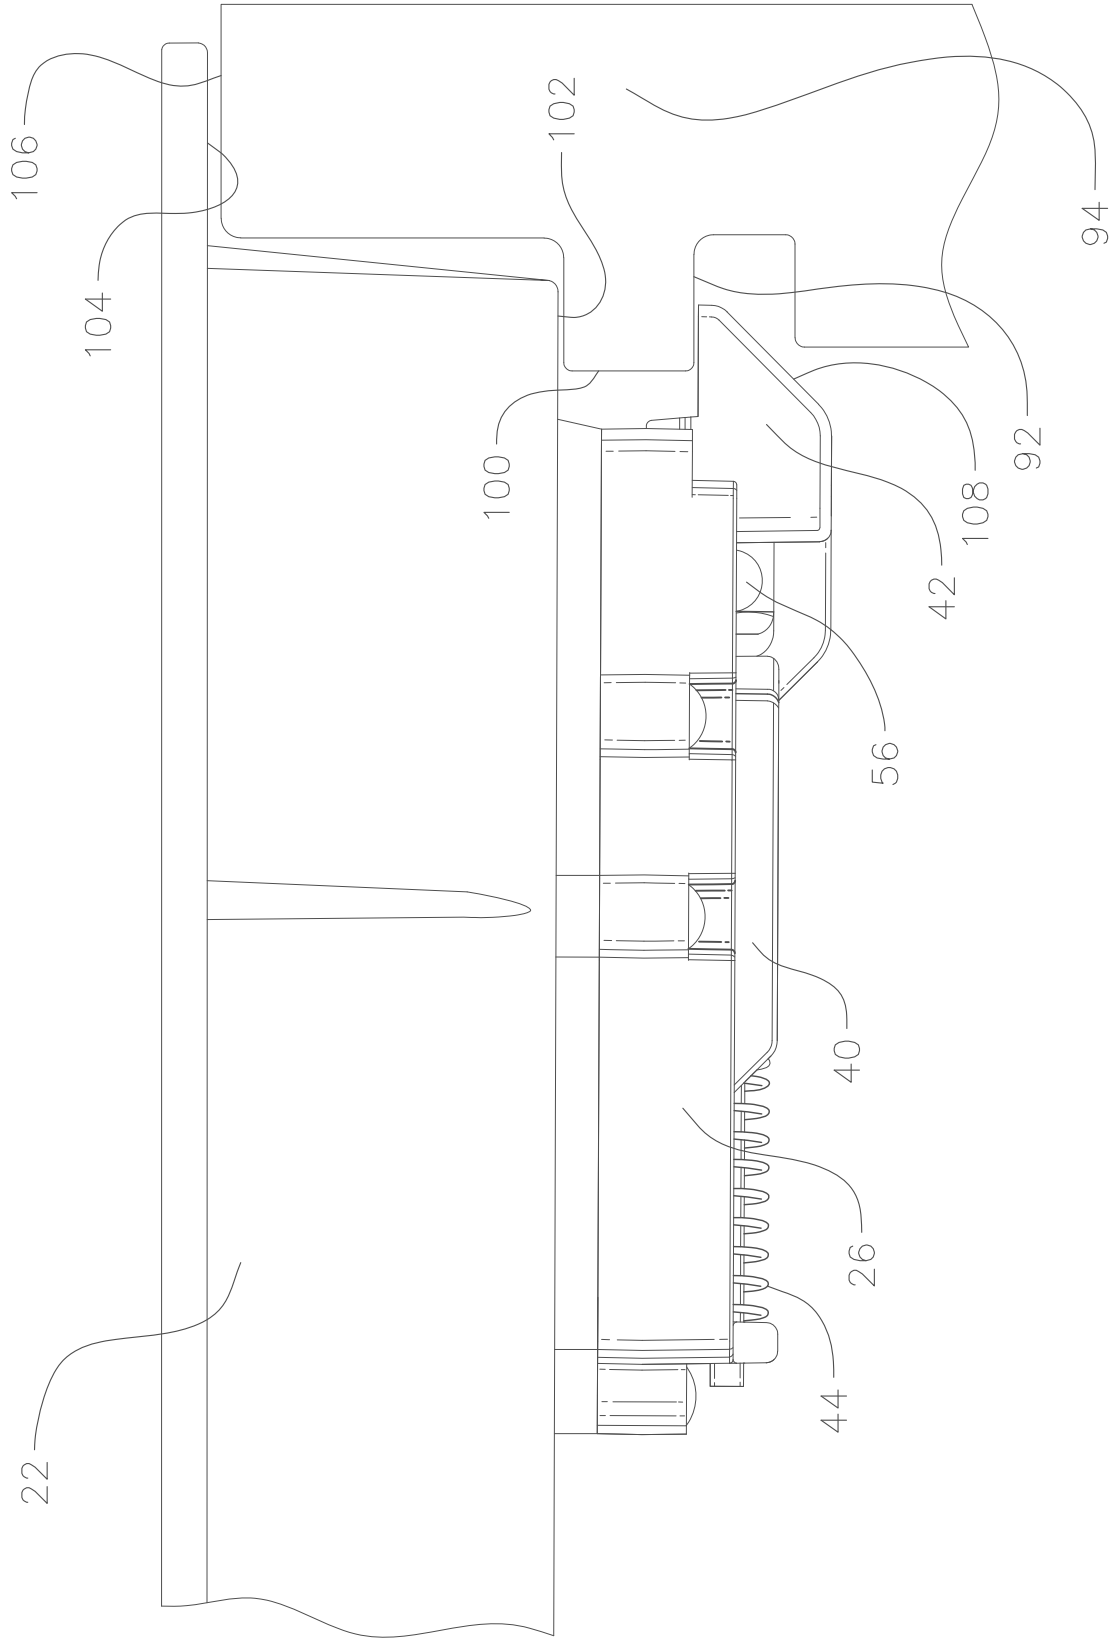

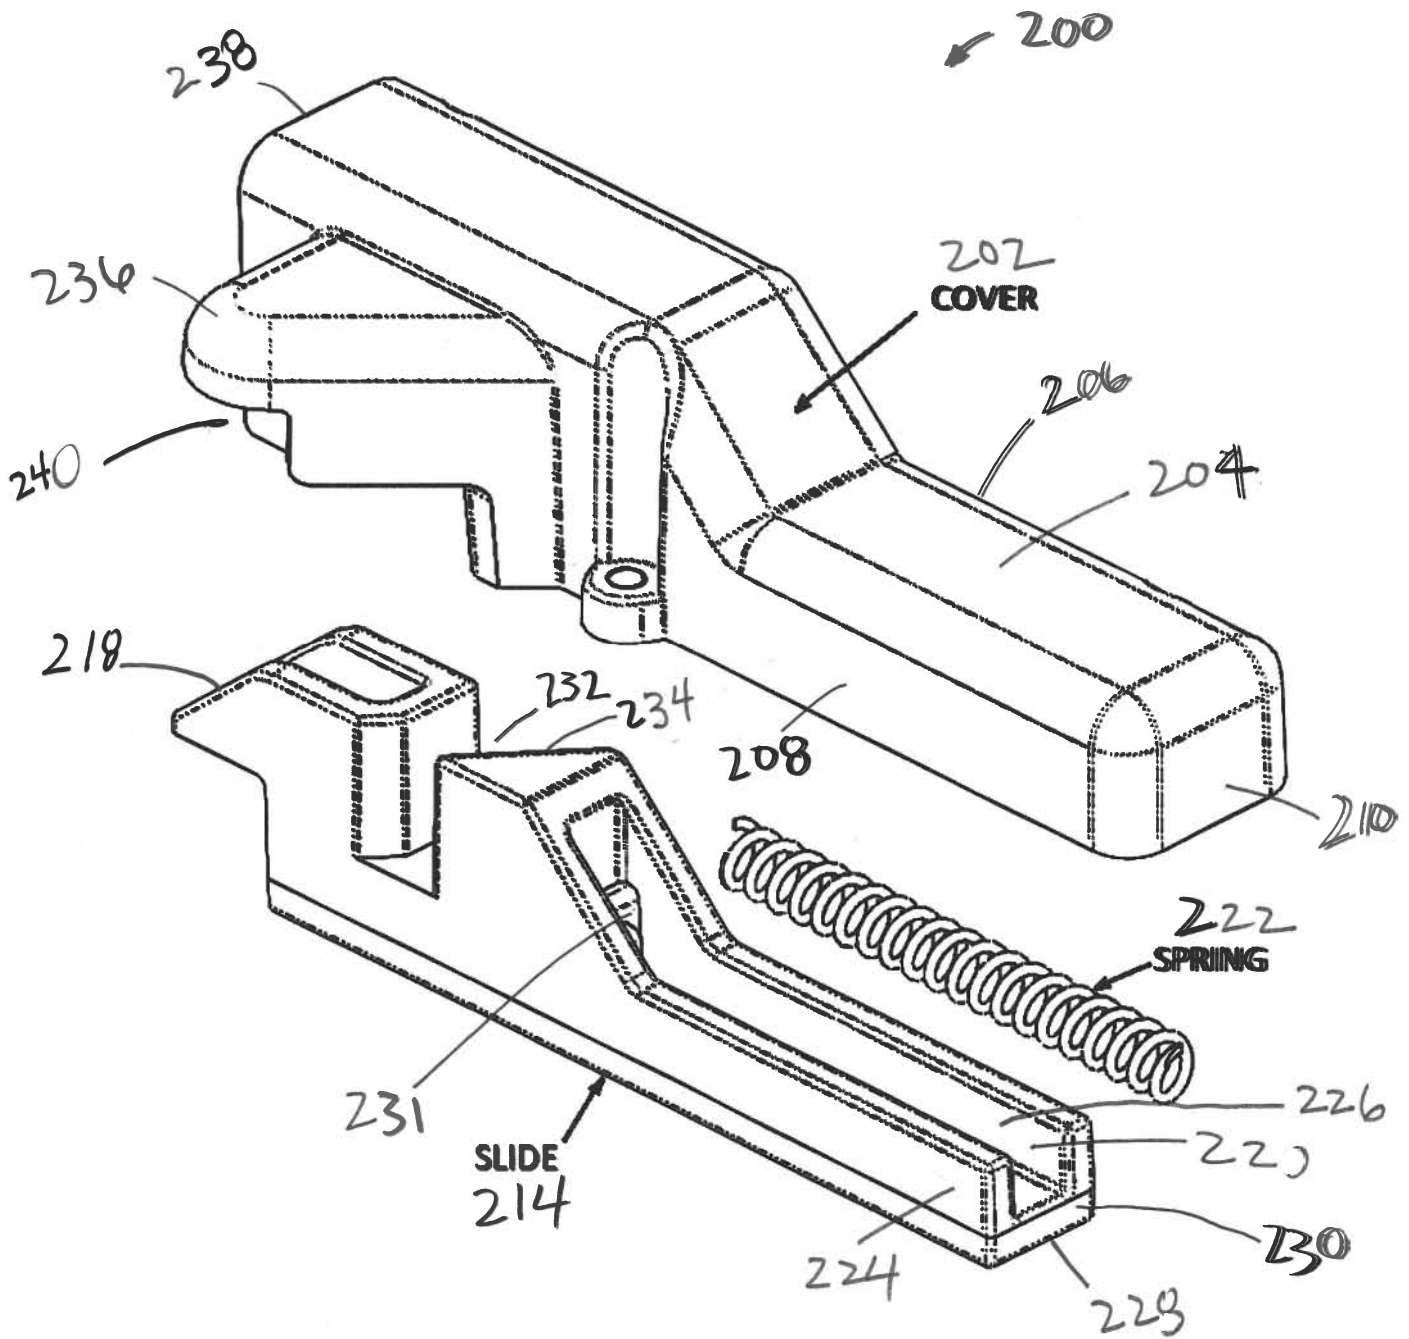


SLAM LATCH COMPONENTS

FIG. 20

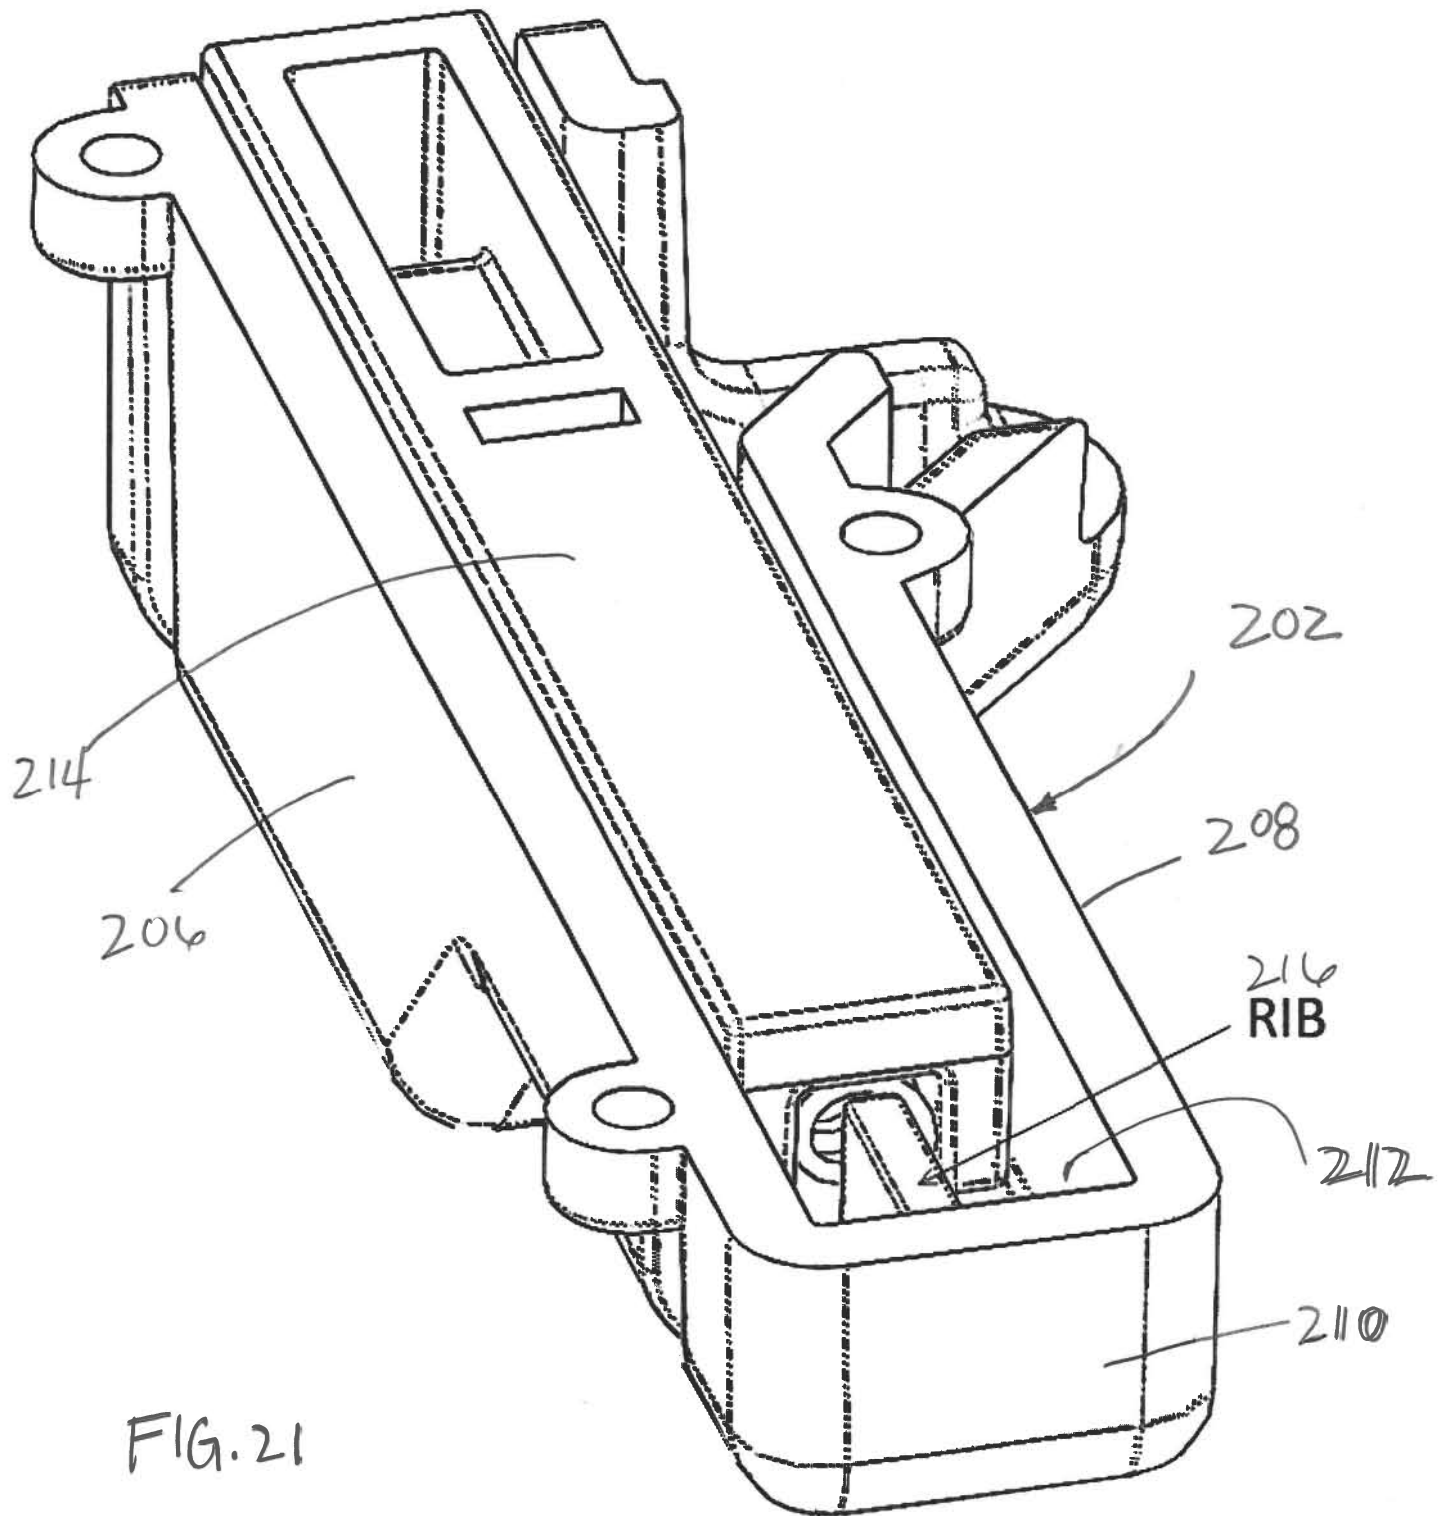


RIB IN COVER RETAINS SPRING

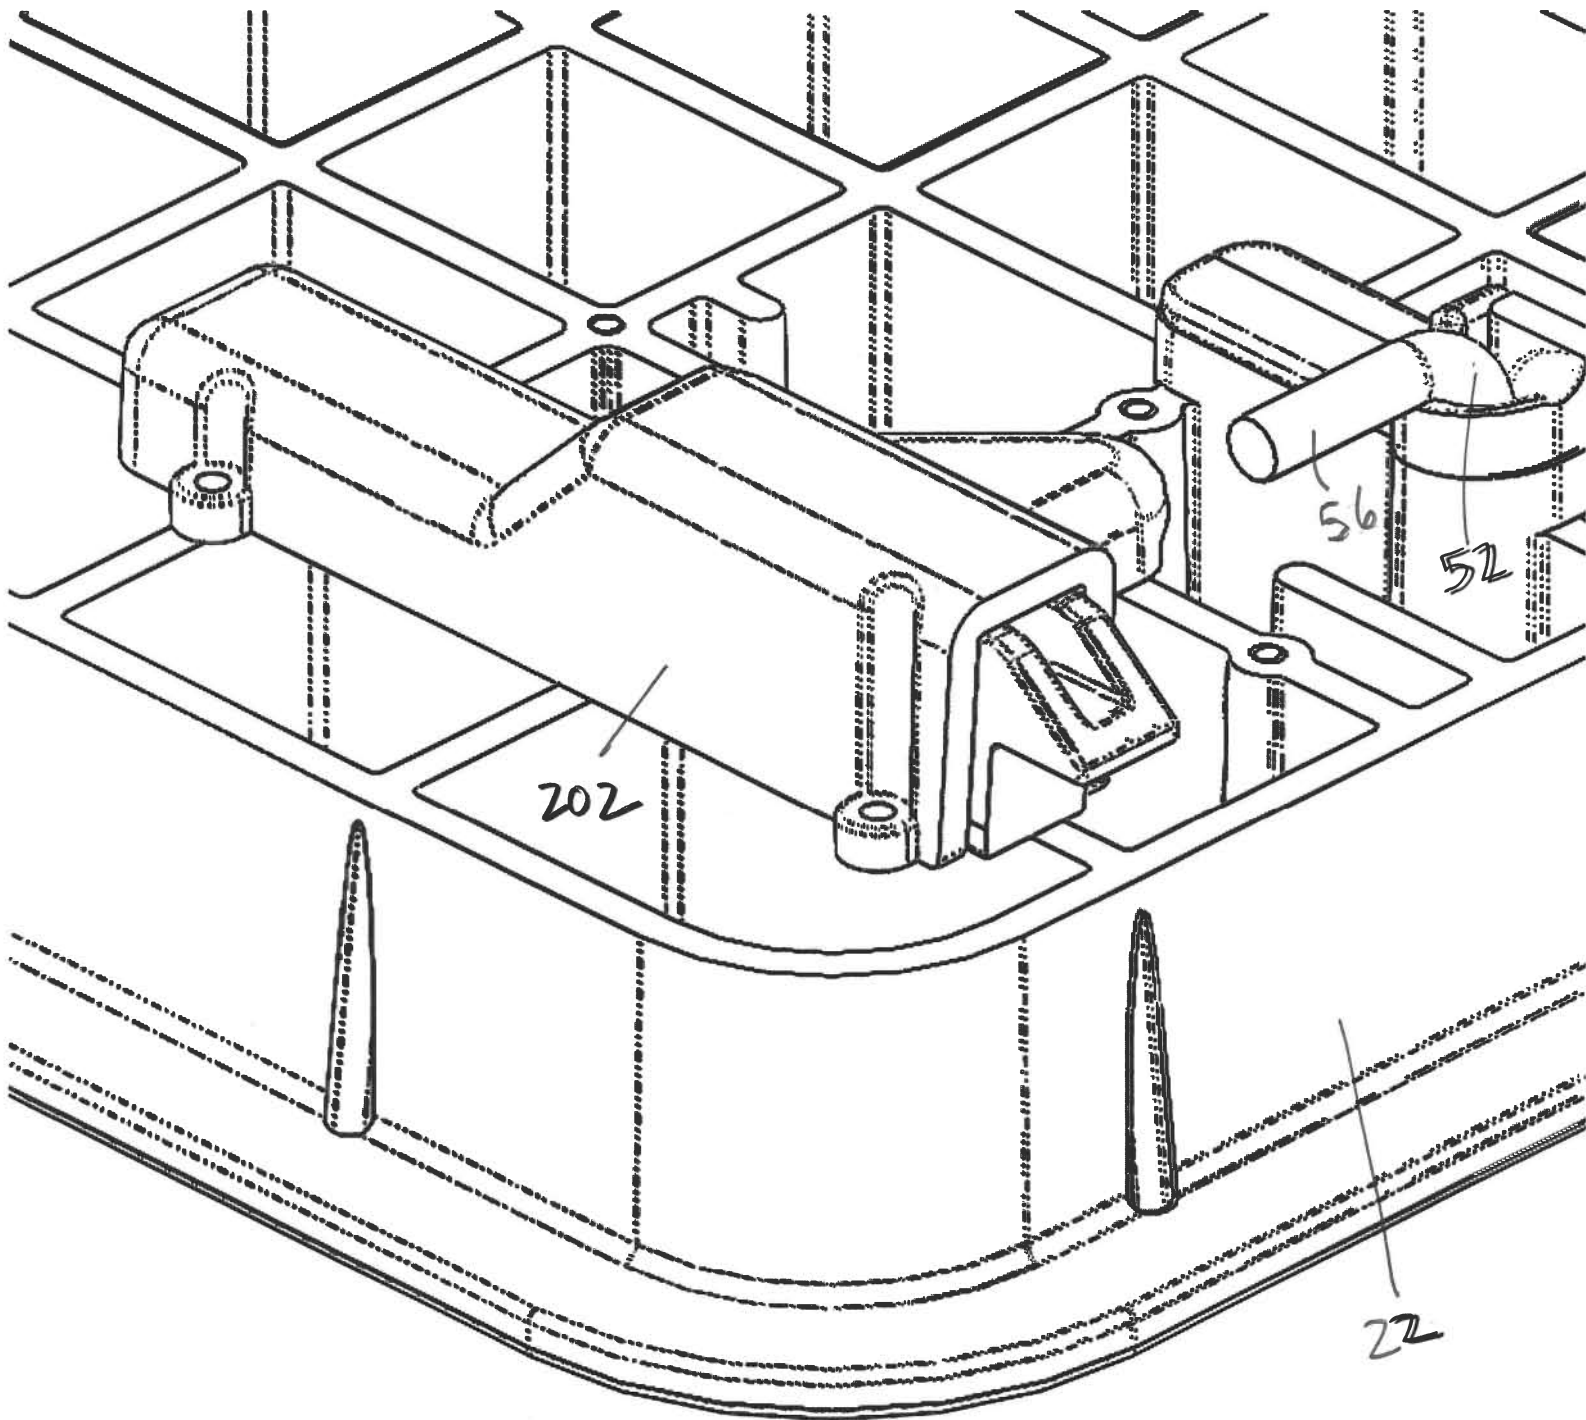

SLAM LATCH ASSEMBLY POSITIONED ON LID, IN LINE WITH L-BOLT

Fig. 22

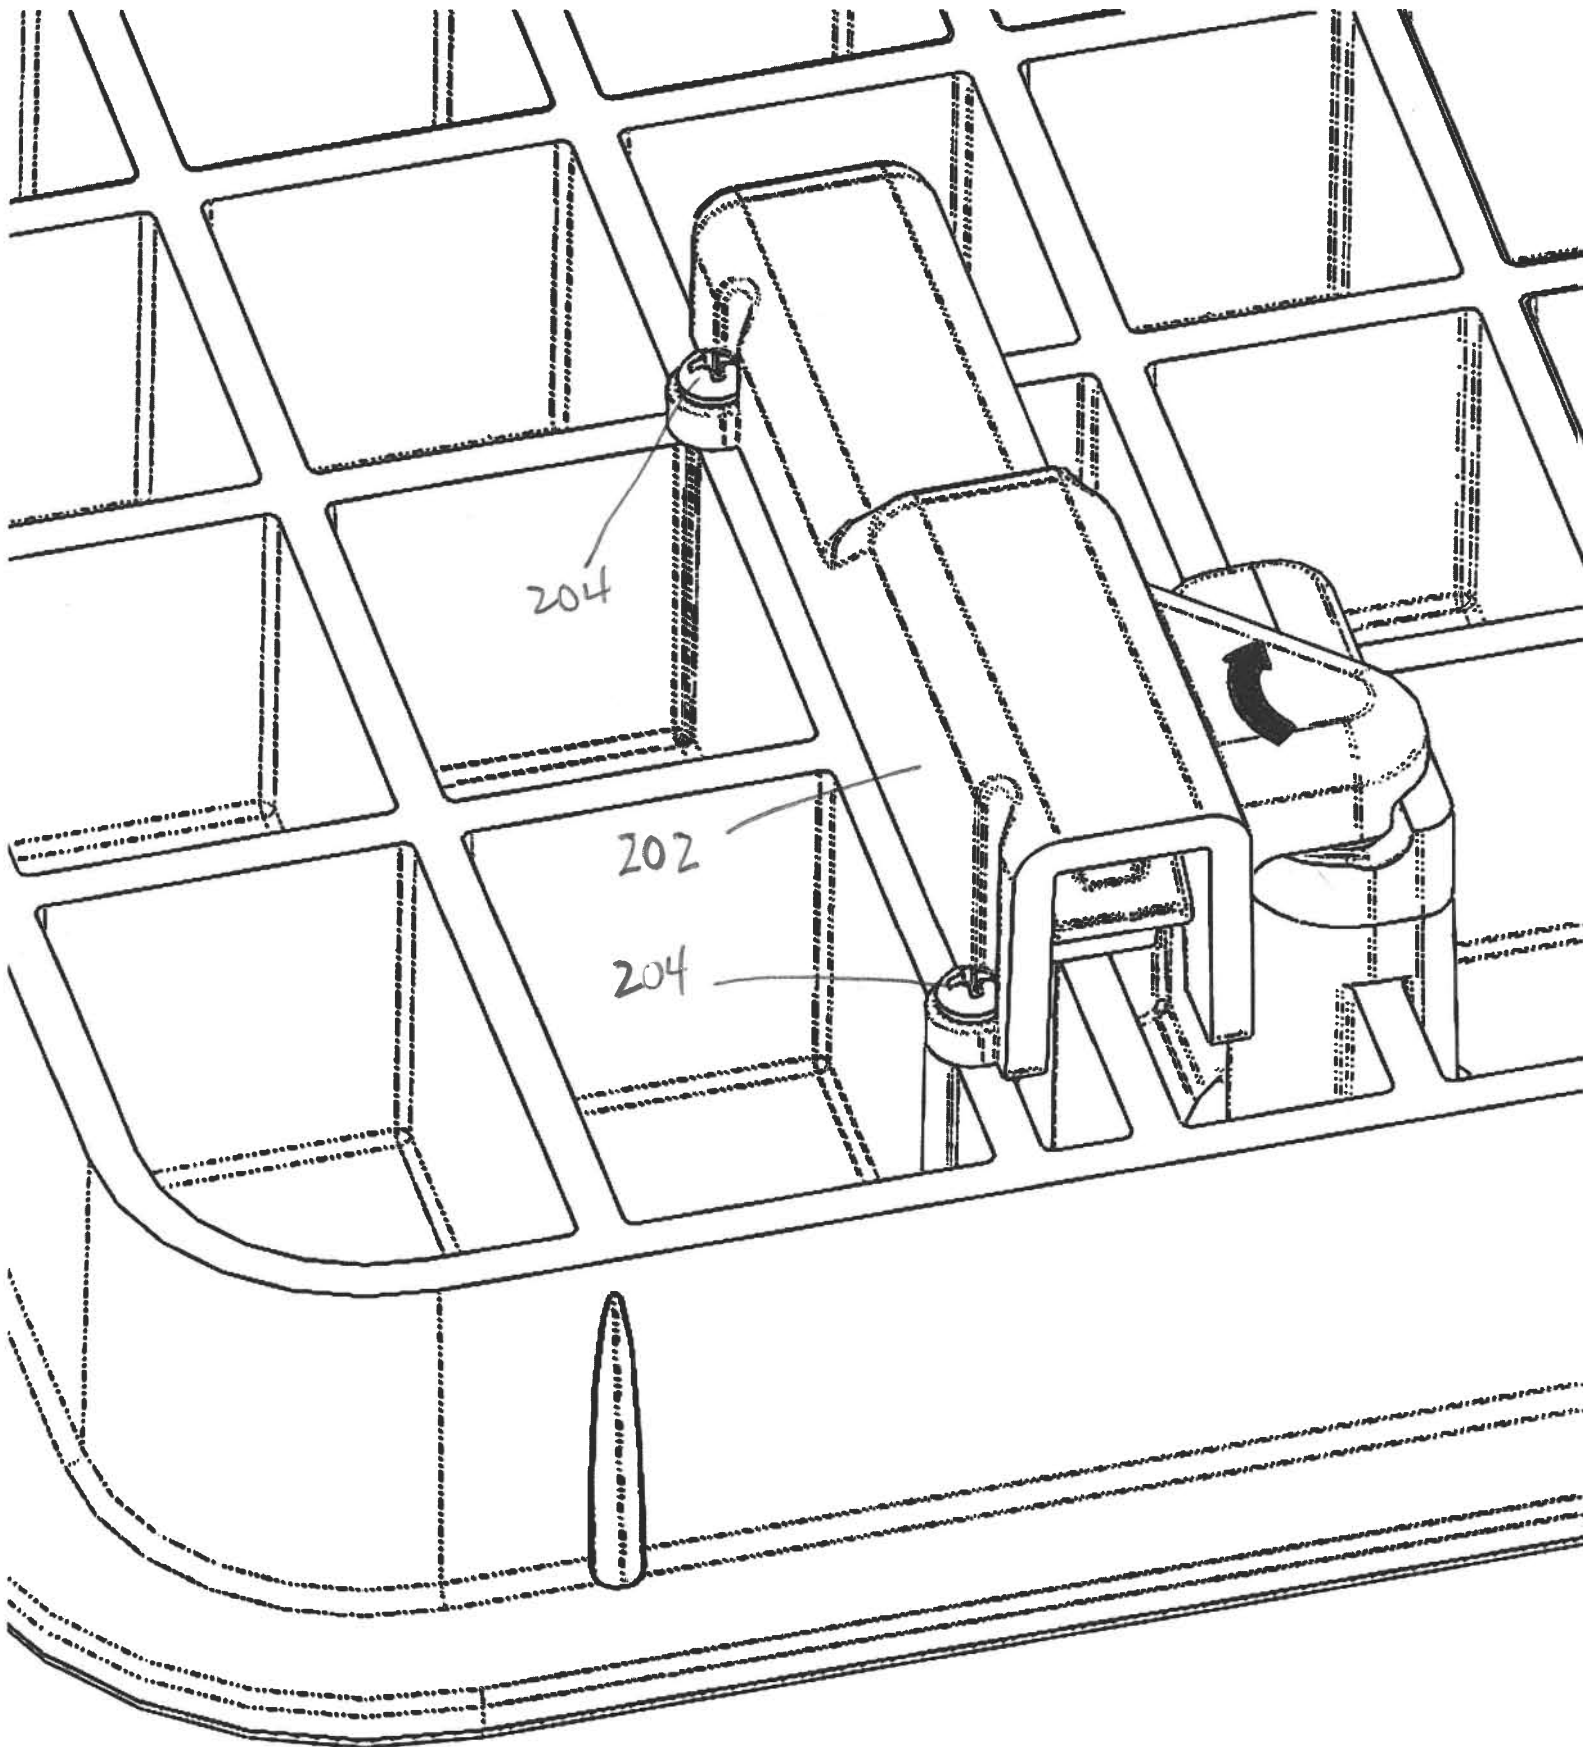

ROTATION OF L-BOLT RETRACTS SLIDE

FIG. 23