

FIG. 1

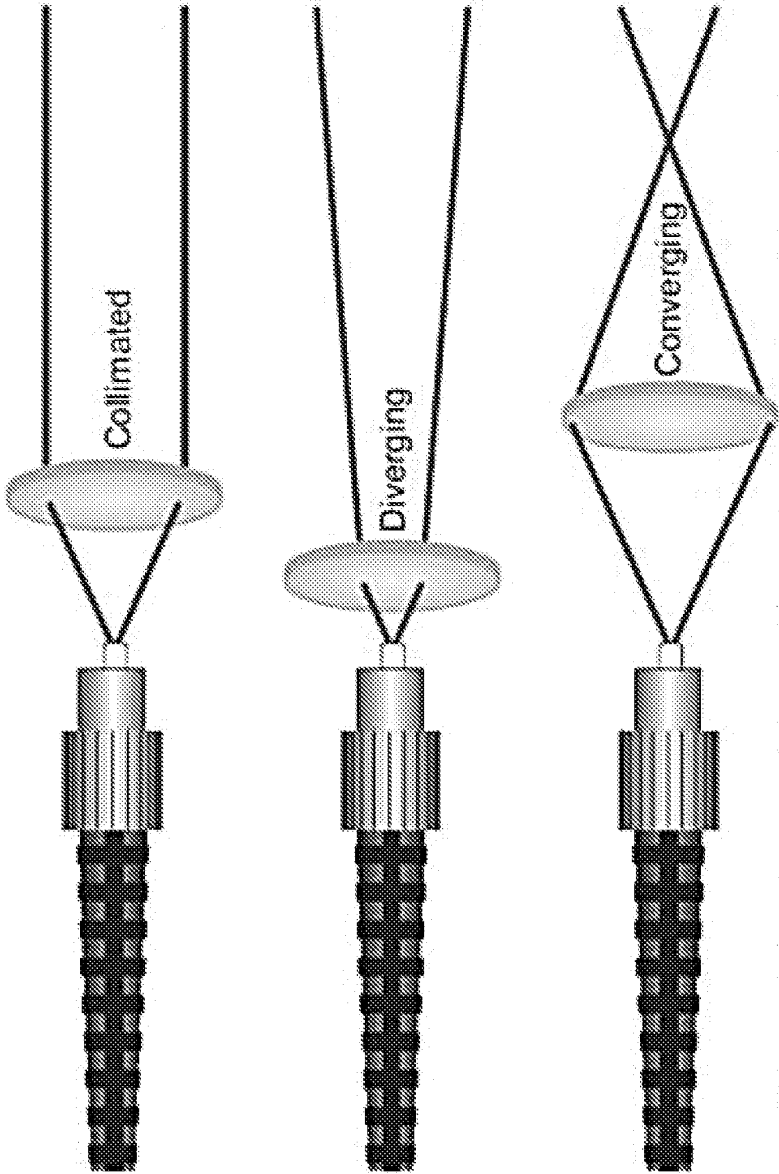


FIG. 2

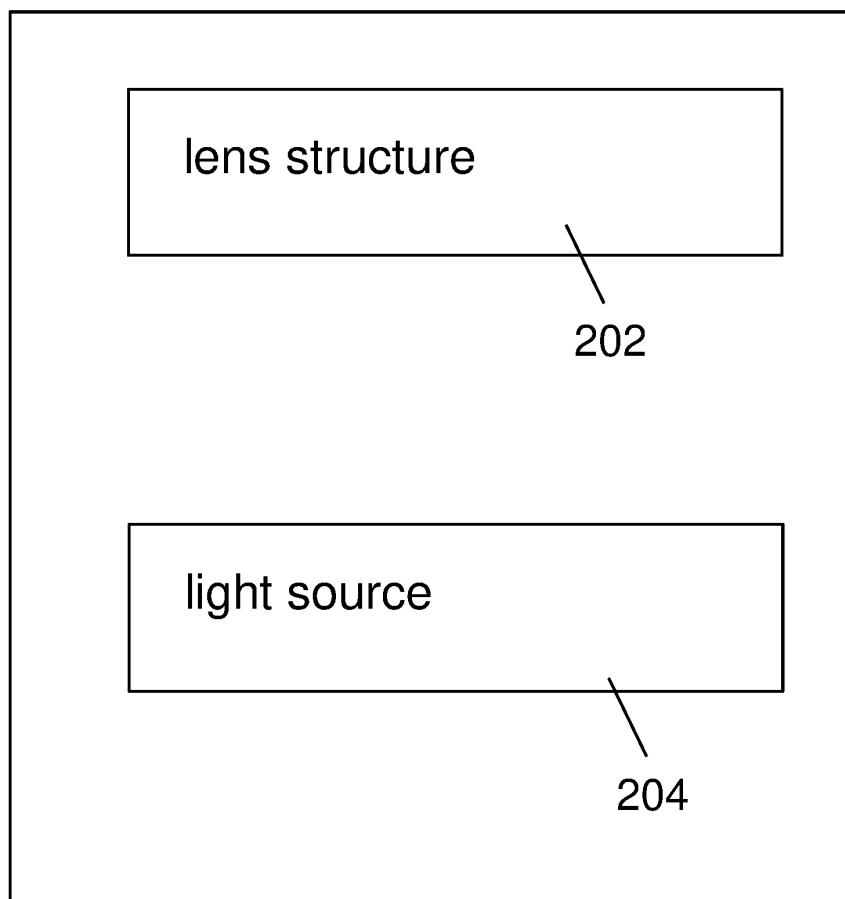


FIG. 3

form a lens structure configured to generate an outgoing Gaussian beam based on an incoming Gaussian beam provided by a light source

302

4/30

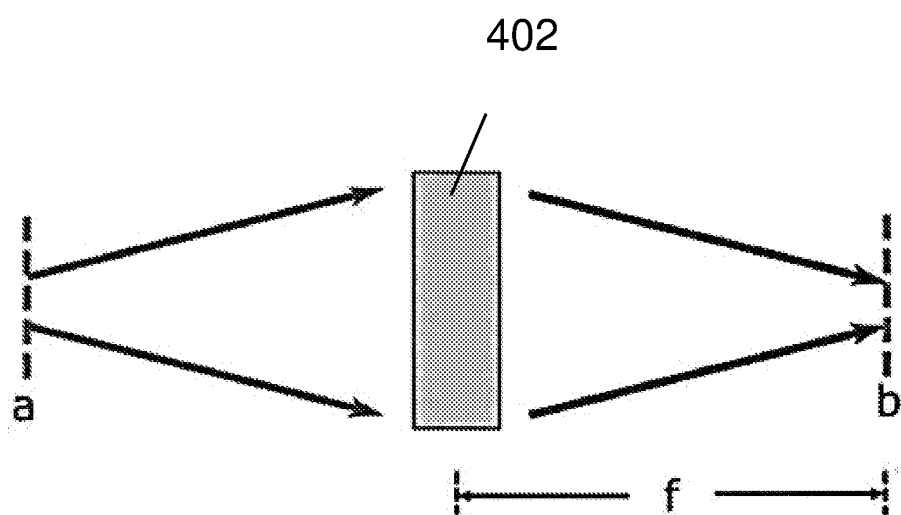
FIG. 4

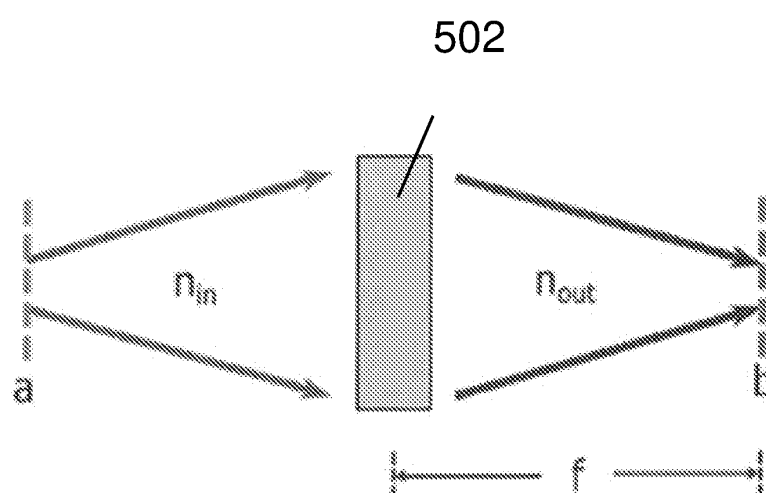
FIG. 5

FIG. 6

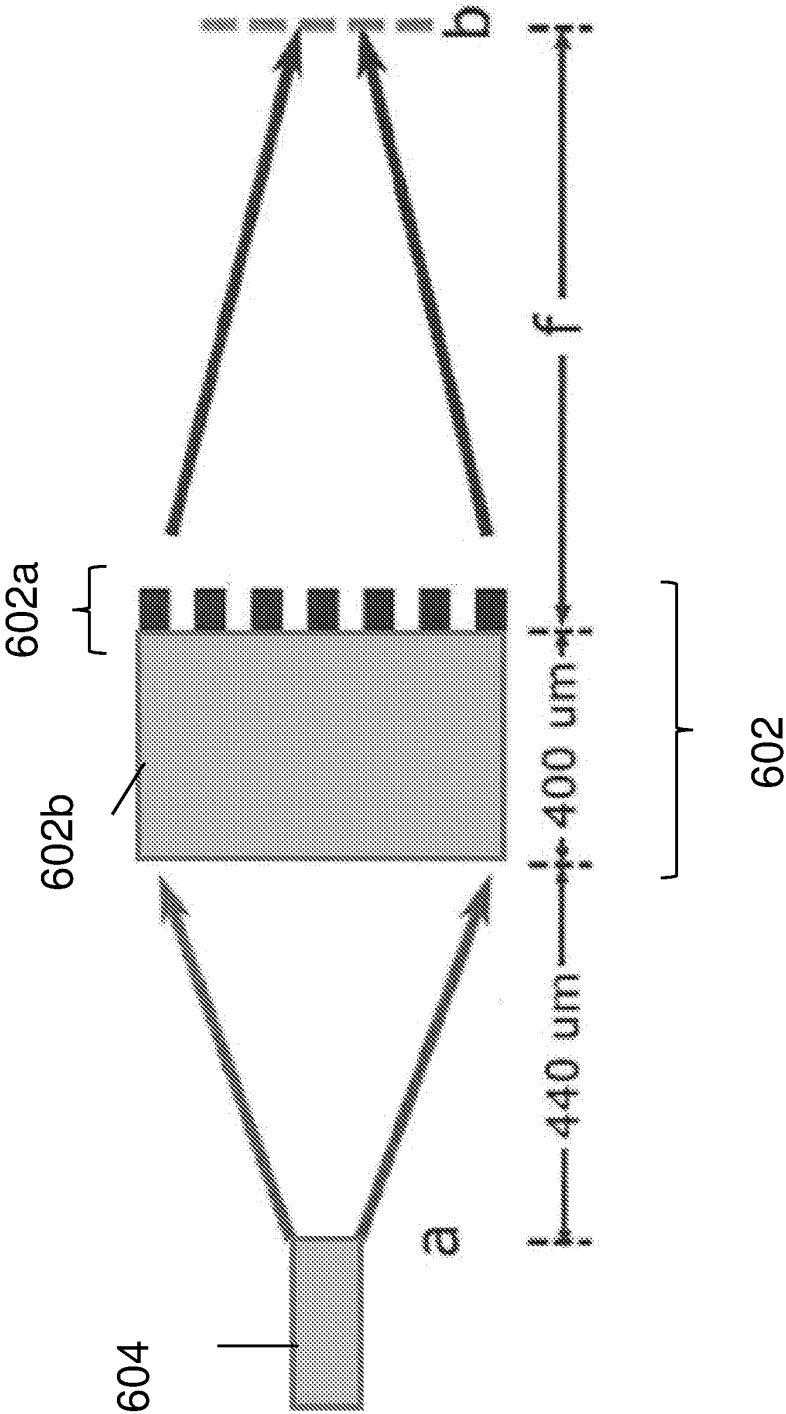


FIG. 7

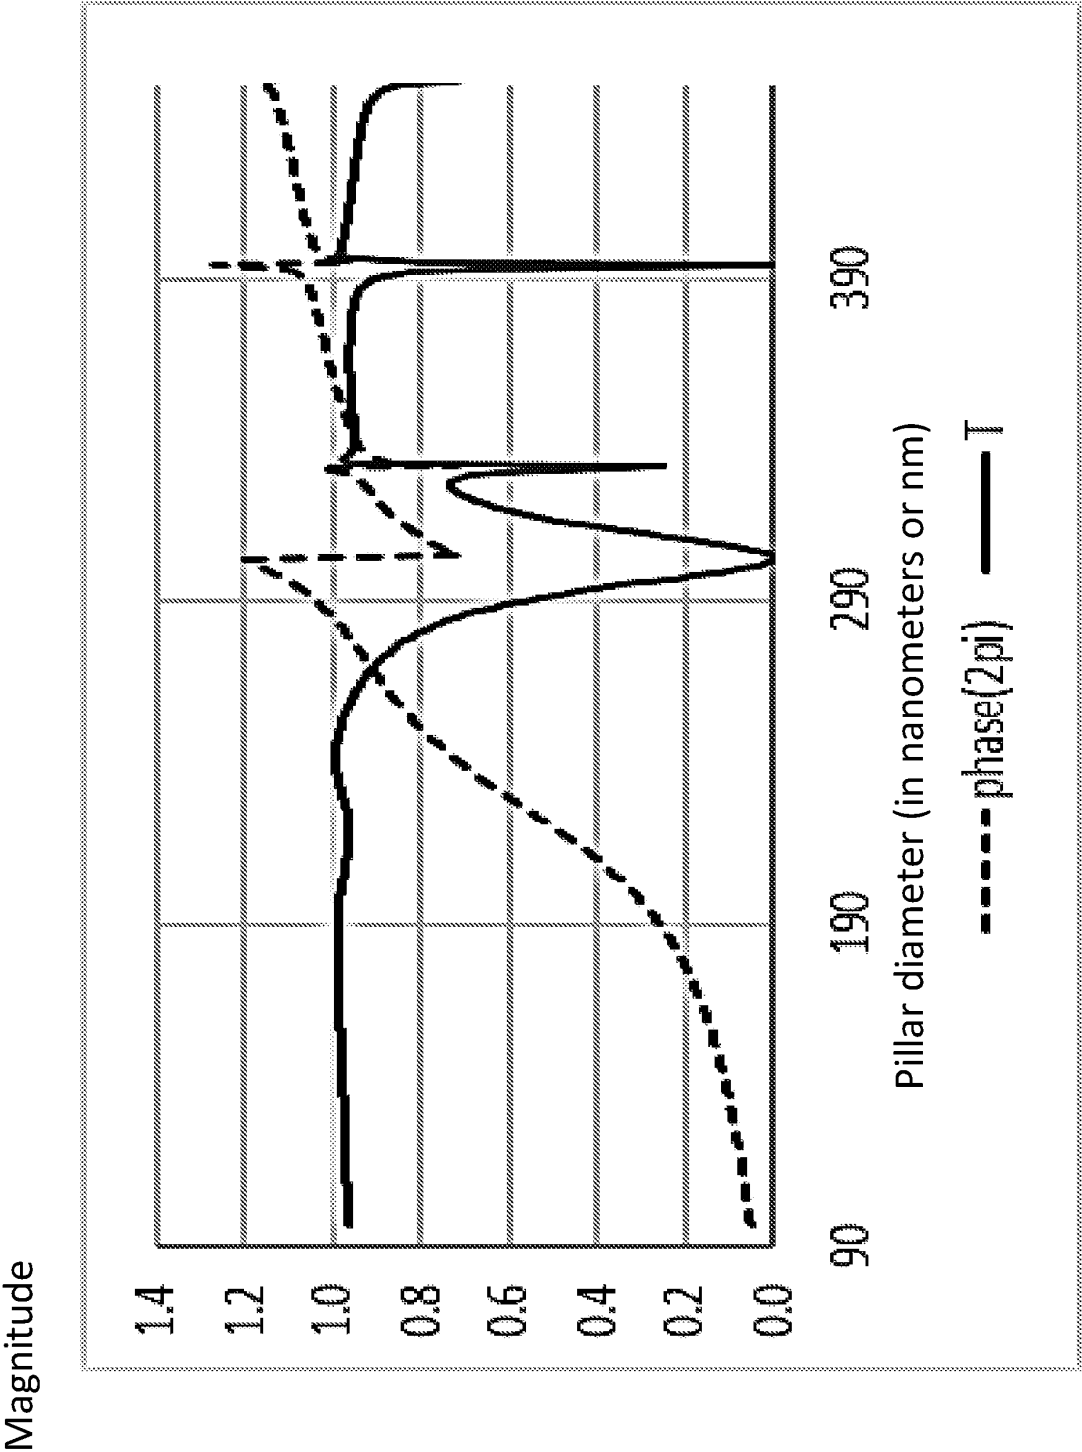
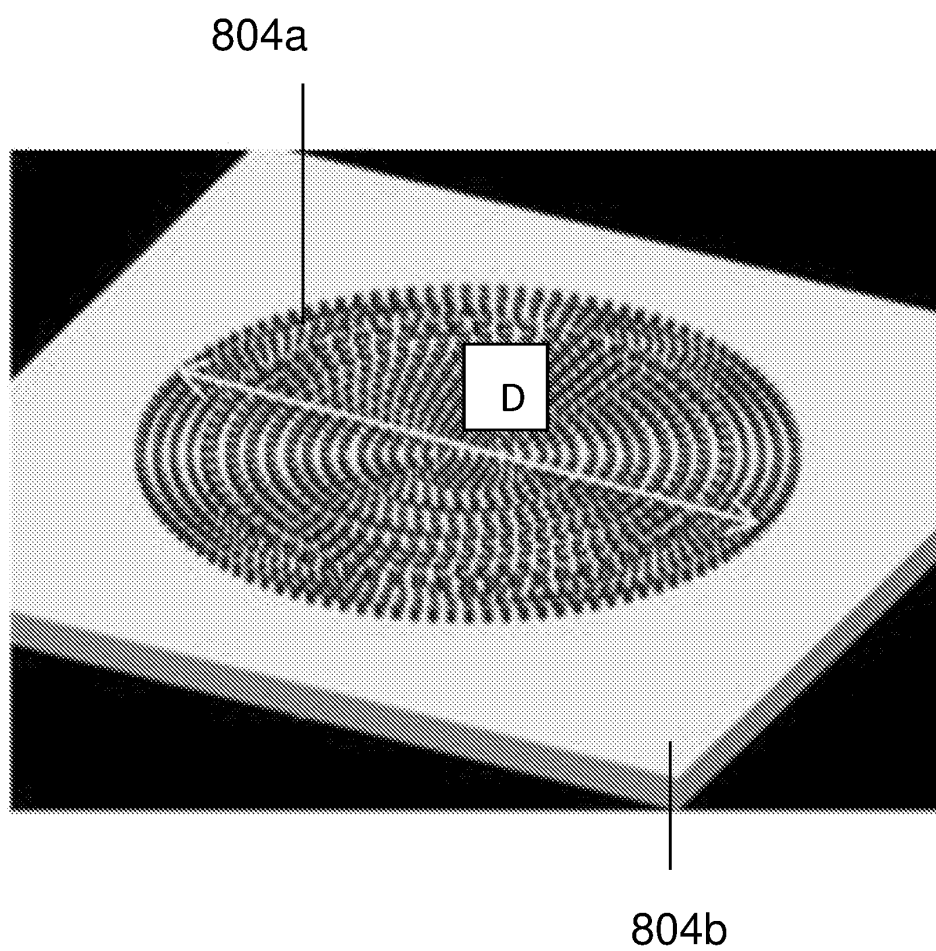
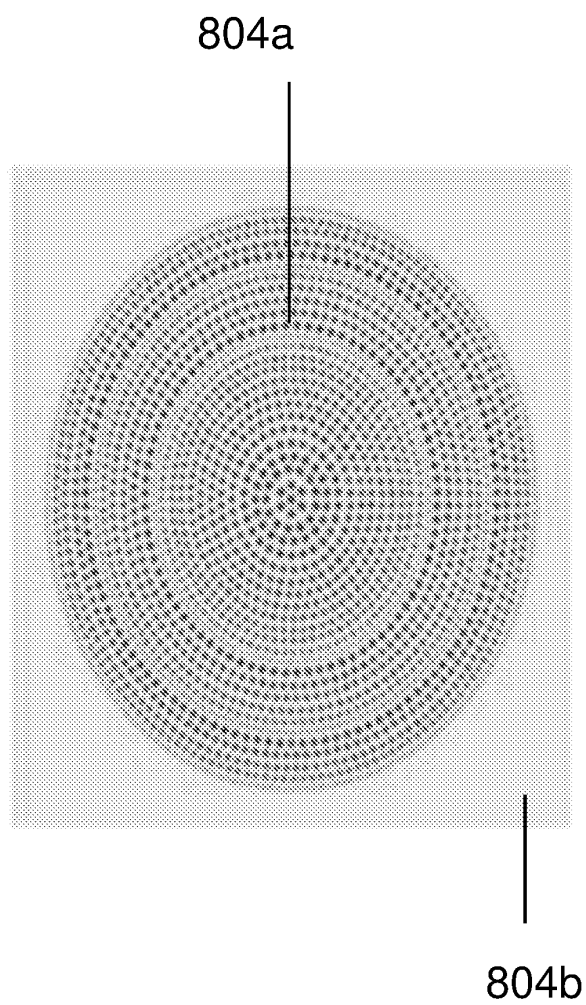


FIG. 8A

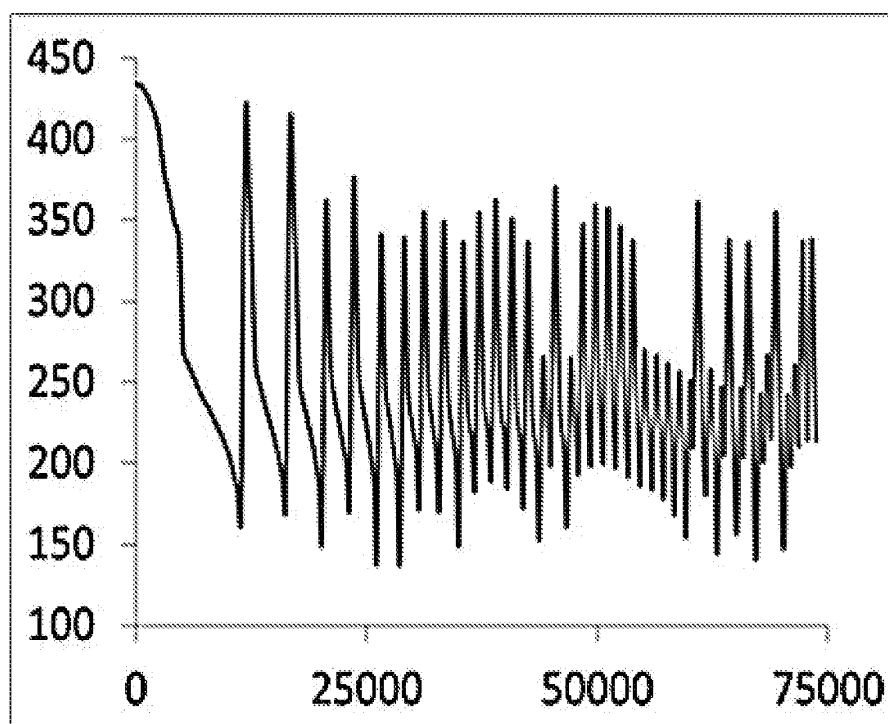


9/30

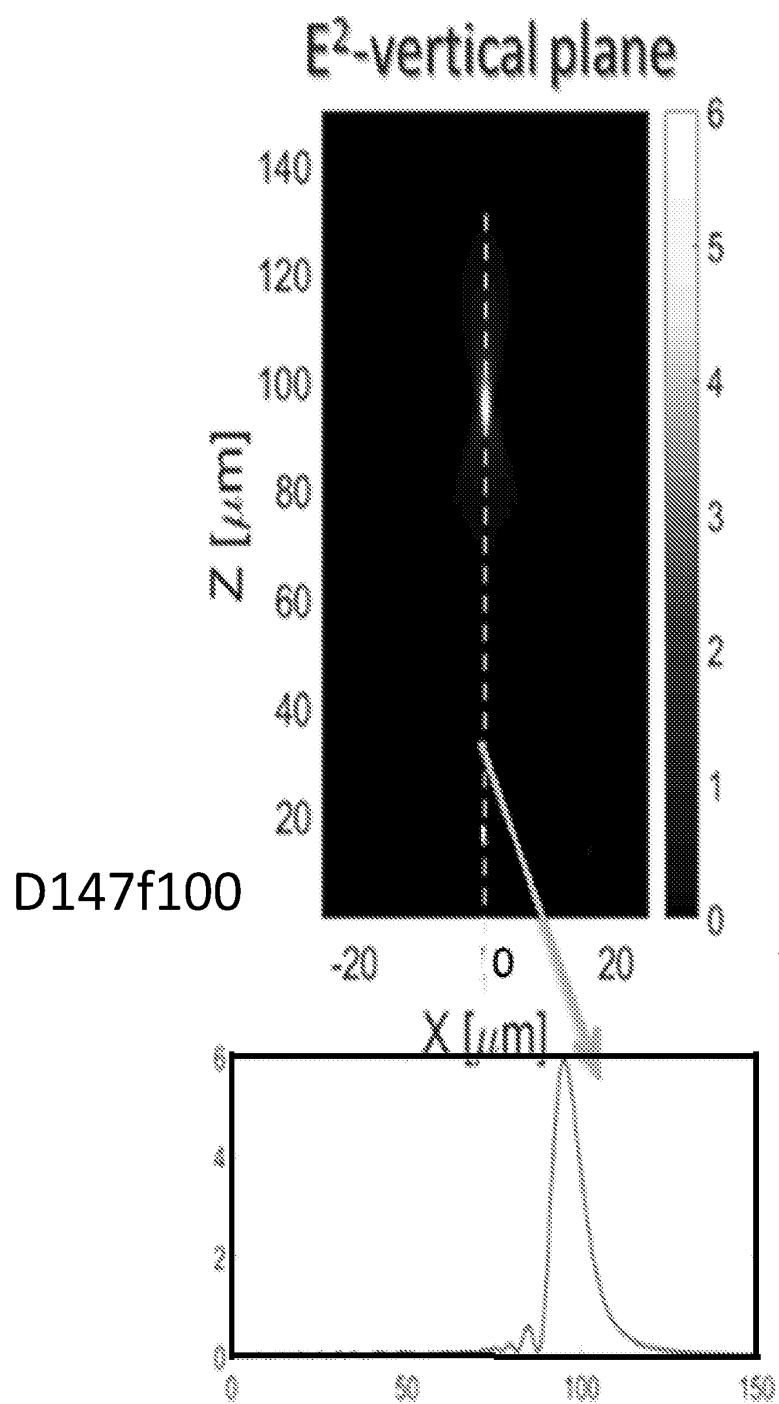
FIG. 8B



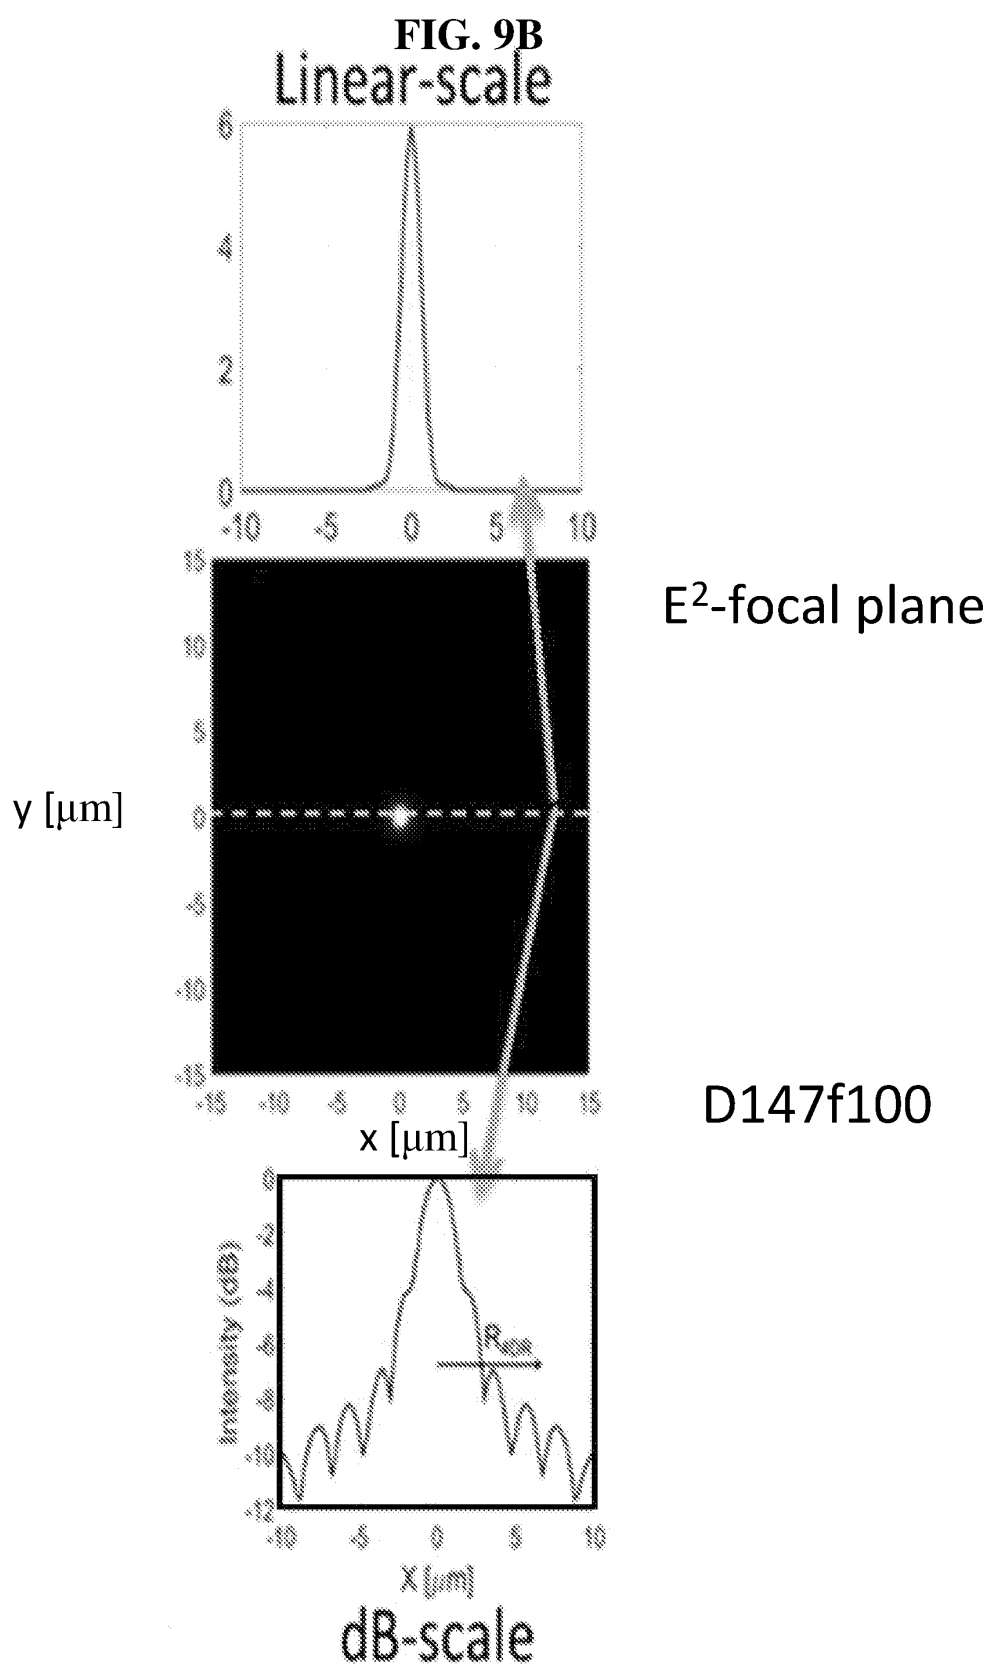
10/30

FIG. 8C

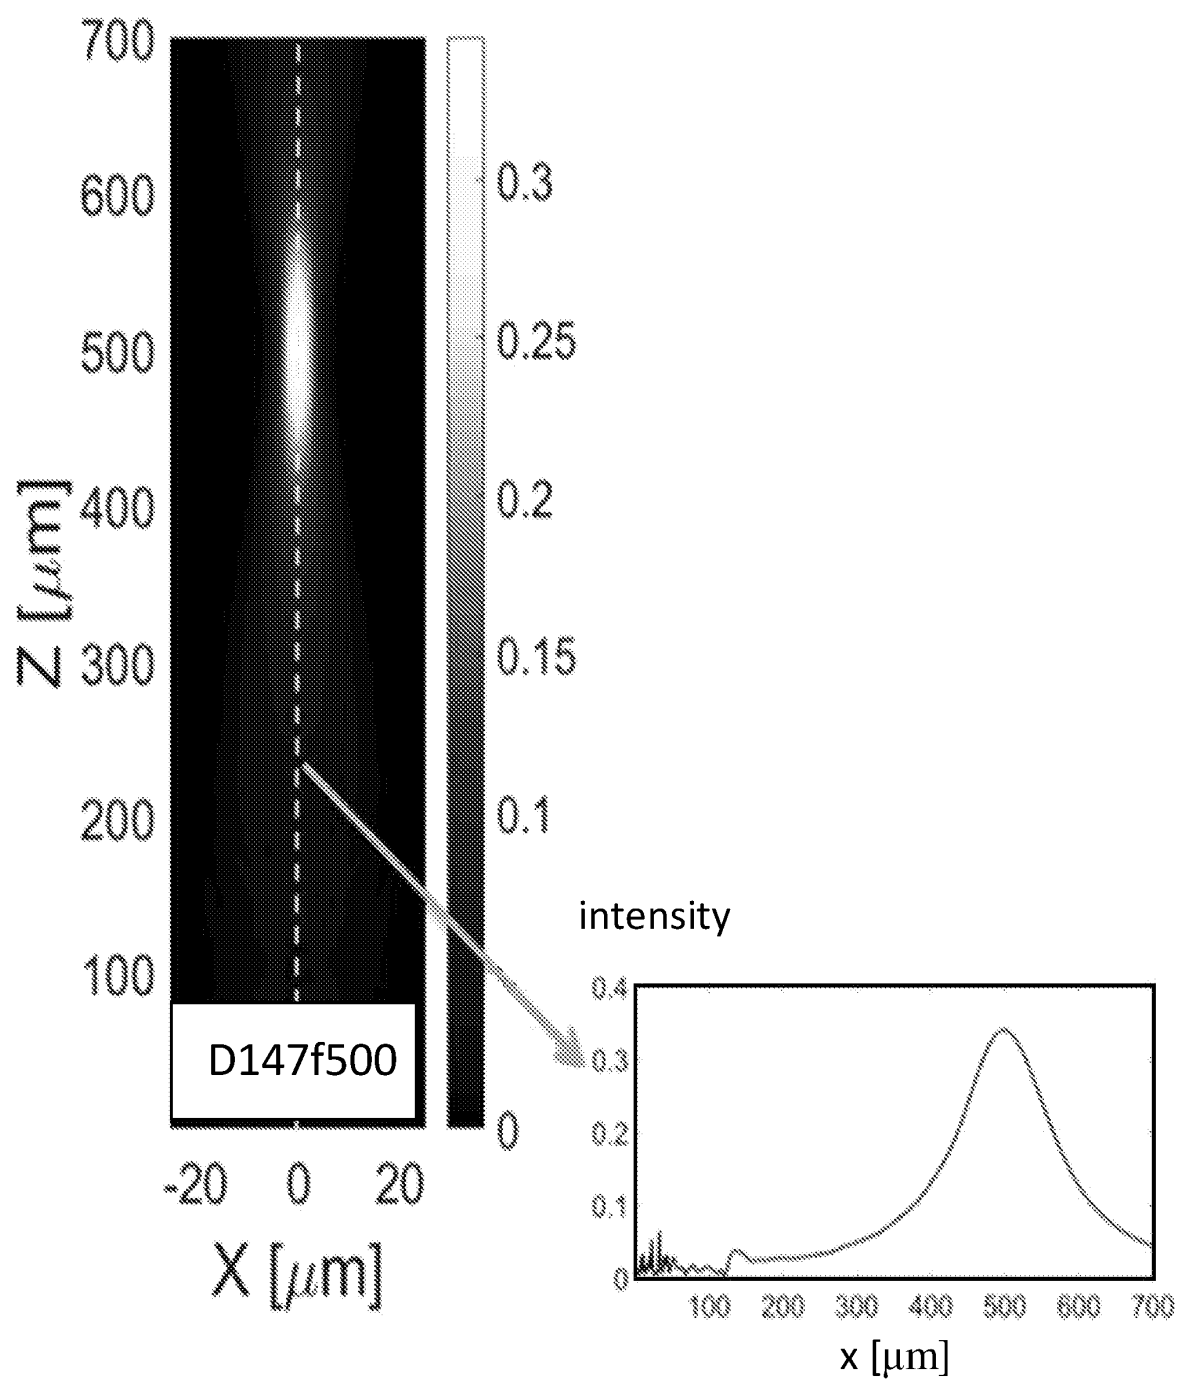
11/30

FIG. 9A

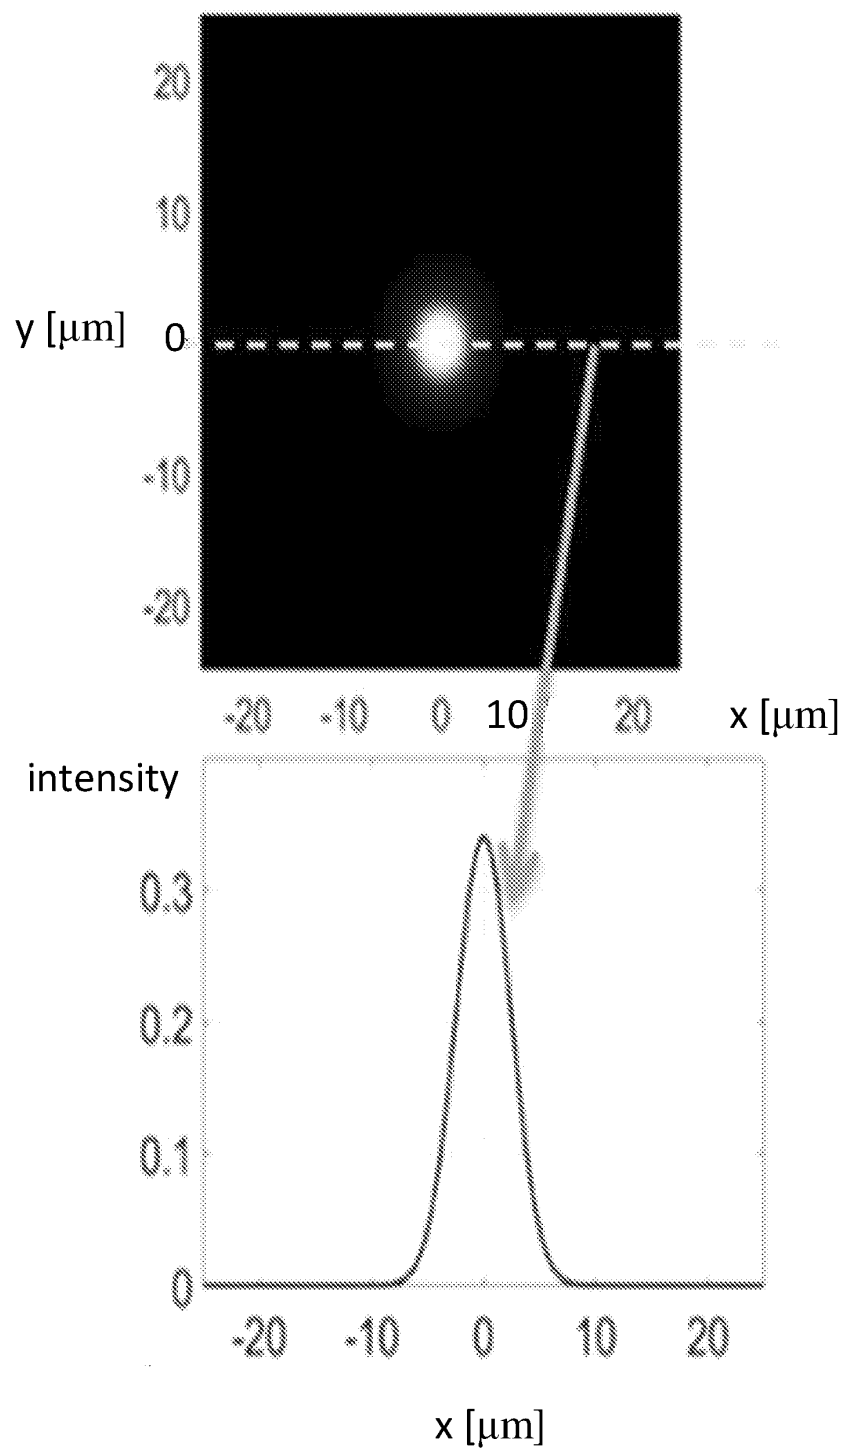
12/30



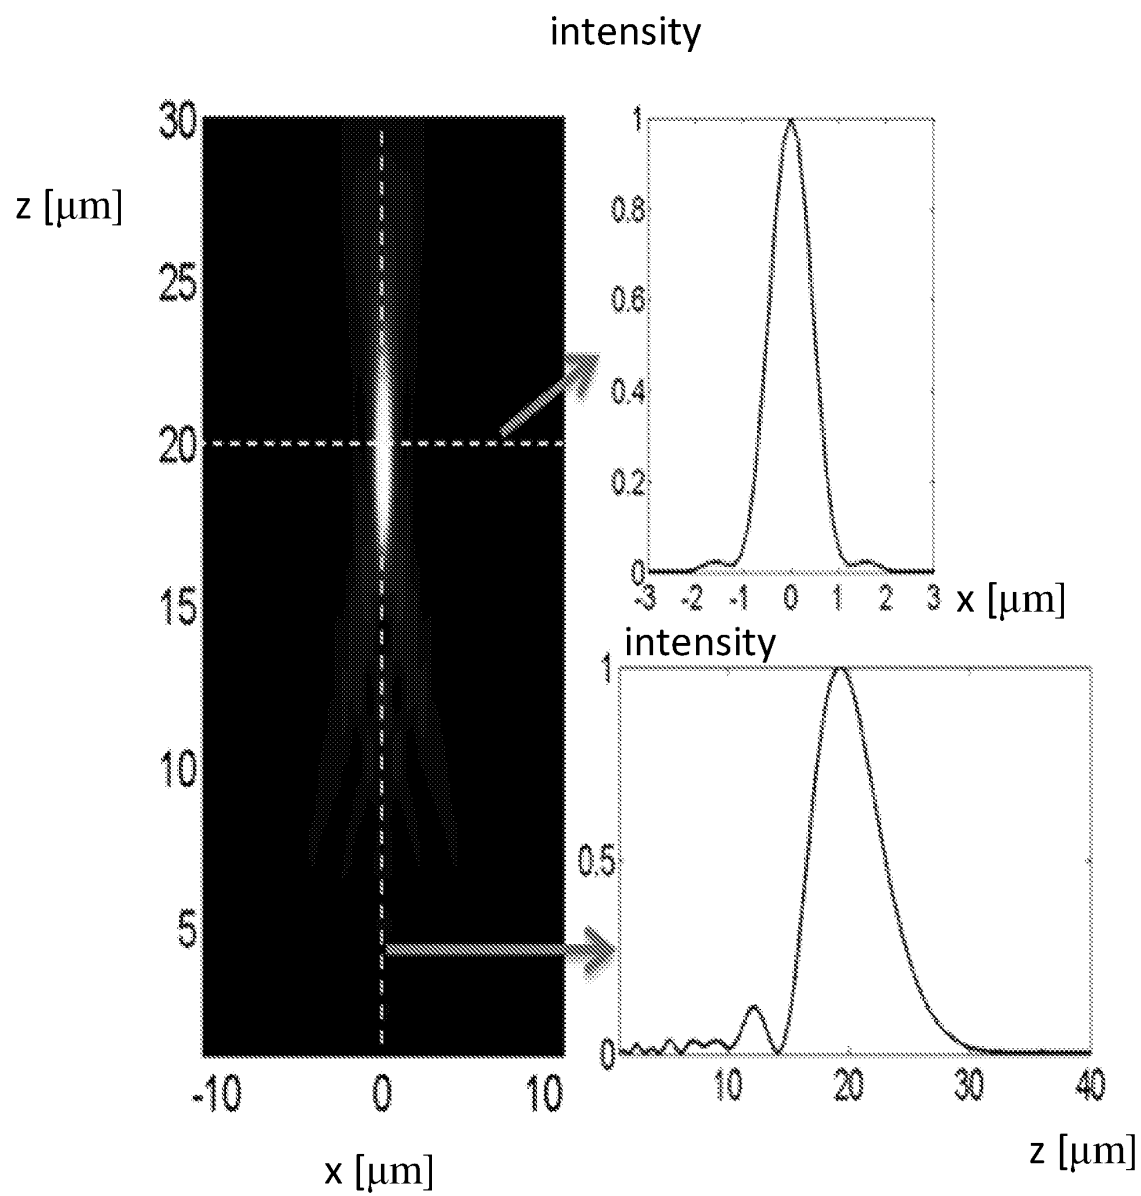
13/30

FIG. 9C

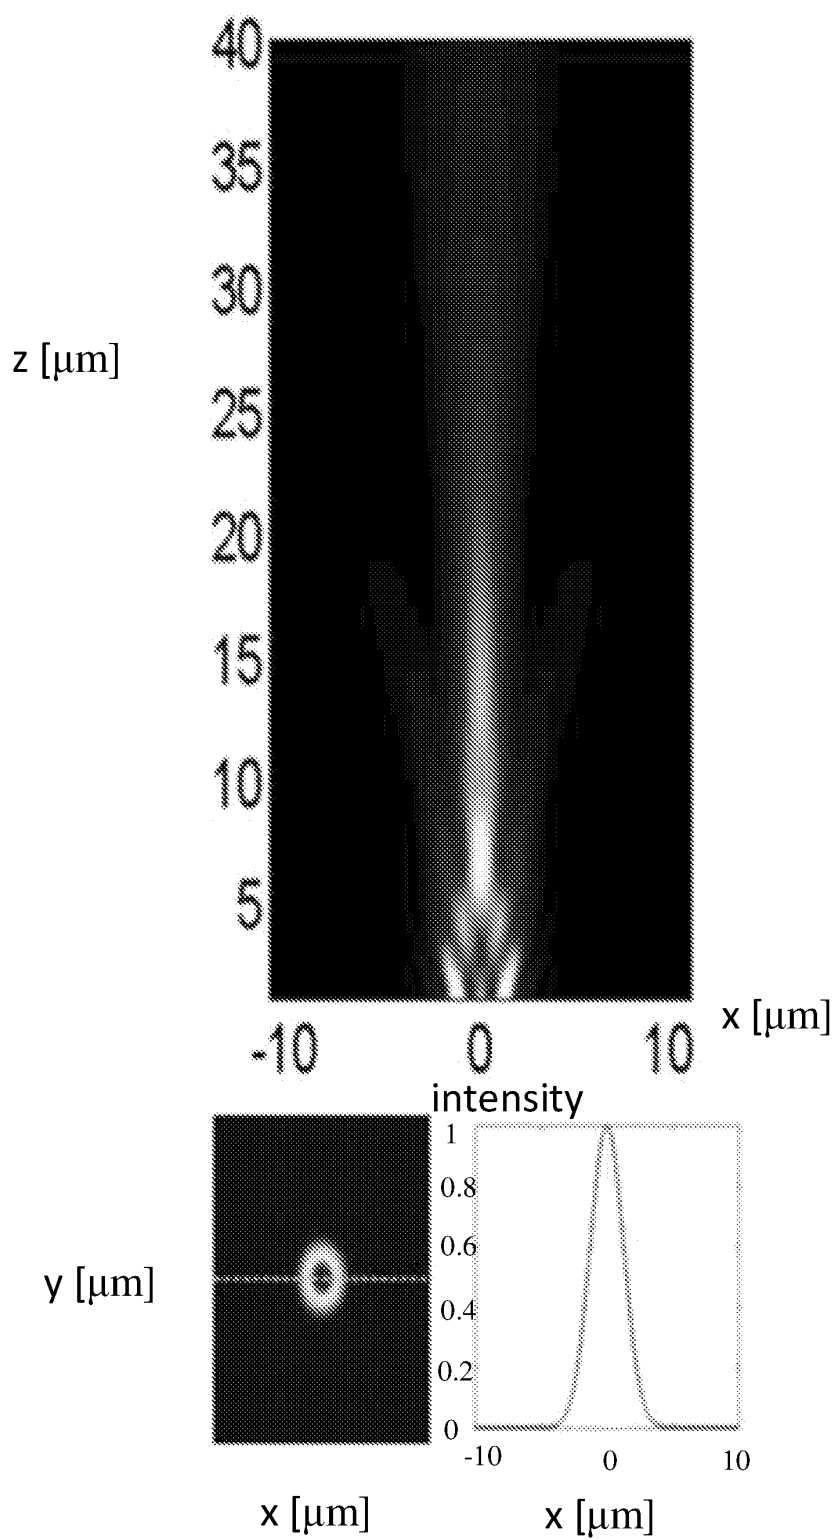
14/30

FIG. 9D

15/30

FIG. 10A

16/30

FIG. 10B

17/30

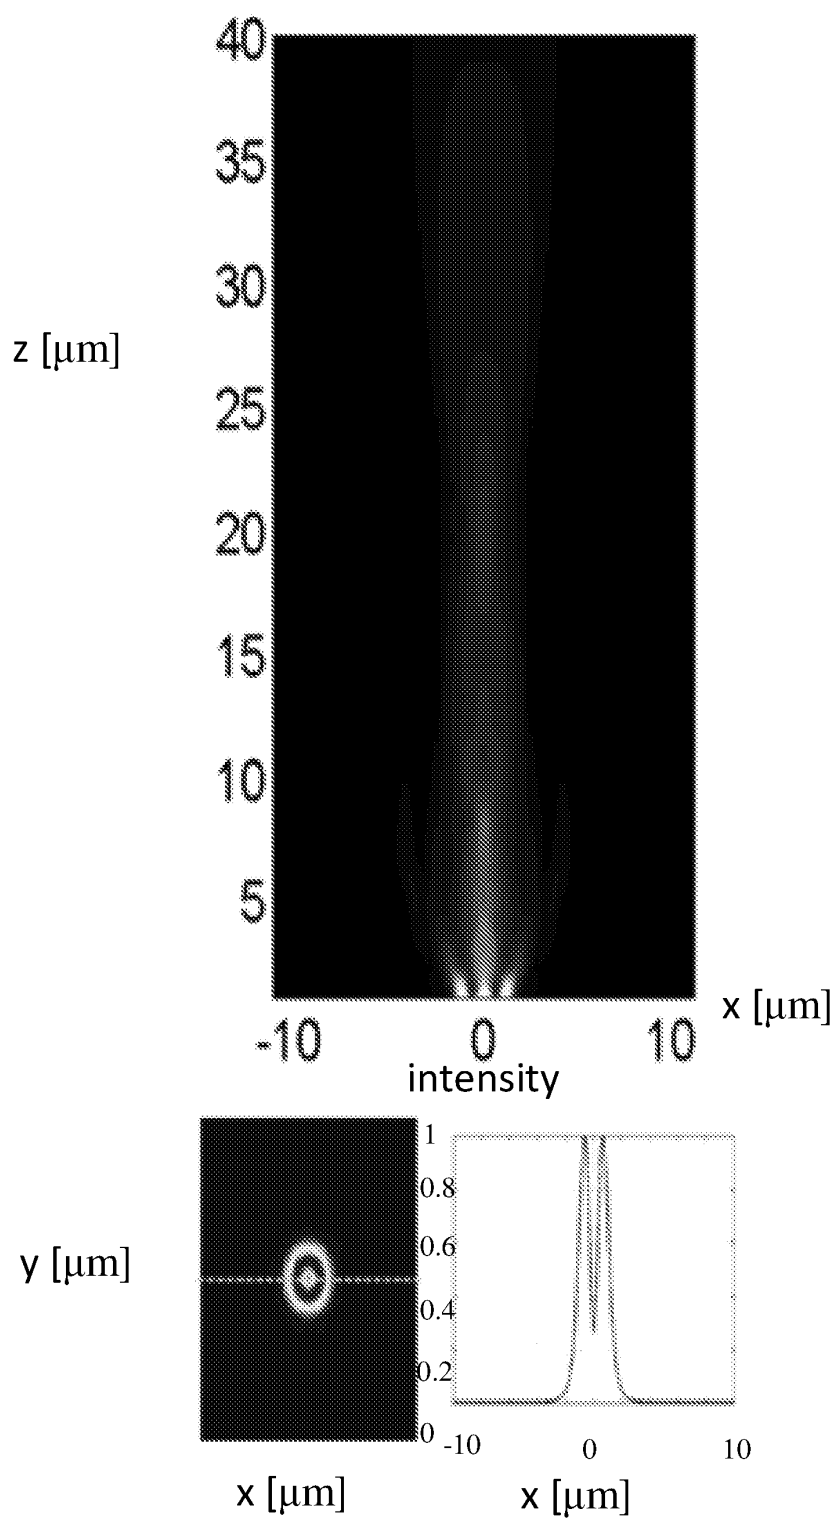
FIG. 10C

FIG. 11A

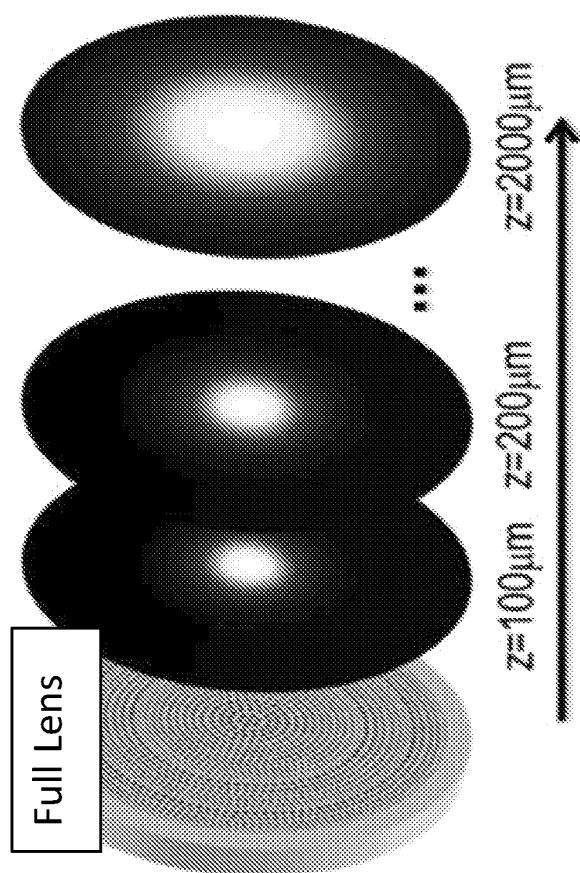
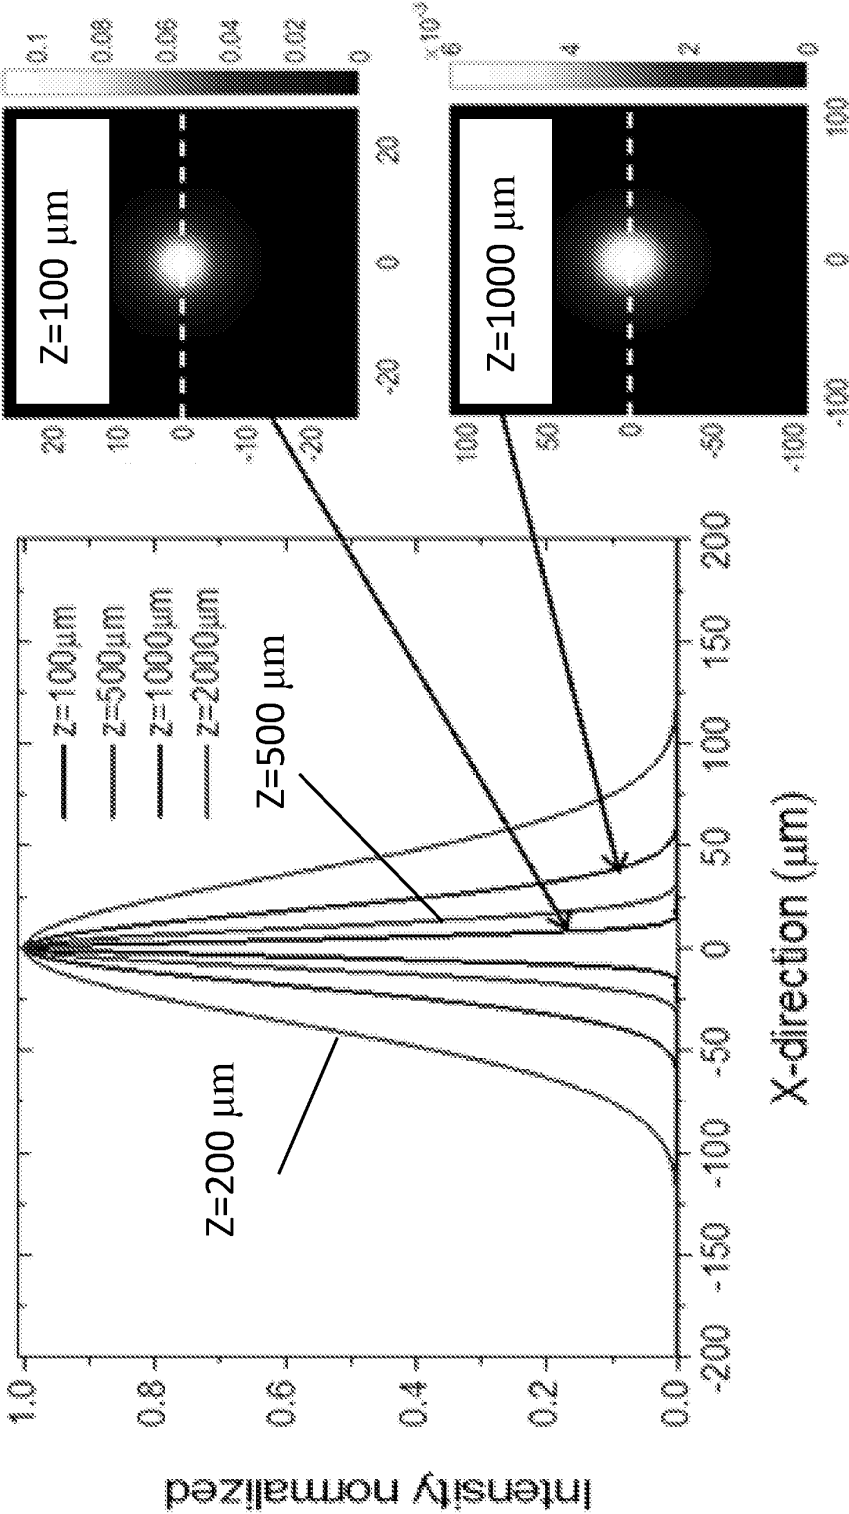


FIG. 11B



20/30

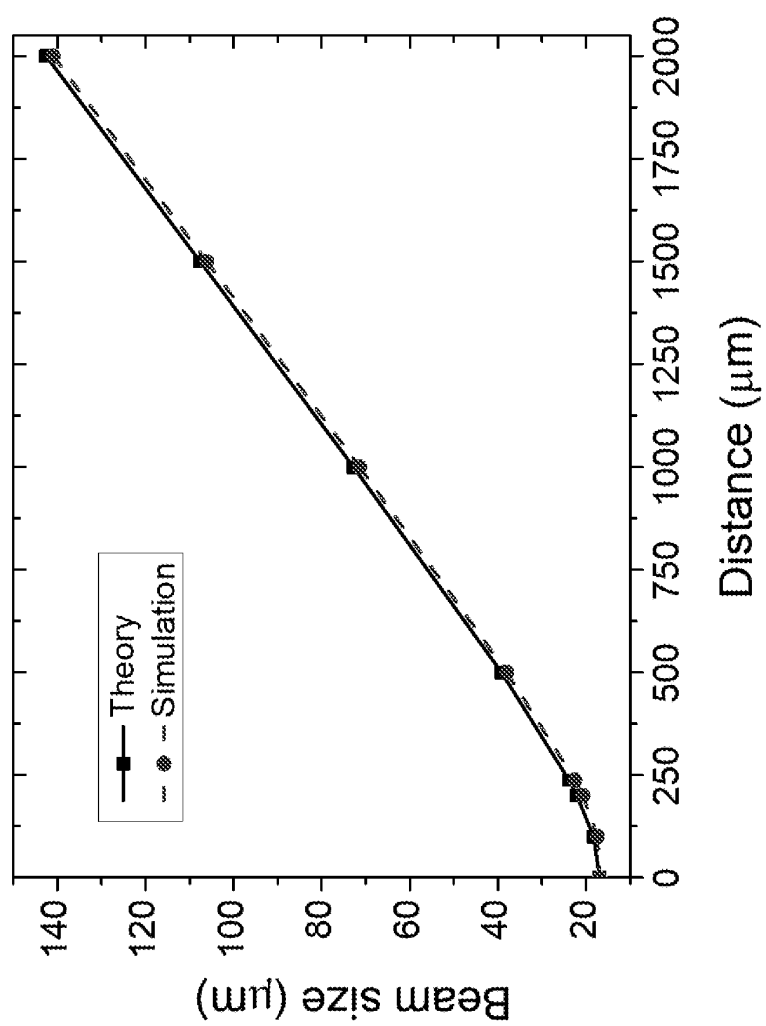
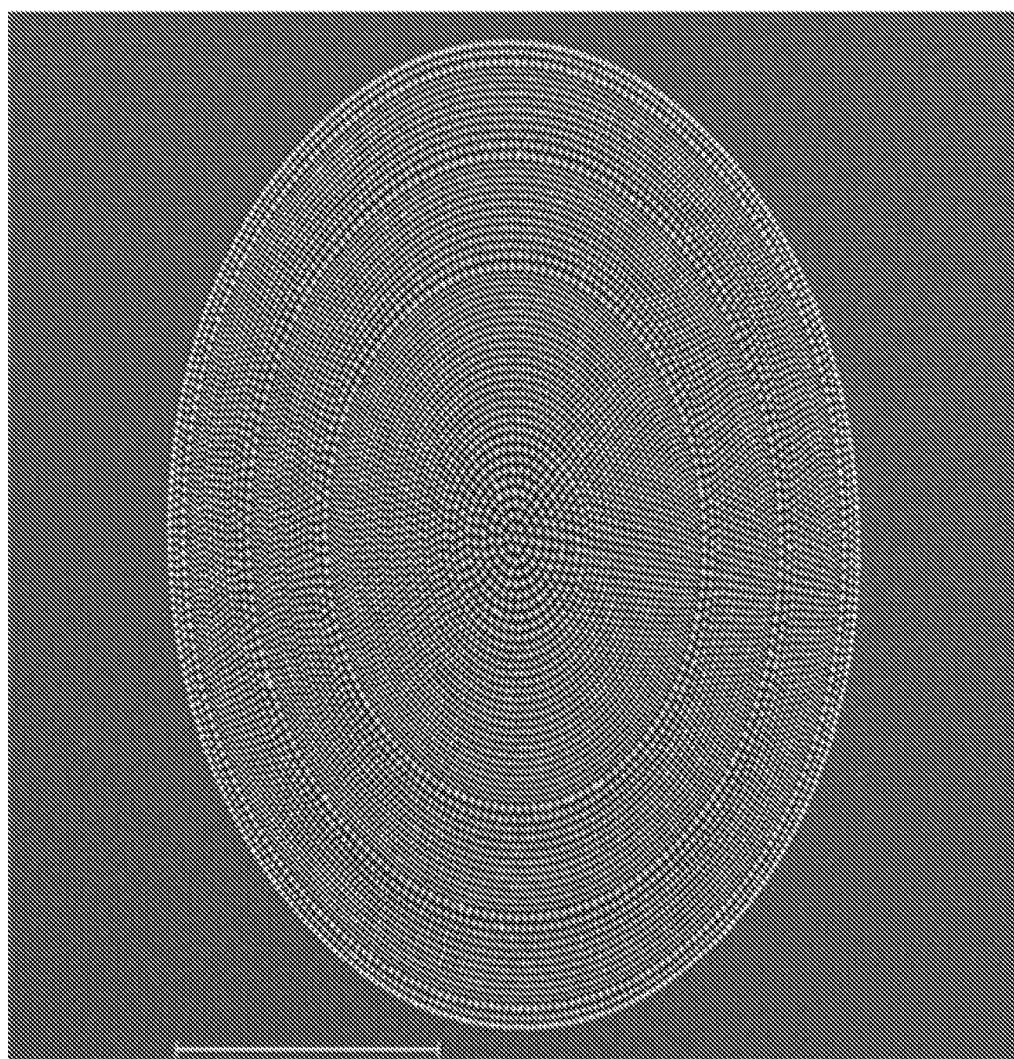
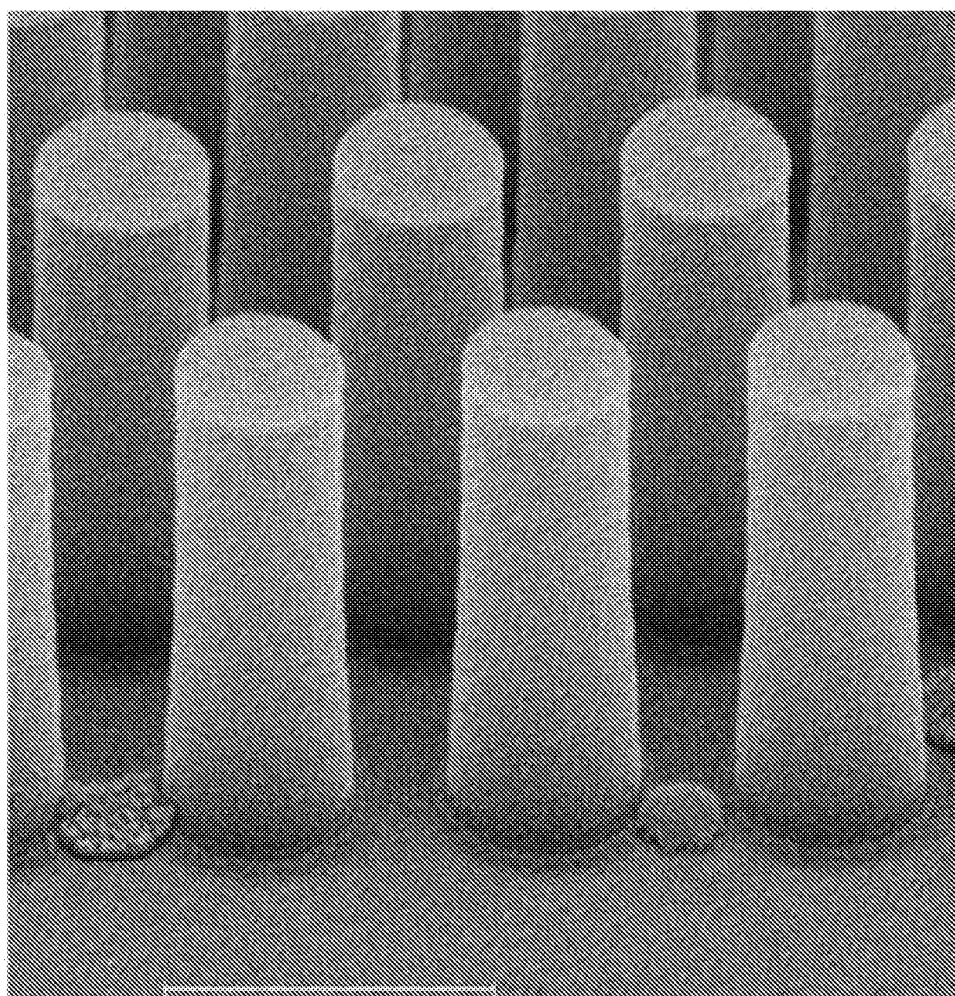
FIG. 12

FIG. 13A



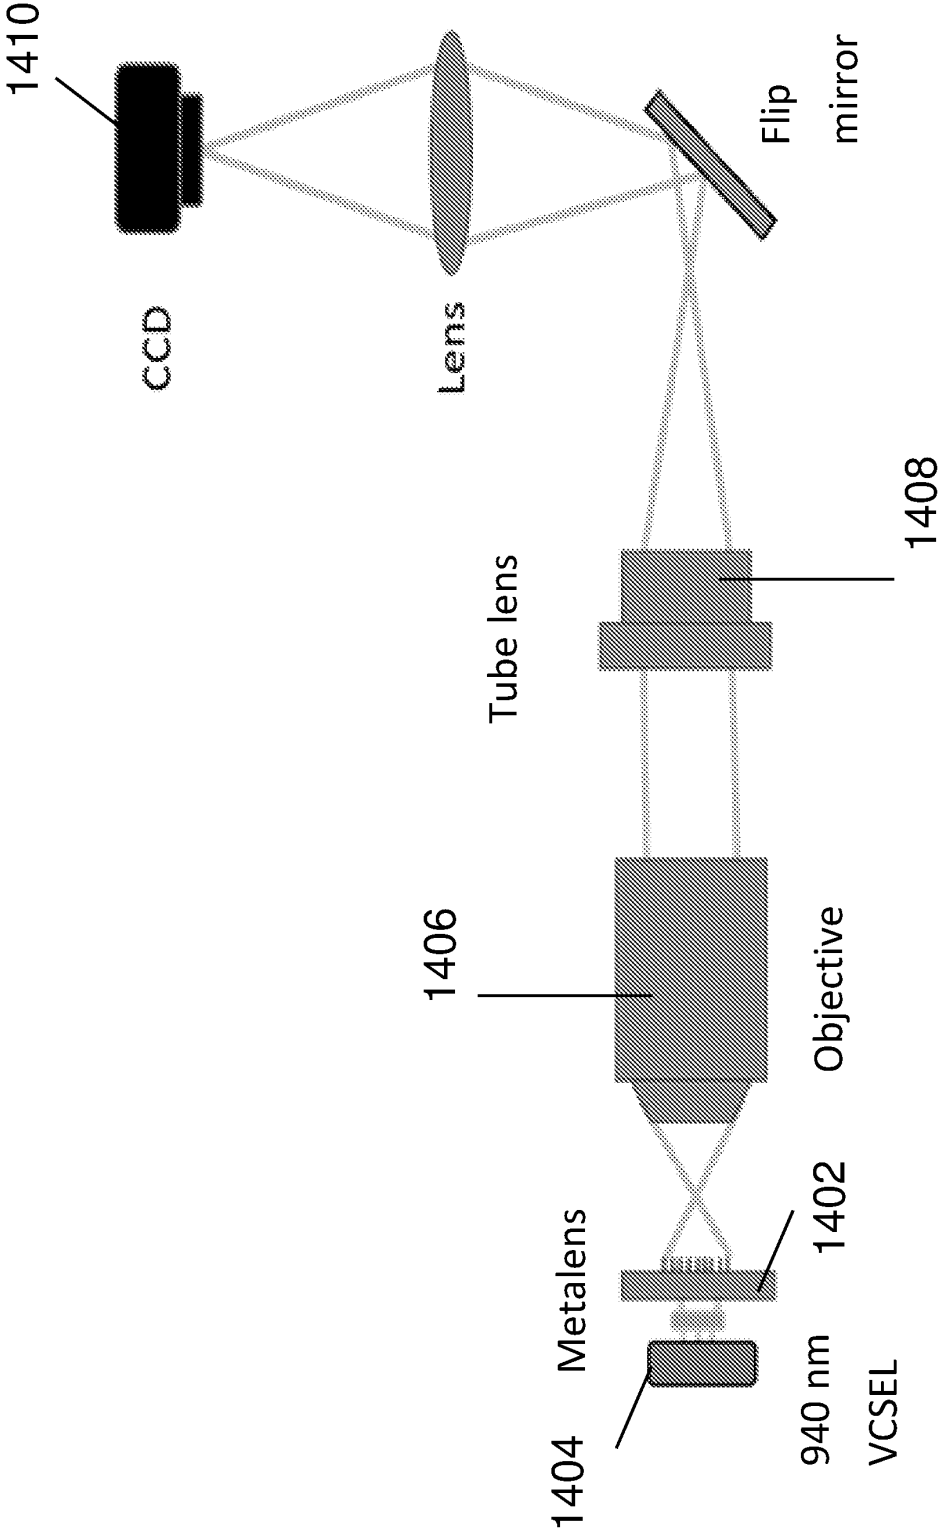
20 μm 1,5000X 5.00kV

FIG. 13B

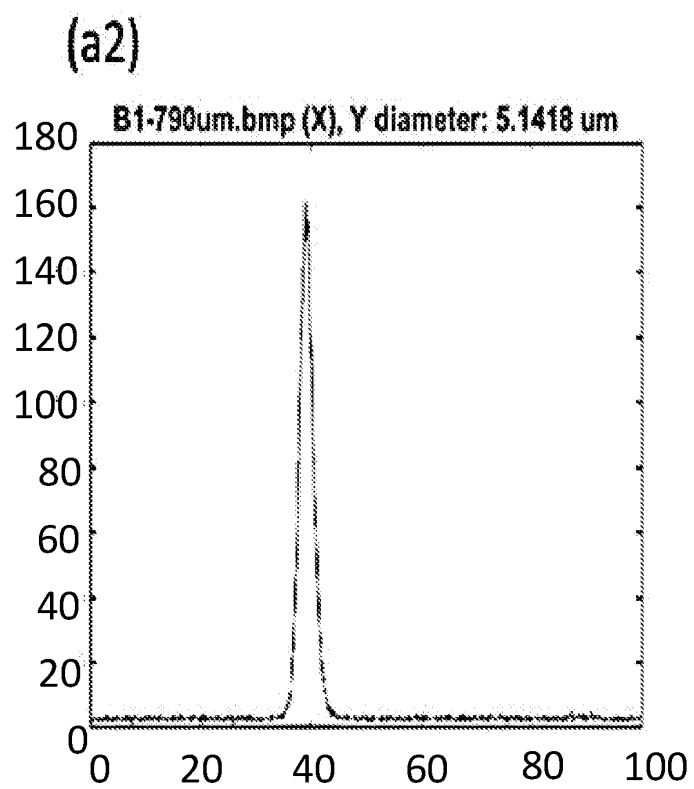
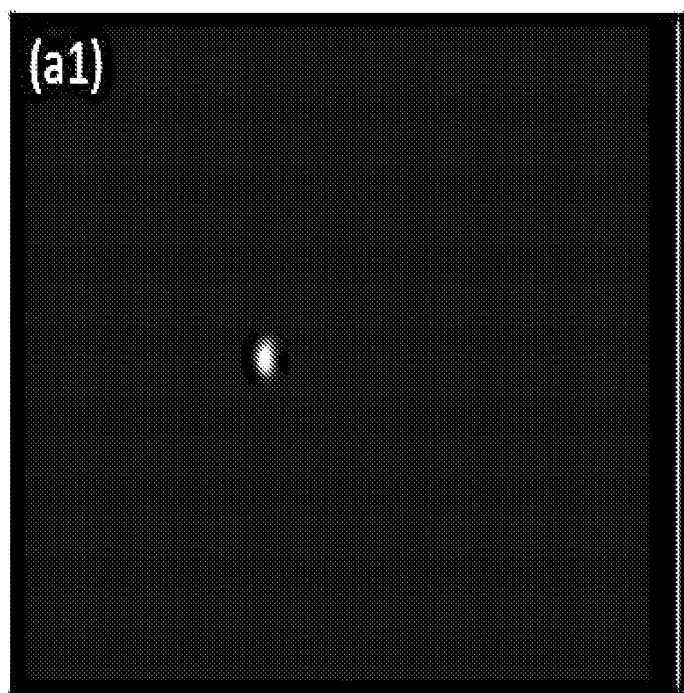


500 nm 80,000X 5.00kV

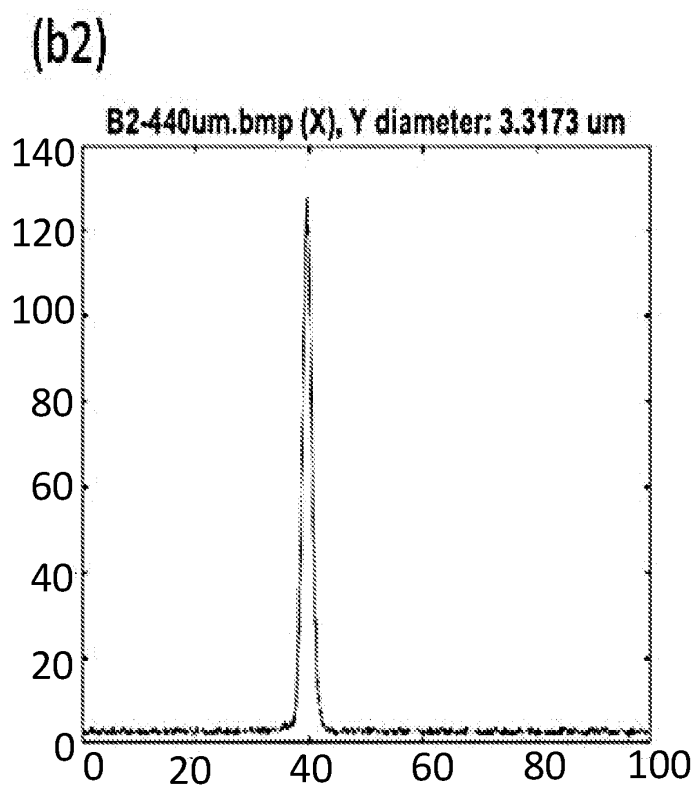
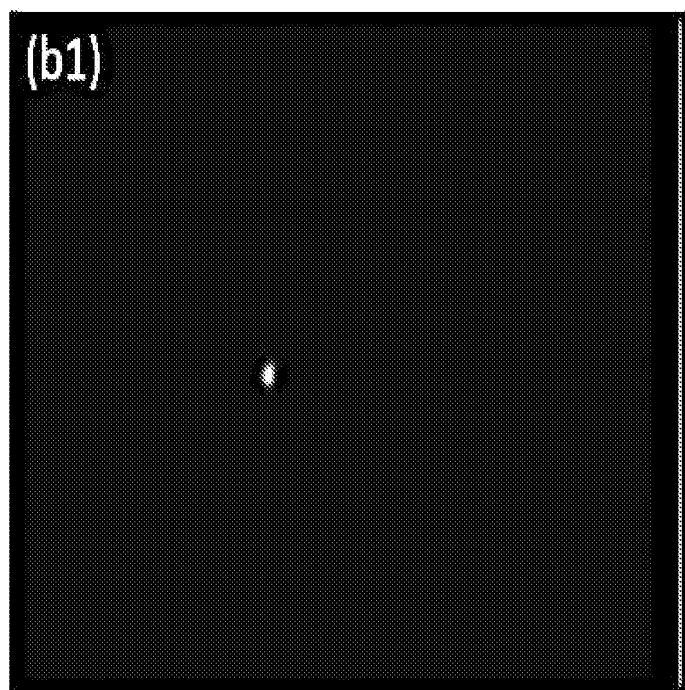
FIG. 14



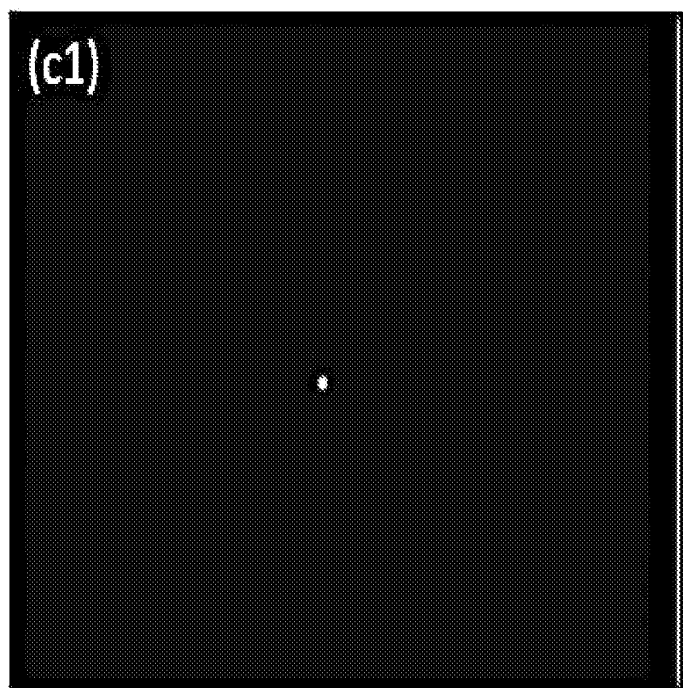
24/30

FIG. 15A

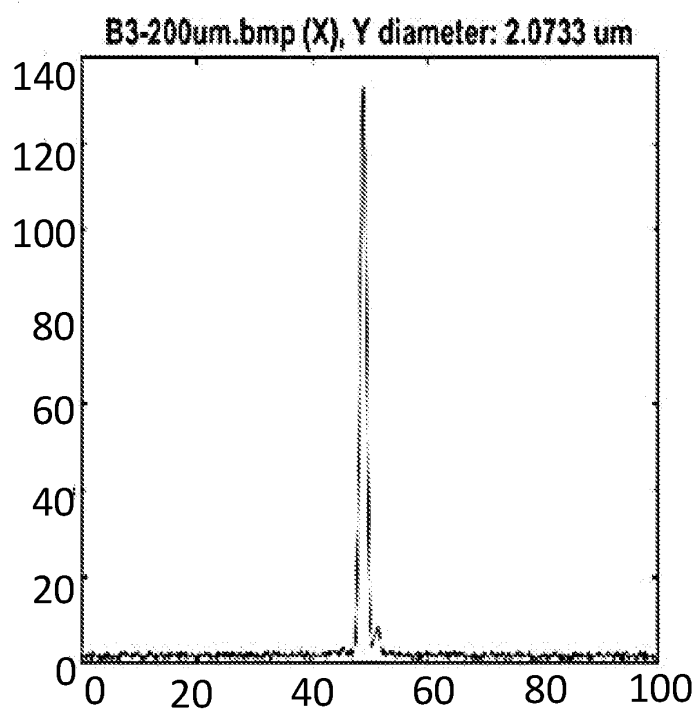
25/30

FIG. 15B

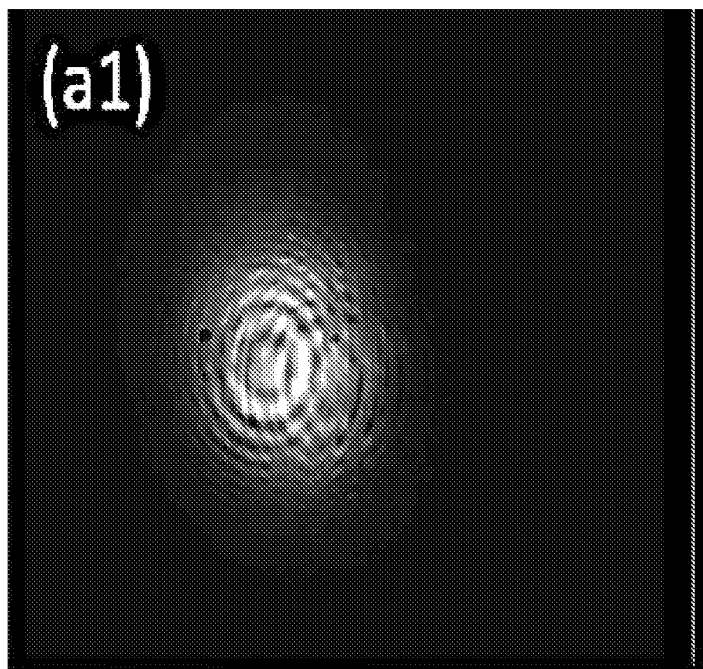
26/30

FIG. 15C

(c2)



27/30

FIG. 16A

(a2)

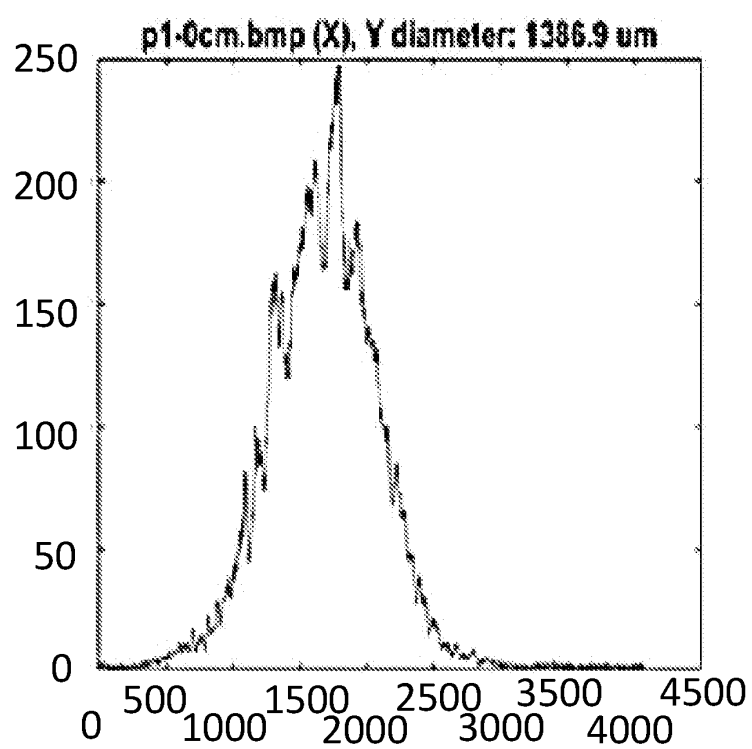
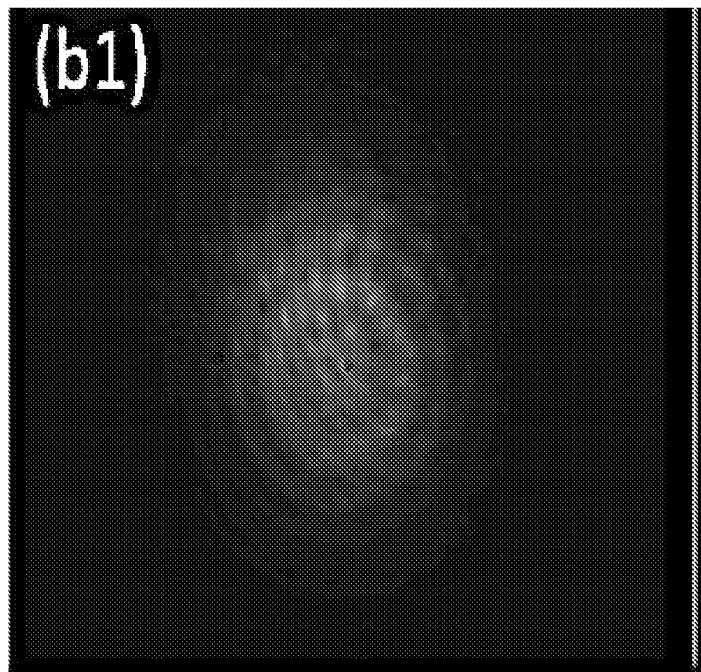
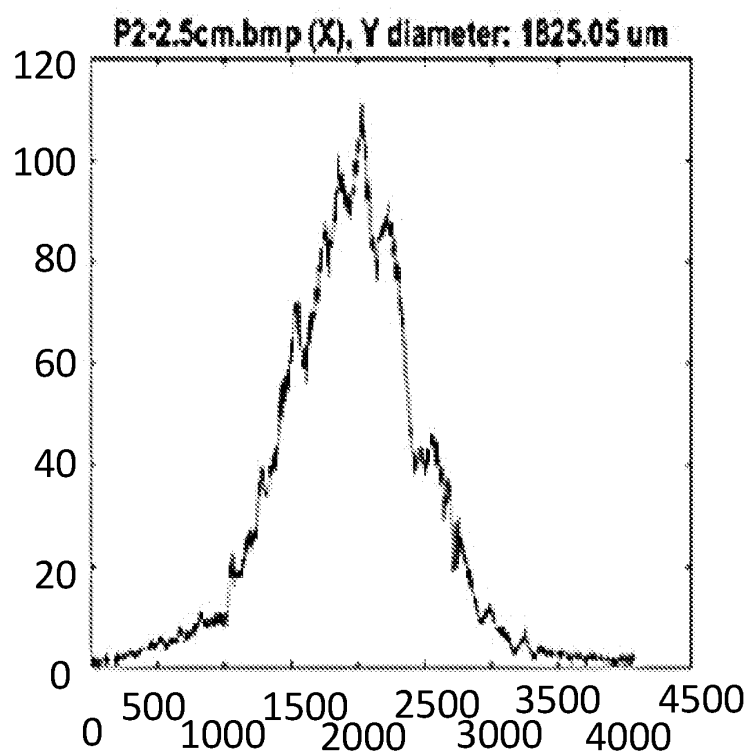
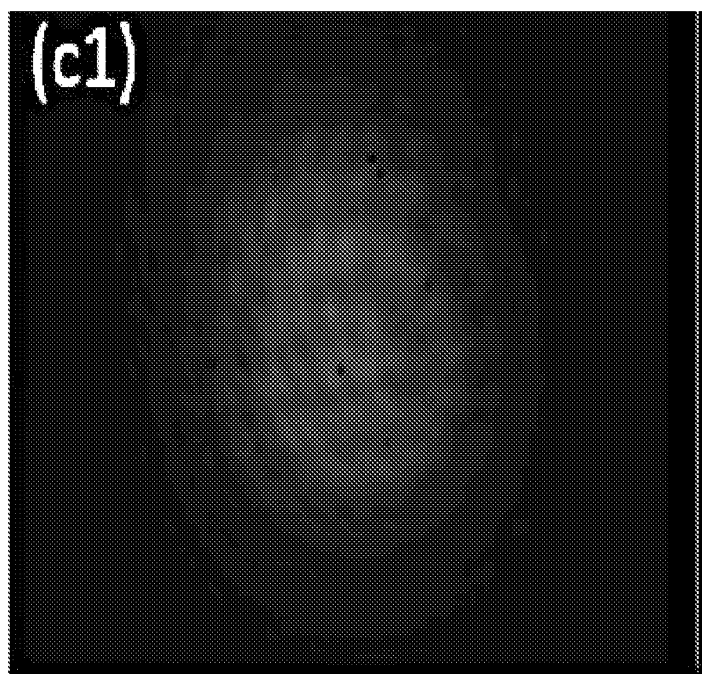


FIG. 16B

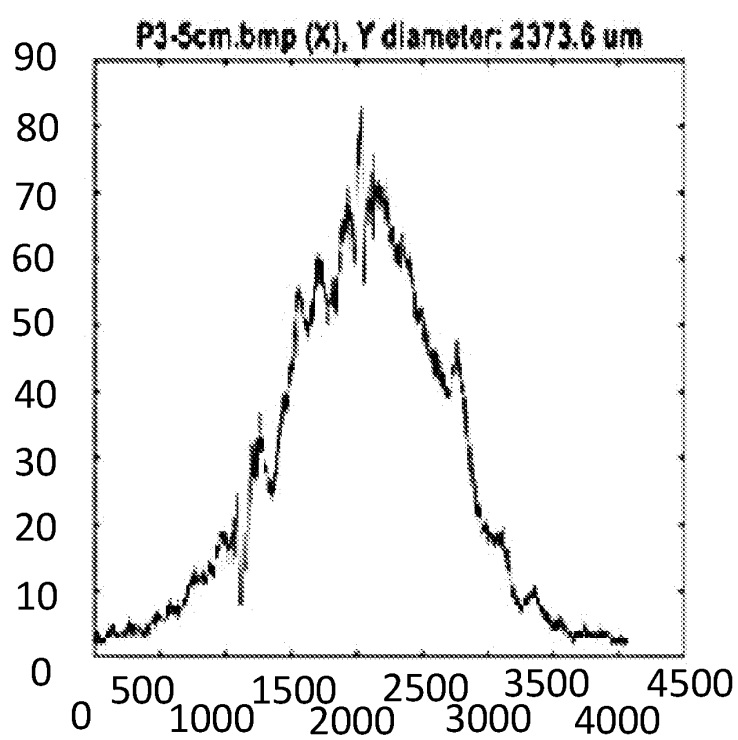
(b2)



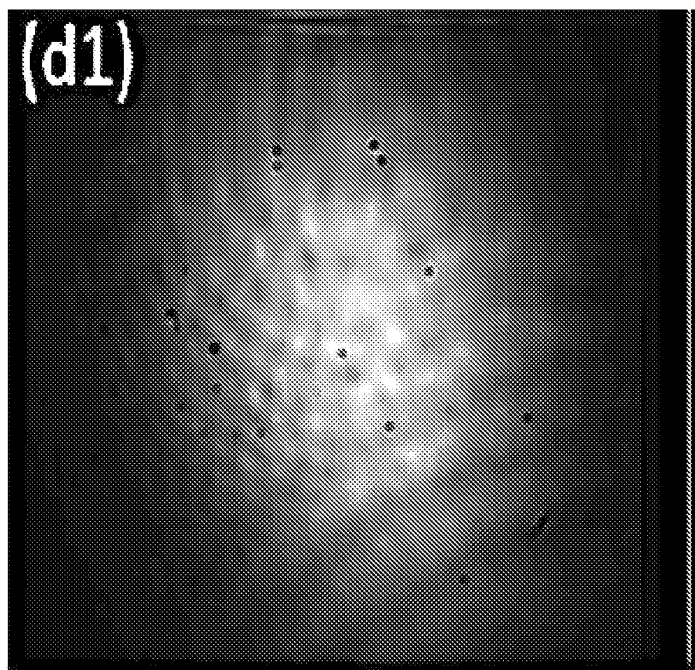
29/30

FIG. 16C

(c2)



30/30

FIG. 16D

(d2)

