



G00001



(43) International Publication Date
28 February 2002 (28.02.2002)

PCT

(10) International Publication Number
WO 02/15967 A1

(51) International Patent Classification⁷: A61M 5/44

(74) **Agent: VAN BREDA, Jacques;** Octrooibureau Los en Stigter B.V., Weteringschans 96, NL-1017 XS Amsterdam (NL).

(21) International Application Number: PCT/NL01/00596

(22) International Filing Date: 10 August 2001 (10.08.2001)

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1015999 23 August 2000 (23.08.2000) NL

(71) Applicant (for all designated States except US): A.J. VAN LIEBERGEN HOLDING B.V. [NL/NL]; Rietspinner 11, NL-3831 DP Leusden (NL).

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) **Inventors/Applicants (for US only): BOUHUIJS, Menno, Cornelis** [NL/NL], Einstraat 89, NL-7556 TV Hengelo (NL). **RUTGERS, Petrus, Theodorus** [NL/NL]; Westermaatsweg 9, NL-7556 BW Hengelo (NL).

Published:

— with international search report

[Continued on next page]

54) Title: APPARATUS FOR HEATING BLOOD OR ANOTHER PHYSIOLOGICAL FLUID

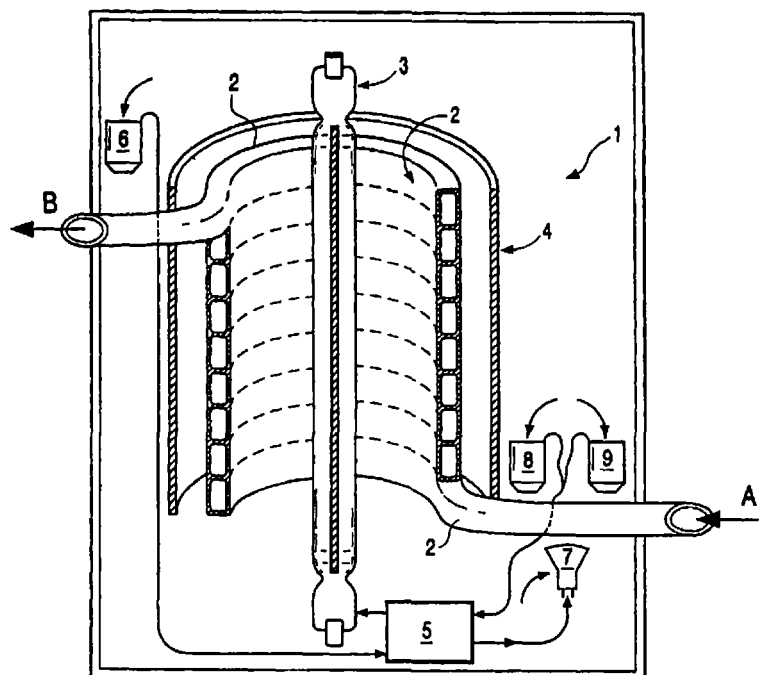

(57) Abstract: The invention relates to an apparatus for warming blood or other physiological fluids, comprising a conduit through which the fluid can be conducted, and heating means for warming the fluid flowing through the conduit, the heating means comprising at least one source of infrared radiation, and the conduit being at least partly transparent to the radiation emitted by the infrared source during operation