




- (51) International Patent Classification:
E21B 33/04 (2006.01) *E21B 33/038* (2006.01)
E21B 33/076 (2006.01)
- (21) International Application Number:
PCT/US2013/035001
- (22) International Filing Date:
2 April 2013 (02.04.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/437,511 2 April 2012 (02.04.2012) US
- (71) Applicant: CAMERON INTERNATIONAL CORPORATION [US/US]; 1333 West Loop South, Suite 1700, Houston, Texas 77027 (US).
- (72) Inventors: GILMORE, David, L.; 4646 West Sam Houston Parkway North, Houston, Texas 77041 (US). WALKER, Stephen, J.; 4646 Sam Houston Parkway, North, Houston, Texas 77041 (US).
- (74) Agent: ROSE, Collin, A.; Chamberlain, Hrdlicka, White, Williams & Aughtry, 1200 Smith Street, 14th Floor, Houston, Texas 77002 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: SEAL SUB SYSTEM

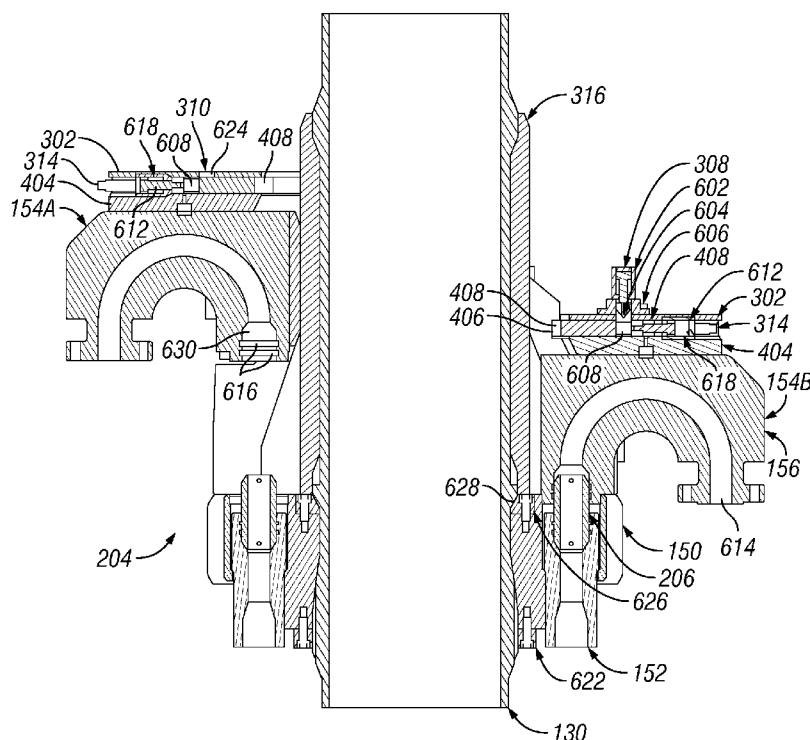

(57) Abstract: A seal sub system for the connection of fluid lines, including first and second fluid lines, each including a terminal end with an inner diameter. A seal sub includes an inner channel and first and second pin ends, one pin end removably insertable in the fluid line terminal end with the other pin end extending from the fluid line terminal end. A seal forms a seal between the seal sub and the inner diameter of the first fluid line terminal end. The extending pin end is configured to be inserted into the terminal end of the second fluid line to establish a sealed fluid connection between the first and second fluid lines.

WO 2013/152029 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*