

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 August 2003 (21.08.2003)

PCT

(10) International Publication Number
WO 03/069093 A1

(51) International Patent Classification⁷: **E04F 15/04**

(21) International Application Number: PCT/BE03/00026

(22) International Filing Date: 14 February 2003 (14.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002/0095 14 February 2002 (14.02.2002) BE

(71) Applicant (*for all designated States except US*):
HOUTHANDEL WOUTERS NV [BE/BE]; Zieren-
bosstraat, 2, B-2300 Turnhout (BE).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **TEUWEN, Erik**
[BE/BE]; Ezaartveld, 129, B-2400 Mol (BE).

(74) Agents: **QUINTELIER, Claude** et al.; Gevers & Vander
Haeghen, Holidaystraat 5, B-1831 Diegem (BE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FLOOR ELEMENT

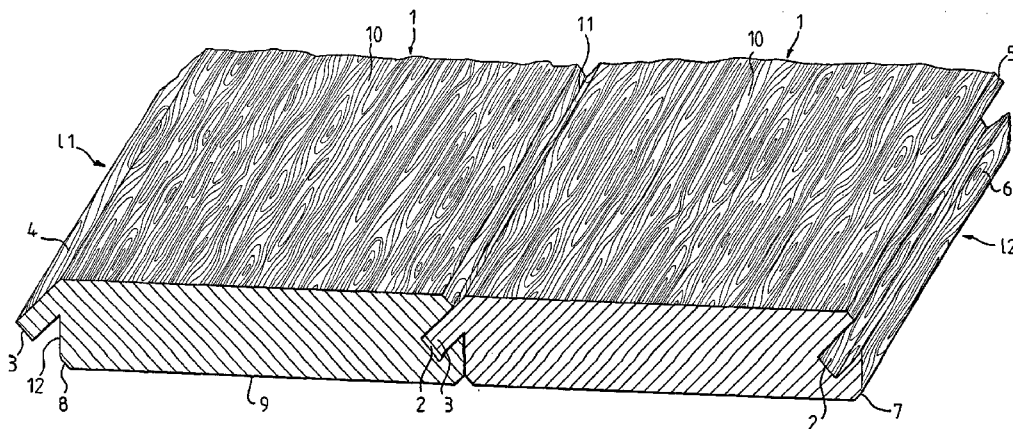

(57) **Abstract:** A floor element, in particular a wooden floor element, comprising a top and a bottom surface as well as a first and a second lateral side, said first side being provided with a tooth integrally formed with said floor element, said second side being provided with a groove, said tooth and said groove extend substantially over a whole length of lateral sides and are dimensioned in such a manner, that for adjacently placed floor elements the tooth of the one floor element and the groove of the other floor element mutually engage for providing a toothed engagement, and wherein said tooth starts from said top surface and is inclined over an angle situated between 20 and 70°, preferably between 35 and 55° with respect to said top surface, said tooth having a length measured as from said top surface of at least one third of the thickness of said floor element.



WO 03/069093 A1