

THIS SHEET HAS BEEN
REPLACEDFIELD OF THE INVENTION AND RELATED ART

The present invention relates to a laminate film for receiving a toner image and a method for forming a fixed toner image on a laminate film, particularly a laminate film for receiving a color or full-color toner image according to an electrophotographic system and a method forming a fixed toner image of a color or full color on such a laminate film.

Conventionally, a full-color image has been formed generally in the following manner.

A photoconductive layer of a photosensitive drum as an electrostatic latent image holding member is uniformly charged by a primary charger and exposed imagewise to laser light modulated by a magenta image signal of an original to form an electrostatic latent image on the photosensitive drum, which is then developed with a magenta toner contained in a magenta developing unit to form a magenta toner image. The thus formed magenta toner image on the photosensitive drum is transferred by a transfer charger to a recording medium conveyed thereto.

On the other hand, the photosensitive drum after the transfer of the toner image to the recording medium is discharged (charge-removed) by a discharger, cleaned by a cleaning means and again charged by a primary charger, followed by similar formation of a cyan toner image and transfer of the cyan toner image to the recording member already carrying the above-mentioned magenta toner image. Then, similar operations are repeated for yellow and black colors so that toner image in totally four colors of magenta, cyan, yellow and black are transferred to the recording medium. Then, the recording medium having the four colors of toner images is supplied to fixing rollers where the toner images are fixed under the action of heat and pressure to form a fixed full-color toner image on the recording medium.

A toner used in a method of forming such a fixed color toner image is required to show excellent meltability on heating and color-mixing characteristic and is further preferred to show a low softening point and a low melt viscosity with a highly sharp-melting characteristic.

By using such a sharply melting toner, it is possible to obtain a color copy which shows excellent color reproducibility and is highly faithful to an original image.

However, such a sharply melting toner tends to have a high affinity with fixing rollers and is liable to cause offsetting onto a fixing roller.

Particularly, in the case of a fixing means for use in full-color toner image formation, a plurality of toner layers including those of magenta, cyan, yellow and black, such offsetting is particularly liable to be caused.

For the above reason, it has been conventionally practiced to apply a release agent such as silicone oil onto a fixing roller so as to enhance the toner releasability of the fixing roller. In this case, however, the following problems are accompanied.

As a release agent such as oil is applied onto a fixing roller, the entire apparatus becomes complicated, and the life of the fixing roller can be shortened by the oil application.

On the other hand, as one of various demands for copying in recent years, a resinous laminate film such as a transparency film for an overhead projector (OHP) has been widely used as a type of recording material. If a toner image is fixed onto such a laminate film by using a fixing method using such an oil as described above, the applied oil is attached to the surface of the laminate film to remarkably deteriorate the quality of the laminate film for carrying the resultant toner image.

Accordingly, there are an increasing demand for a fixing system without requiring such oil application at the time of fixing and a novel toner for realizing such a fixing system.

For the above-mentioned problems, there have been proposed a toner produced containing a release agent such as wax and a toner by suspension polymerization (Japanese Patent Publication (JP-B) 36-10231). In the suspension polymerization, a polymerizable monomer and a colorant (and also a polymerization initiator, a crosslinking agent, a charge control agent and other additives, as desired) are uniformly dissolved or dispersed to form a monomer composition, which is then dispersed in a dispersion medium (e.g., aqueous medium) containing a dispersion stabilizer by using an appropriate stirrer and simultaneously subjected to polymerization to form toner particles having a desired particle size.

In the suspension polymerization system, liquid droplets of the monomer composition are formed in a dispersion medium having a large polarity such as water, components having a polar group contained in the monomer composition tend to be present at the surfaces constituting an interface with the aqueous phase and non-polar components tend to be less present at the surface parts to form a so-called pseudo-capsule structure. By utilizing this process characteristic, it is possible to incorporate in a toner a low-melting point wax which cannot be used in another toner production process, such as the pulverization process.

Such a toner obtained by the polymerization process can satisfy both anti-blocking characteristic and low-temperature fixability which are generally contradictory with each other owing to the enclosure of a low-melting point wax. More specifically, the enclosed low-melting point wax does not lower the anti-blocking

characteristic but promotes the internal thermal conductivity of the toner to realize low-temperature fixation. As a further preferable aspect, the wax melted at the time of fixation functions also as a release agent, so that undesirable high-temperature offset can be prevented without applying a release agent such as oil onto a fixing roller.

5 Thus, the polymerization toner enclosing wax shows advantageous performances at the time of fixation but has caused new problems when it is used in combination with a laminate film as the recording medium, that the clarity or transparency of the resultant image after the fixation is somewhat lowered and the enclosed wax as a release agent exudes at the time of fixing to flow onto the image. More specifically, the wax enclosed within the toner is caused to melt under the action of pressure and heat at the time of fixation
10 and, as shown in Figure 8, is caused to flow on a resinous laminate film R as a recording medium to the rear side with respect to the direction of progress P of the film, thus resulting in a flowout or exudation trace W of wax at the rear end of a fixed image I which is thus made awkward as an image for use in an OHP.

It may be conceived of decreasing the wax in order to prevent such wax flow but this results in a lower releasability of the toner. Thus, the above difficulty has been inevitably encountered if wax is used in an
15 amount to provide a sufficient release characteristic.

This wax flow phenomenon is particularly noticeably observed in the case of resinous recording material such as an OHP film. This may be attributable to a fact that such a resinous recording medium shows a poor ability of absorbing melted wax to allow the wax to remain on the surface thereof and flow out to the image unlike a recording medium such as paper which has an abundant absorptivity sufficient to
20 absorb melted wax to prevent the above-mentioned problems leading to deterioration of image quality.

Further, in the case of forming a fixed toner image on a recording medium such as a resinous laminate film, it has been generally frequently practiced to use a lower fixing speed for sufficient toner melting than fixation on an ordinary recording material such as paper as it is strongly desired to form a toner image having a high optical transmittance.

25 In this case, however, the toner on the recording medium is more liable to be offset to the fixing roller at the time of fixation, so that a larger amount of wax is required to be enclosed within the toner in order to show a sufficient releasability than in the case of fixation of a toner image on a recording medium such as paper.

Further, it has been confirmed that the use of a toner image by using such a toner enclosing wax rather
30 results in a decrease in clarity of the resultant transparency film due to opacification caused by crystallization of the wax per se. This is presumably because the wax enclosed within the toner layer on a recording medium is caused to exude out of the toner at the time of passing between the fixing rollers to cover the whole or a part of the toner image and have an increased crystallinity, thus causing a remarkably lower optical transmittance.

35 Accordingly, it is urgently desired to exercise a measure by which a sufficient amount of wax can be contained without impairing the clarity of the resultant image and without causing a trace of wax flow even on a recording medium such as a resinous laminate film.

Further, in the case of forming a color or full-color toner image on a transparent laminate film by using an electrophotographic system of the dry development type and projecting the toner image onto a screen
40 by means of an OHP apparatus, the projected image can show a grayish tint as a whole to result in a very narrow range of color reproduction even when the image on the film shows a sufficient color reproducibility. This phenomenon is caused because the yet-unfixed toner image on a smooth laminate film is not provided with a sufficient fluidity by the heating at the time of fixation to retain its particle characteristic and the light incident to the toner image at the time of the projection is scattered to form a shadow on the screen.
45 Particularly, at a halftone part showing a low image density, the absorption level by the dye or pigment in the toner is lowered due to a decrease in number of toner particles and the resultant absorption level becomes identical to a black absorption level due to scattering by toner particles, so that the reproduced color tint becomes grayish.

In the case of naked eye observation of a toner image on a recording medium such as plain paper, a
50 light image reflected from an illuminated fixed toner image is observed, so that the image quality is little affected even if the toner surface retains some particle characteristic. In the case of observing or projecting a toner image onto a screen by transmitted light as in an OHP apparatus, the image quality based on transmittance is remarkably impaired due to light scattering if the toner image retains some toner particle shape. Accordingly, the recording medium for use in an OHP apparatus is required to provide a fixed toner
55 image which retains less particle characteristic and shows an improved optical transmittance while preventing an offset phenomenon onto the fixing roller at the time of fixation.

SUMMARY OF THE INVENTION

1 This Sheet Has Been Replaced





An object of the present invention is to provide a laminate film for receiving the toner image having solved the above-mentioned problems and also a method for forming a fixed toner image on such a laminate film.

5 An object of the present invention is to provide a laminate film capable of forming a fixed toner image of excellent quality thereon without using oil at the time of fixation and a method for forming a fixed toner image on such a laminate film.

An object of the present invention is to provide a laminate film capable of providing a fixed toner image with an excellent clarity or transparency and a method for forming a fixed toner image on such a laminate film.

10 Another object of the present invention is to provide a laminate film capable of forming thereon a fixed toner image of excellent quality while preventing flowout of a wax component contained in a toner at the time of fixation and a method for forming a toner image on such a laminate film.

A further object of the present invention is to provide a laminate film capable of forming thereon a fixed toner image which provides a color or full-color projected image with good color reproducibility and free from graying in tint as a whole, and a method for forming a fixed toner image on such a laminate film.

15 A still further object of the present invention is to provide a laminate film capable of forming a toner image thereon with excellent performance of preventing toner offset onto a fixing means at the time of fixation, and also a method for forming a fixed toner image on such a laminate film.

20 According to a principal aspect of the present invention, there is provided a laminate film for receiving a toner image containing a wax component, comprising: an absorbing layer for absorbing the wax component, and a substrate supporting the absorbing layer.

According to another aspect of the present invention, there is provided a method for forming a fixed toner image on a laminate film, comprising:

25 a developing step for developing an electrostatic latent image on an electrostatic image-bearing member with a toner containing a wax component to form a toner image on the electrostatic image-bearing member;

a transfer step for transferring the toner image onto the laminate film, the laminate film comprising an absorbing layer for absorbing the wax component in the toner and a substrate supporting the absorbing layer; and

30 a fixing step for fixing the toner image onto the laminate film under heat and pressure while absorbing the wax component in the toner with the absorbing layer of the laminate film.

These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings.

35 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a sectional view showing an embodiment of the laminate film according to the present invention.

40 Figures 2 - 5 are respectively a sectional view showing another embodiment of the laminate film according to the present invention.

Figure 6 is a graph for illustrating a melting characteristic of a toner relating to the present invention.

Figure 7 is a schematic view of an image forming apparatus to which the laminate film according to the present invention is applicable and which is applicable for practicing an embodiment of the image forming method according to the present invention.

45 Figure 8 is a plan view for explaining a problem of wax flowout encountered when a fixed toner image is formed by using a conventional laminate film.

DETAILED DESCRIPTION OF THE INVENTION

50 The laminate film according to the present invention is characterized by having an absorbing layer for absorbing a wax component contained in a toner.

The absorbing layer may be formed by containing inorganic fine particles. The absorptivity of the wax component into the absorbing layer is related with an average pore radius (D) of the absorbing layer or by the inorganic fine powder per se, which is preferably in the range of 10 - 200 Å. Outside the average pore radius (D) range of 10 - 200 Å, the wax absorptivity is lowered.

The absorbing layer may preferably have a thickness in the range of 0.1 - 10 microns, more preferably 0.5 - 5 microns. If the thickness is below 0.1 micron, the wax absorptivity becomes insufficient and, if the



thickness exceeds 5 microns, the laminate film is liable to be turbid to result in a lower transmittance.

The laminate film according to the present invention may preferably have a specific surface area of 0.1 - 30 m²/g which is generally attributable to that of the absorbing layer and the contribution of the base film is generally negligible. If the specific surface area of the laminate film is below 0.1 m²/g, the wax absorptivity of the absorbing layer becomes insufficient. If the specific surface area exceeds 30 m²/g, the transparency of the laminate film is lowered and most of the wax component contained in the toner is absorbed by the laminate film, thus failing to exhibit the intended release effect.

The average pore diameter of the inorganic fine powder or the absorbing layer and the specific surface area of the laminate film may be measured through nitrogen absorption according to the constant volume method and calculated based on the Kelvin formula and BET theory. The values described herein are values measured by using a commercially available gas absorption meter ("Autosorb 1", available from Yuasa Ionic K.K.). For measurement of the specific surface area of the laminate film, a laminate film sample measuring 100 mm x 100 mm is cut into pieces each measuring 5 x 5 mm, and all the cut pieces are placed in the gas absorption meter.

The structure of the laminate film according to the present invention will be described with reference to Figure 1.

Referring to Figure 1, a laminate film according to the present invention comprises a base film A of a transparent resin as a substrate and an absorbing layer B formed on the base film A. The base film A is required to have a heat resistance so as not to cause a noticeable thermal deformation due to heating for heat fixation or heat and pressure fixation. More specifically, the base film A may preferably have a heat distortion temperature of 145 °C or higher, more preferably 150 °C or higher, as measured under the condition of 4.6 Kg/cm² according to ASTM D648. Specific examples of such a base film A may include films of polyethylene terephthalate (PET), polyester, polyamide and polyimide showing a heat resistance represented by a heat distortion temperature of 145 °C or higher under the above condition and a maximum usable temperature of 100 °C or higher. Among these, polyethylene terephthalate film is particularly preferred in view of its heat resistance and transparency. The base film is required to have a thickness not causing wrinkles even when softened under heating for fixation. A thickness of 50 microns or more is sufficient, e.g., in case of polyethylene terephthalate. Even a transparent film can cause a lowering in transmittance if it becomes excessively thick. For these reasons, the base film A may preferably have a thickness of 50 - 300 microns, more preferably 100 - 200 microns, further preferably 70 - 150 microns.

Referring to Figure 1, the absorbing layer B may be formed by application or adhesion of inorganic fine powder on the base film so as to provide fine pores.

The inorganic fine powder may for example comprise activated alumina, aluminum hydroxide, hydrated alumina, silica and titanium oxide. These materials may be used singly or in mixture of two or more species.

The inorganic fine powder may preferably have an average primary particle size of 0.001 - 0.1 micron, more preferably 0.001 - 0.05 micron. If the particle size is below 0.001 micron, the cohesive force between particles becomes too large to form a uniform absorbing layer and, if the particle size exceeds 0.1 micron, the wax absorptivity or transparency of the absorbing layer is impaired.

The absorbing layer B may for example be formed on the absorbing layer A by dispersing such an inorganic fine powder in an appropriate solvent together with an appropriate binder, as desired, to form a coating liquid and applying the coating liquid onto the base film A by known coating methods, followed by drying.

The solvent can have a solubility of slightly dissolving the surface of the base film A or the inorganic fine powder.

Examples of the binder may include known film-forming resins, such as polyester resins, vinyl resin, butadiene resins, epoxy resins, polyamide resins and polyurethane resins.

The binder resin and the inorganic fine powder may be used in a weight ratio of 1:1 - 1:50, more preferably 1:3 - 1:20.

The absorbing layer B can also be formed by coating the base film A with a layer of the inorganic fine particles by known deposition methods such as CVD (chemical vapor deposition) and PVD (physical vapor deposition).

In order to enhance the adhesion between the base film A and the inorganic fine powder or binder resin, it is possible and preferred to apply a surface treatment such as plasma or corona discharge, or a primer layer to the base film A.

Explanation is made on a polymerization toner as a preferred example of a toner used in combination with the laminate film according to the present invention. Such a polymerization toner may be produced in the following manner.



Additives such as a release agent, a colorant and a charge control agent are added in a polymerizable monomer, and the mixture is heated until the release agent is dissolved or melted and is subjected to uniform dissolution or dispersion by using a mixer such as a homogenizer or an ultrasonic disperser to form a monomer composition, which is then dispersed in an aqueous medium containing a dispersion stabilizer at a temperature nearly equal to that of the monomer composition by using a mixer, such as an ordinary stirrer. The stirring speed and time are preferably adjusted so as to provide the resultant monomer droplets with a prescribed toner size of generally 30 microns or smaller, and thereafter the stirring is continued at such an intensity as to retain the particle size and prevent the precipitation of the particles under the action of a dispersion stabilizer. The polymerization temperature is set to a temperature below the precipitation temperature of the release agent, and a polymerization initiator is added to effect the polymerization. After the reaction, the produced toner particles are washed, recovered by filtration and dried. In the suspension polymerization, it is generally preferred to use 300 - 3000 wt. parts of water as a dispersion medium per 100 wt. parts of the monomer composition.

Examples of the polymerizable monomer usable for constituting the polymerization toner may include: styrene-type monomers, such as styrene, o-methylstyrene, m-methylstyrene, p-methylstyrene, p-methoxystyrene, and p-ethylstyrene; acrylates, such as methyl acrylate, ethyl acrylate, n-butyl acrylate, isobutyl acrylate, n-propyl acrylate, n-octyl acrylate, dodecyl acrylate, 2-ethylhexyl acrylate, stearyl acrylate, 2-chloroethyl acrylate and phenyl acrylate; methacrylates, such as methyl methacrylate, ethyl methacrylate, n-propyl methacrylate, n-butyl methacrylate, isobutyl methacrylate, n-octyl methacrylate, dodecyl methacrylate, 2-ethylhexyl methacrylate, stearyl methacrylate, phenyl methacrylate, dimethylaminoethyl methacrylate, and diethylaminoethyl methacrylate; acrylonitrile, methacrylonitrile, and acryl amide.

These monomers may be used singly or in mixture of two or more species. Among the above monomers, styrene or a styrene derivative may preferably be used singly or in mixture with another monomer in view of developing characteristics and successive image forming characteristics of the resultant toner.

The dispersion medium for producing the polymerization toner may be formed by dispersing a stabilizer, such as polyvinyl alcohol, gelatin, methyl cellulose, methyl hydroxypropyl cellulose, ethyl cellulose, sodium salt of carboxymethyl cellulose, polyacrylic acid or its salt, starch, calcium phosphate, aluminum hydroxide, magnesium hydroxide, calcium metasilicate, barium sulfate or bentonite in an aqueous medium. The stabilizer may preferably be used in an amount of 0.2 - 20 wt. parts per 100 wt. parts of the polymerizable monomer.

In order to finely disperse such a stabilizer, 0.001 - 0.1 wt. part of a surfactant may be used. The surfactant functions to promote the action of the dispersion stabilizer, and examples thereof may include: sodium dodecylbenzenesulfonate, sodium tetradecyl sulfate, sodium pentadecyl sulfate, sodium octyl sulfate, sodium oleate, sodium laurate, potassium stearate, and calcium oleate.

It is further preferred to add a polymer or copolymer having a polar group in the monomer composition for polymerization. Further, it is preferred in the present invention that a monomer composition to which a polymer, copolymer or cyclic rubber having a polar group has been added is suspended for polymerization in an aqueous medium which contains a dispersant chargeable to a polarity reverse to that of the polar polymer, etc. More specifically, a cationic (or anionic) polymer, copolymer or cyclic rubber contained in the monomer composition exerts an electrostatic attraction force at the surfaces of droplets of the monomer composition under polymerization with an anionic (or cationic) dispersant of the reverse chargeability, so that the surfaces of the droplets are covered with the dispersant to prevent the coalescence of the droplets and stabilize the dispersion, and the added polar polymer, etc., are caused to gather at the surfaces of the droplets to form a kind of shell, thus providing toner particles of a pseudo-capsule structure. A toner satisfying both fixability and anti-blocking characteristic which are generally contradictory with each other can be obtained by forming a shell of a polar polymer (or copolymer or cyclic rubber) having a relatively high molecular weight so as to provide excellent anti-blocking and anti-offset characteristic and a core of a component having a relatively low molecular weight contributing to an improved fixability through the polymerization. Examples of the polar polymer or copolymer and the reversely chargeable dispersant may be enumerated below:

(1) Cationic polymers or copolymers, inclusive of: homopolymers of a nitrogen-containing monomer, such as dimethylaminoethyl methacrylate or diethylaminoethyl methacrylate, and copolymers of such a nitrogen-containing monomer with another monomer, such as styrene or an unsaturated carboxylic acid ester.

(1) Anionic polymers or copolymers, inclusive of: homopolymers of a nitrile monomer such as acrylonitrile, a halogen-containing monomer such as vinyl chloride, an unsaturated carboxylic acid such as acrylic acid or methacrylic acid, an unsaturated dibasic acid, an unsaturated dibasic acid anhydride,



and a nitro group-containing monomer, and also copolymers of these monomers with a styrene-type monomer.

Cyclic rubber can be used instead of the above-mentioned polar polymer or copolymer.

(3) Anionic dispersants including silica fine powder, particularly colloidal silica having a BET specific surface area of 200 m²/g or larger.

(4) Cationic dispersants including hydrophilic positively chargeable silica fine powder, such as aminoalkyl-modified colloidal silica, preferably having a BET specific surface area of 200 m²/g or larger, and aluminum hydroxide.

Such a dispersant may preferably be used in a proportion of 0.2 - 20 wt. parts, particularly 0.3 - 15 wt. parts, per 100 wt. parts of the polymerizable monomer composition.

In the present invention, it is preferred to incorporate a charge control agent in the toner to control the chargeability of the toner. The charge control agent may be those having little polymerization inhibiting characteristic and little transferability to an aqueous medium selected from known charge control agents. Examples of positive charge control agents may include: nigrosine dyes, triphenylmethane dyes, quaternary ammonium salts, amine compounds and polyamine compounds. Examples of negative charge control agents may include: metal-containing salicylic acid compounds, metal-containing monoazo dye compounds, styrene-acrylic acid copolymer, and styrene-methacrylic acid copolymer.

The colorant contained in the toner used in the present invention may be known ones. Examples thereof may include: carbon black; iron black; dyes, such as C.I. Direct Red 1, C.I. Direct Red 4, C.I. Acid Red 1, C.I. Basic Red 1, C.I. Mordant Red 30, C.I. Solvent Red 49, C.I. Solvent Red 52, C.I. Direct Blue 1, C.I. Direct Blue 2, C.I. Acid Blue 9, C.I. Acid Blue 15, C.I. Basic Blue 3, C.I. Basic Blue 5, C.I. Mordant Blue 7, C.I. Direct Green 6, C.I. Basic Green 4, and C.I. Basic Green 6; and pigments, such as Lead Yellow, Cadmium Yellow, Mineral Fast Yellow, Navel Yellow, Naphthol Yellow S, Hansa Yellow G, Permanent Yellow NCG, Turtladine Lake, Molybdenum Orange, Permanent Orange GTR, Benzidine Orange G, Cadmium Red, Permanent Red 4R, Watching Red Ca-salt, Brilliant Carmine 3B, Fast Violet B, Methyl Violet Lake, Ultramarine, Cobalt Blue, Alkali Blue Lake, Victoria Blue Lake, quinacridone, disazo-type yellow pigments, Phthalocyanine Blue, Fast Sky Blue, Pigment Green B, Malachite Green Lake, and Final Yellow Green G. When the toner is produced by polymerisation, it is necessary to pay attention to the polymerization prohibiting property and transferability to water of a colorant used. For this reason, it is preferred to apply to the colorant used a surface treatment, such as a hydrophobicity-imparting treatment with a substance free from polymerization-inhibiting characteristic.

Examples of the wax contained as a release agent in the toner used in the present invention may include: paraffin-type waxes, polyolefin-type waxes and modified products (e.g., oxidation or grafting products) of these, higher fatty acids and their metal salts and amide wax, but these are not exhaustive.

The wax used in the present invention may preferably have a melting point in the range of 30 - 150 °C, more preferably 40 - 140 °C. If the melting point is below 30 °C, the anti-blocking characteristic and shape-retaining characteristic of the resultant toner becomes insufficient. If higher than 150 °C, a sufficient release effect is not exhibited. The melting point herein is one measured as a temperature giving a maximum heat absorption peak on a DSC (differential scanning calorimeter) curve.

The wax used in the present invention may preferably be one showing a melting enthalpy ΔH of 50 - 250 J/g.

Such a wax may preferably be used in a proportion of 0.1 - 50 wt. parts, more preferably 1 - 45 wt. parts, further more preferably 5 - 40 wt. parts, per 100 wt. parts of the polymerizable monomer. Below 0.1 wt. part, little release effect is exhibited. Above 50 wt. parts, the stability in production is lowered, and the anti-blocking characteristic and storage stability are also liable to be lowered.

Examples of the polymerization initiator may include: azo or diazo type polymerization initiators, such as 2,2'-azobis(2,4-dimethylvaleronitrile), 2,2'-azobisisobutyronitrile, 1,1'-azobis(cyclohexane-1-carbonitrile) and 2,2'-azobis-4-methoxy-2,4-dimethylvaleronitrile; and peroxide type polymerization initiators, such as benzoyl peroxide, methyl ethyl ketone peroxide, diisopropyl peroxy carbonate, cumene hydroperoxide, 2,4-dichlorobenzoyl peroxide, and lauroyl peroxide. It is also possible to use a redox type initiator comprising a peroxide as described above and a reducing agent, such as dimethylaniline, a mercaptan, a tertiary amine, an iron (II) salt or sodium sulfite.

The polymerization initiator may be appropriately used so as to provide a desired molecular weight, and the amount thereof in 0.1 - 10 wt. % of the polymerizable monomer may generally be sufficient.

Some further explanation is given to the wax (release agent), polymerization initiator and polymerization temperature.

When a wax having a low melting or softening point, such as paraffin wax, is used, the wax is precipitated from the polymerizable monomer composition at a low temperature, and the polymerization



temperature is lowered correspondingly. In such a case, it is preferred to use an initiator having a short half-life, such as a redox initiator or 2,2'-azobis-4-methoxy-2,4-dimethylvaleronitrile.

1 In the case of using a wax having a high melting or softening point, such as polyolefin wax, it is preferred to use an autoclave for dissolving or melting the wax in the polymerizable monomer composition
5 and use a polymerization initiator, such as 2,2'-azobis(2,4-dimethylvaleronitrile) or dimethyl-2,2'-azobisisobutyrate as the wax has a higher precipitation temperature than in the above-mentioned case of a wax having a low melting point or softening point, such as paraffin wax.

10 In the present invention, it is also possible to use a toner obtained through kneading, pulverization and classification in addition to the above-mentioned polymerization toner. The binder resin for this purpose may
15 be homopolymer or copolymer of the above-mentioned monomers for producing the polymerization toner inclusive of styrene-type monomers and acidic monomers, such as acrylic acid, methacrylic acid and maleic acid and esters thereof, polyester, polysulfonate, polyether, polyurethane, or a mixture of the above resins. Such a so-called pulverization toner may be prepared by mixing and melt-kneading the binder resin with other toner components by using a hot kneading means, such as hot rollers, a kneader or an extruder,
15 followed by mechanical pulverization and classification.

20 In the toner used in the present invention, it is possible to add known additives for imparting various characteristics. Such additives may preferably have a particle size which is 1/10 or less of the volume-average particle size of the resultant toner particles in view of the durability of the resultant toner. The particle size of the additive referred to herein means an average particle size obtained by surface observation of toner
20 particles through an electron microscope. Examples of such additives for imparting various properties may include the following:

- 1) Fluidity-imparting agent: metal oxides (such as silicon oxide, aluminum oxide, and titanium oxide), carbon black, fluorinated carbon. It is preferred that these have been subjected to a hydrophobicity-imparting treatment.
- 25 2) Abrasive: metal oxides (such as strontium titanate, cerium oxide, aluminum oxide, magnesium oxide, and chromium oxide), nitrides (such as silicon nitride), carbides (such as silicon carbide), metal salts (such as calcium sulfate, barium sulfate, and calcium carbonate).
- 3) Lubricant: powder of fluorine-containing resin (such as polyvinylidene fluoride and polytetrafluoroethylene), fatty acid metal salts (such as zinc stearate and calcium stearate).
- 30 4) Charge-controlling particles: particles of metal oxides (such as tin oxide, titanium oxide, zinc oxide, silicon oxide, and aluminum oxide), carbon black.

These additives may preferably be added in an amount in the range of 0.1 - 10 wt. parts; more preferably 0.1 - 5 wt. parts, per 100 wt. parts of the toner particles. These additives may be added singly or in combination of two or more species.

35 In the present invention, so as to provide a laminate film having good transmittance and color-reproducibility of the projected image, it is preferred to provide on the surface of a substrate heat-resistant film a layer of a transparent resin which is compatible with a binder resin constituting toner particles used for color image formation and has a thermal fusion characteristic different from that of the toner binder resin.

Figures 2 and 3 illustrate such embodiments.

40 Referring to Figures 2 and 3, each laminate film comprises a transparent base film 31 which is similar to the base film A in the embodiment shown in Figure 1, and thereon a transparent resin layer 32 as described above for improving the transmittance of the fixed color image. It is preferred that the transparent resin layer 32 is compatible with the toner binder resin constituting toner particles forming a color image at the temperature of hot fixation. The compatibility with the toner binder resin means that no boundary is
45 formed between the resin of the transparent resin layer 32 and the toner binder resin in the fixed image. As a measure of selection, it is preferred that the resin of the transparent resin layer 32 has a solubility parameter in the range of ± 1.5 , more preferably ± 1.0 , with solubility parameter of the toner binder resin as the principal toner binder resin (constituting 50 wt. % or more of the whole binder resin). The solubility parameters of various resins are disclosed in many publications inclusive of polymer handbooks. For
50 example, when a polyester resin having a solubility parameter of about 11.0 is used as a principal toner binder resin, the resin of the transparent resin layer 32 may suitably be a thermoplastic resin, such as polyester resin, polymethyl methacrylate resin, epoxy resin, polyurethane resin, vinyl chloride resin or vinyl chloride-vinyl acetate copolymer resin having a solubility parameter of 11.0 ± 1.5 . It is particularly preferred that the resin of the transparent resin layer 32 is composed of a resin of the same species as the principal
55 toner binder resin.

The resin used in the transparent resin layer 32 may preferably have a storage modulus (G') of 1×10^3 - 1×10^6 dyn/cm², more preferably 5×10^3 - 5×10^5 dyn/cm², as measured at 160 °C and a frequency (ω) of 100 rad/sec. If the storage modulus (G') is below 1×10^3 dyn/cm², an offset phenomenon is liable to occur when a

toner image is fixed by a hot pressure roller and the transparent resin layer 32 is liable to be partially peeled off the base film 31 and be damaged. If the storage modulus (G') exceeds 1×10^6 dyn/cm², a toner image is allowed to enter only a very slight degree into the transparent resin layer 32 under fixation by a hot pressure roller, so that the resultant toner image becomes grayish as a whole.

5 The storage modulus (G') values for the resin constituting the transparent resin layer referred to herein are based on values measured by using a mechanical spectrometer ("RMS-800", available from Rheometrics Inc.) under the conditions including a frequency (ω) of 100 rad/sec and an automatically determined strain rate. The transparent resin layer 32 may have a thickness of 3 - 30 microns, preferably 8 - 15 microns, while the optimum thickness can vary depending on the particle size of the toner to be fixed thereon.

10 An absorbing layer B similar to the one in the embodiment shown in Figure 1 may be formed on the transparent resin layer 32 in the same manner as explained with reference to Figure 1.

The embodiment of Figure 3 is similar to the one of Figure 2 except that an adhesive layer 33 is disposed between the base film 31 and the transparent resin layer 32 so as to enhance the adhesion 15 between these layers. The adhesive layer 33 may comprise a resin which is compatible with resins constituting the base film 31 and the transparent resin layer 32, examples of such a resin may include: polyester resin, acrylate resin, methacrylate resin, styrene-acrylate copolymer, and styrene-methacrylate copolymer.

Figures 4 and 5 show other embodiments of the laminate film according to the present invention which 20 correspond to those shown in Figures 2 and 3, respectively, but separate absorbing layers B shown in Figures 2 and 3 are omitted by dispersing the above-mentioned inorganic fine powder in the transparent resin layers to form a transparent resin layer 32B having wax-absorptivity. In these cases, it is preferred that the transparent resin layer 32B is provided with pores having an average pore radius (D) of 10 - 200 Å.

The transparent resin layer 32 or 32B may be formed on the base film 31 by dissolving a resin therefor 25 in a volatile solvent such as alcohols, e.g., methanol and ethanol, and ketones, e.g., methyl ethyl ketone and acetone, and further dispersing the inorganic fine powder therein for the transparent resin layer 32B, and then applying the resultant coating liquid by bar coating, dipping, spraying, and spin coating onto the base film 31, followed by drying. In order to enhance the adhesion between the base film 31 and the transparent resin layer 32 or 32B so as to prevent a toner image from being peeled off the base film 31 or the entire 30 laminate film, the surface of the base film can be processed with plasma or corona discharge in addition to or alternatively with the formation of an adhesive layer 33 (Figure 3 and Figure 5).

Now, a toner used for image formation in combination with the laminate film according to the present invention will be explained.


A toner used in a color electrophotographic apparatus is required to show good melting and color 35 mixing characteristic on heating, a low softening point, a low storage modulus at the fixation temperature and a sharp meltability.

In relation with the laminate film, it is preferred that the toner has a storage modulus which is clearly smaller than the resin constituting the transparent resin layer 32 or 32B. More specifically, the toner may preferably show a storage modulus of 1×10^2 - 1×10^5 dyn/cm², more preferably 5×10^2 - 5×10^4 dyn/cm², so as 40 to provide good compatibility with the transparent resin layer 32 or 32B and color mixing characteristic between toners.

A color copy faithful to an original multi-color or full-color image can be formed and a color reproduction range is enlarged by using sharp melting toners.

It is particularly preferred to use a toner comprising a polyester resin as a binder resin in combination 45 with the laminate film according to the present invention, in view of fixation and sharp melting characteristics. An example of the sharp melting polyester is a polymer having ester linkages in its polymer main chain synthesized from a diol compound and a dicarboxylic acid.

In view of sharp melting characteristics, it is particularly preferred to use a polyester resin, which has been obtained through condensation polymerization of at least a bisphenol derivative represented by the 50 formula:

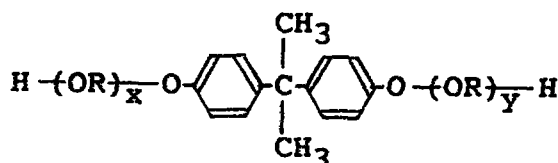



(wherein R denotes ethylene or propylene group, x and y are independently a positive integer of 1 or larger giving an average of $x + y$ in the range of 2 - 10) or a substitution derivative thereof with a carboxylic acid component (such as fumaric acid, maleic acid, maleic anhydride, phthalic acid, terephthalic acid, trimellitic acid and pyromellitic acid) selected from two or more functional carboxylic acids, anhydrides and lower alkyl esters thereof.

Such a polyester resin may preferably have a softening point of 75 - 150 °C, more preferably 80 - 130 °C. The softening characteristic of a toner comprising a polyester resin as a binder resin is shown in Figure 6 as measured according to a method described below.

A toner softening characteristic is represented by a curve of plunger descending distance vs. temperature (softening S-character curve) as shown in Figure 6. A sample toner or resin in an amount of 1 - 3 g accurately weighed is placed on a die having a nozzle diameter of 0.2 mm and a thickness of 1.0 mm and preheated at an initially set temperature of 70 °C for 30 sec and then heated at a constant temperature-raising rate of 6 °C/min. under a plunger having a sectional area of 10 cm² and exerting an extrusion weight of 20 kg. As the temperature is raised at a constant rate, the toner is gradually heated to start flowing (A → B). On further heating, the toner is melted to flow at a large rate (B → C → D) and then the plunger descent is ceased to complete the extrusion (D → E).

The height H of the S-character curve corresponds to the total amount of the flown toner or resin sample, and a temperature at a point C at a height H/2 represents the softening point of the sample.

In relation with the laminate film, it is preferred that the toner or its binder resin shows a storage modulus (G') smaller than that of the resin constituting the transparent resin layer 32 or 32B respectively measured at 160 °C and a frequency of 100 rad/sec. It is preferred that the transparent resin layer 32 or 32B shows a higher modulus than the toner or toner binder resin at a fixing temperature (e.g., 130 - 170 °C). In case where the resin constituting the transparent resin layer 32 or 32B has a storage modulus (G') close to that of the toner binder resin at the fixing temperature, if fixing is performed under such a condition that a portion having two or more colors of toners overlapping with each other and also a portion of a single color toner for producing a full color toner are both fixed to provide a sufficient transparency at a single fixing operation, the transparent resin layer 32 or 32B is also sufficiently heated to lower its viscoelasticity, so that the layer 32 or 32B is liable to be peeled off at the interface with the base film 31 and thus a part of the image can be peeled and taken by the hot fixing roller, thus causing a high temperature offset.

In case where the resin constituting the transparent resin layer 32 or 32B has a storage modulus (G') lower than that of the toner binder resin, a single color toner image can be fixed onto the layer 32 or 32B, but good color mixing is difficult when toner images of different colors are fixed in superposition since the melt viscosity of the transparent resin layer 32 or 32B becomes lower than that of the toner binder resin.

In case where the resin of the transparent resin layer 32 or 32B exceeds 1000 times that of the toner binder resin at a fixing temperature (e.g., 160 °C), a practically acceptable level of transparency is attained for a thin image of a single color but a multi-color or full-color image or a high-density image results in an unevenness due to thickness irregularity of multiple toner layers because the transparent resin layer 32 or 32B does not cause a sufficient degree of deformation as to absorb the thickness irregularity. Thus, the transparency is liable to be impaired. Further, because of a poor adhesiveness between the transparent resin layer 32 or 32B and the toner, a separation can occur within the toner layer to cause an offset.

The thickness of the transparent resin layer 32 or 32B can vary depending on the toner particle size but should be at least 0.5 times the average toner particle size so as to provide a sufficient transmittance to a low density portion having a thickness of only one toner particle. If the thickness exceeds three times the toner particle size, the amount of melting resin becomes large to result in obscure or strained images and also cracking of images due to flexure. The thickness is preferably 0.5 - 2 times the volume-average particle size of the toner.

More specifically, in case of using a toner having a volume-average particle size of 6 microns, it is preferred to use a transparent resin layer 32 or 32B having a thickness of 3- 12 microns and, in case of using a toner having a volume-average particle size of 15 microns, it is preferred to use a transparent resin layer 32 or 32B having a thickness of 7.5 - 30 microns.

The average particle size of a toner is measured by means of a Coulter counter in the present invention, while it may be measured in various manners.

Coulter counter Model TA-II (available from Coulter Electronics Inc.) is used as an instrument for measurement, to which an interface (available from Nikkaki K.K.) for providing a number-basis distribution, and a volume-basis distribution and a personal computer CX-1 (available from Canon K.K.) are connected.

For measurement, a 1 %-NaCl aqueous solution as an electrolytic solution is prepared by using a reagent-grade sodium chloride. For example, ISOTON®-II (available from Coulter Scientific Japan K.K.) may be used therefor. Into 100 to 150 ml of the electrolytic solution, 0.1 to 5 ml of a surfactant, preferably an



alkylbenzenesulfonic acid salt, is added as a dispersant, and 2 to 20 mg of a sample is added thereto. The resultant dispersion of the sample in the electrolytic liquid is subjected to a dispersion treatment for about 1 - 3 minutes by means of an ultrasonic disperser, and then subjected to measurement of particle size distribution in the range of 2 - 40 microns by using the above-mentioned Coulter counter Model TA-II with a 100 micron-aperture to obtain a volume-basis distribution and a number-basis distribution. From the measured particle size distribution, the volume-average particle size of the toner may be obtained.

Now, the color image forming method according to the present invention will be described.

Figure 7 is a schematic sectional view of an electrophotographic apparatus 100 capable of producing a full-color image according to the method of the present invention. Referring to the figure, the apparatus is roughly divided into a recording medium-conveying system (I) including a transfer drum 8 and shown in a right-to-middle part of the apparatus, a latent image-forming section (II) disposed at the middle of the apparatus adjacent to the transfer drum 8, and a rotary developing apparatus (III) as a developing means disposed adjacent to the latent image-forming section (II). The recording medium-conveying system (I) includes recording medium-supplying trays 101 and 102 disposed releasably in an opening provided on the right side of the apparatus body 100; recording medium-feed rollers 103 and 104 disposed almost immediately above the trays 101 and 102; recording medium-supply guides 4A and 4B disposed adjacent to the rollers 103 and 104 and equipped with supply rollers 106; the transfer drum 8 rotatably disposed adjacent to the recording medium supply roller 4B and having an abutting roller 7, a gripper 6, a recording medium-separation charger 12 and a separation claw 14 in this order from its upstream to downstream in the direction of its rotation indicated by an arrow along its outer periphery and also a transfer charger 9 and a recording medium-separation charger 13 inside thereof; a conveyer belt means 15 disposed adjacent to the separation claw 14; a discharge tray 17 disposed adjacent to the conveying end of the conveyer belt means 15 and extending outwardly from the apparatus body 100 so as to be releasable from the body 100; and a fixer 16 disposed adjacent to the tray 17.

The latent image-forming section (II) includes an electrostatic latent image-holding member (i.e., photoconductive drum) 2 disposed rotatably in the direction of an arrow so that its outer periphery contacts the outer surface of the transfer drum 8, and a charge-removing charger 10, a cleaning means 11, a primary charger 3, and an imagewise exposure means such as a laser beam scanner 19 including a polygonal mirror 19a for illuminating the outer surface of the photosensitive drum 2 to form an electrostatic latent image thereon, disposed in this order from the upstream to the downstream in the direction of the rotation in the vicinity of the photosensitive drum 2.

The rotary developing apparatus (III) includes a rotatably disposed housing (hereinafter called "rotating member") 18, and a yellow developing unit 18Y, a magenta developing unit 18M, a cyan developing unit 18C and a black developing unit 18BK respectively disposed within the rotating member 18 so as to visualize an electrostatic latent image formed on the outer periphery of the photosensitive drum 2 when placed at a position facing the outer surface of the photosensitive member 2.

A sequence of the operation of the image forming apparatus having an arrangement as described above will now be explained with respect to a full-color mode. When the photosensitive drum 2 is rotated in the arrow direction in Figure 7, the photoconductor on the drum 2 is uniformly charged by the primary charger 3 and then subjected to imagewise exposure with laser light E modulated by a yellow image signal based on an original (not shown) to form an electrophotographic latent image on the photosensitive drum 2, which is then developed by the yellow developing unit 18Y which has been placed at the developing position facing the photosensitive drum 2 by the rotation of the rotating member 18.

On the other hand, a recording medium conveyed through the supply guide 4A, supply roller 106 and supply roller 4B is held by the gripper 6 at a prescribed time and wound about the transfer drum 8 electrostatically by the abutting roller 7 and an electrode disposed opposite to the roller 7. The transfer drum 8 is rotated in the arrow direction synchronously with the photosensitive drum 2, and the developed image on the photosensitive drum 2 given by the yellow developing unit 18Y is transferred onto the recording medium at a place where the photosensitive drum 2 and the transfer drum 8 abut each other. The transfer drum 8 is further rotated so as to be ready for transfer of a subsequent color ("magenta" in the case shown in Figure 7).

The photosensitive drum is then charge-removed by the Charge-removing charger 10, cleaned by the cleaning means 11, again charged by the primary charger 3 and then subjected to imagewise exposure based on a magenta image signal in the same manner as in the yellow exposure described above. During such electrostatic latent image formation on the photosensitive drum 2 based on the magenta image signal, the rotating member 18 is rotated so that the magenta developing unit 18M is disposed at the above-mentioned prescribed developing position. Then, a prescribed magenta developing operation is performed and the developed magenta image is transferred onto the recording medium already carrying the yellow



image on the transfer drum 8 in the same manner as in the yellow development.

The above operation is repeated also with respect to a cyan color and a black color. After transfer of the four color images, a multi-color image is formed on the recording medium on the transfer drum 8, charge-removed with the respective chargers 12 and 13. Then, the recording medium carrying the multi-color image is released from the gripper 6, separated from the transfer drum 8 by the separation claw 14 and conveyed by the conveyor belt 15 to the fixer 16, where the multi-color image is fixed onto the recording medium under heat and pressure. In this way, one full-color print sequence is completed to provide a prescribed full-color print image.

The fixer 16 includes a hot fixing roller 161 and a pressing roller 162. The hot roller 161 may preferably be covered with a surface layer of, e.g., silicone rubber or fluorine-containing resin, having an excellent releasability. The pressing roller 162 may preferably be surfaced with a fluorine-containing resin.

According to the present invention, in an image forming sequence as described above, a laminate film having a wax-absorbing layer is used as the recording medium. As a result, even when a toner containing a wax component is used to form a fixed toner image thereon, the exudation of the wax causing wax flowout is prevented on the fixed toner image. Further, as the fixation is satisfactorily performed without oil application. The deterioration of the fixed image or the laminate film is avoided. Accordingly, fixed images of a good quality can be formed on the laminate film suitably for an OHP use. More specifically, the fixed image formed on the laminate film provides a color or full-color projected image which is free from graying as a whole and shows a good color reproducibility.

Hereinbelow, the present invention is described more specifically based on Examples, wherein "part(s)" means "part(s) by weight".

Example 1

451 wt. parts of 0.1M- Na_3PO_4 aqueous solution was added to 7-9 wt. parts of deionized water, followed by warming at 60 °C and stirring by a TK homomixer (mfd. by Tokushu Kika Kogyo K.K.) at 12,000 rpm. Then, 67.7 wt. parts of 1.0 M- CaCl_2 aqueous solution was gradually added thereto to form a dispersion medium containing $\text{Ca}_3(\text{PO}_4)_2$.

30	Styrene	170 wt.parts
	2-Ethylhexyl acrylate	30 "
35	Paraffin wax (Tmp = 75 °C)	60 "
40	C.I. Pigment Blue 15	10 wt.parts
	Styrene-methacrylic acid-	
	methyl methacrylate copolymer	5 "
45	Di-tert-butylsalicylic acid	
	metal compound	3 "

50 Of the above-listed ingredients, only C.I. Pigment Blue 15, di-tert-butyl salicylic acid metal compound and styrene were subjected to preliminary mixing by a mixer ("Ebara Milder", mfd. by Ebara Seisakusho K.K.). Then, the remaining ingredients were added, and the entire mixture was warmed at 60 °C and dissolved and dispersed with each other to form a monomer mixture. Then, while the mixture was held at 60 °C, 10 parts of dimethyl 2,2'-azobisisobutyrate (initiator) was added thereto to form a monomer composition.

55 Into the above-prepared dispersion medium under stirring in a 2 liter-flask, the above monomer composition was added and dispersed into particles under stirring by the TK homomixer at 10000 rpm for 20 min. at 60 °C in a nitrogen atmosphere. Then, the content was stirred by a paddle stirrer for 3 hours of reaction at 60 °C and 10 hours of polymerization at 80 °C.



After the polymerization, the product was cooled, acidified with hydrochloric acid to dissolve $\text{Ca}_3(\text{PO}_4)_2$, recovered by filtration, washed with water and dried to obtain a polymerization toner.

The thus-obtained toner was found to have a weight-average particle size of 8.2 microns and a sharp particle size distribution as measured by a Coulter counter. A particle section was observed by a transmission electron microscope by stained ultramicrotomy, whereby a capsule structure having a surface layer consisting mainly of the styrene-acrylic resin and a core consisting mainly of the wax was observed.

0.7 wt. part of hydrophobic silica having a BET specific surface area of $200 \text{ m}^2/\text{g}$ was externally added to 100 wt. parts of the toner. Further, 7 wt. parts of the toner was mixed with 93 wt. parts of a Cu-Zn-Fe type ferrite carrier surface-coated with styrene-methyl methacrylate copolymer to obtain a developer.

The developer was charged in a re-modeled commercially available full-color copying machine ("CLC-500", mfd. by Canon K.K.) and used to form an image on a laminate film as a recording medium prepared in the following manner under developing conditions including environmental temperature of 23°C and humidity of 65 %RH and a developing contrast of 320 volts.

The laminate film used was a laminate film A prepared by coating an about 100 micron-thick PET film with an absorbing layer formed by CVD (chemical vapor deposition) in a known manner of inorganic fine powder comprising aluminum as a principal element. The laminate film A showed an average pore radius of $32 \text{ \AA}$ and a BET specific surface area of $7 \text{ m}^2/\text{g}$.

A yet-unfixed toner image on the laminate film formed by development and transfer in the re-modeled copying machine ("CLC-500") was fixed by passing through an external fixing machine (having the same roller arrangement as the one in the "CLC-500" copying machine but having no oil applicator) at a fixing speed of 20 mm/sec.

As a result, a fixed toner image was formed without causing offset, in the form of a beautiful and clear transparent image free from exudation or flowout trace of the wax component. The fixed toner image was used for projection by an OHP apparatus to provide a very beautiful cyan-colored projected image.

Example 2

A laminate film B was prepared in the same manner as in Example 1 except that a wax-absorbing layer was formed by replacing the inorganic fine powder with silica-type inorganic fine powder. The wax-absorbing layer of the laminate film B showed an average pore radius of $55 \text{ \AA}$ and a BET specific surface area of $11 \text{ m}^2/\text{g}$.

As a result of image formation on the laminate film B otherwise in the same manner as in Example 1, a good fixed image was formed without any exudation trace of the wax component. As a result of projection of the image by an OHP apparatus, a beautiful projection image was obtained without impairing the transparency.

Example 3

The toner production process in Example 1 was repeated except that the C.I. Pigment Blue 15 was replaced with 9 parts of C.I. Pigment Red 122 to prepare a magenta toner, with 8 parts of C.I. Pigment Yellow to prepare a yellow toner, and with 12 parts of commercially available carbon black to prepare a black toner.

Three developers were prepared by using these three colors of toners in the same manner as in Example 1, and totally 4 colors of developers including the blue developer used in Example 1 were used to form a yet un-fixed full-color toner image on a laminate film A as used in Example 1 by development and transfer in the re-modeled copying machine ("CLC-500"). The full-color toner image was fixed by an external fixing machine equipped with a pressure roller of a silicone rubber and without oil application.

The resultant fixed toner image was free of offset or exudation trace of the wax component, thus being excellent in quality.

The transparent film carrying the toner image was used for projection by an OHP apparatus to provide a beautiful full-color projection image. Further, the transparent film was obtained through fixation without oil application, so that it was free from stickiness and excellent in storage stability.

Example 4

A laminate film C was prepared by coating an about 100 micron-thick PET film with a coating liquid prepared by mixing 90 parts of alumina hydrate and 10 parts of polyvinyl alcohol with 1000 parts of water by bar coating, followed by drying at 150°C for 10 min. in a drying oven to form an 8 micron-thick wax

absorbing layer. The wax absorbing layer of the laminate film C showed an average pore radius of 50 Å and a BET specific surface area of 10 m²/g. Image formation and fixation was performed by using the laminate film C otherwise in the same manner as in Example 1, whereby a good fixed toner image was obtained free from exudation trace of wax component. As a result of projection by an OHP apparatus, a beautiful projection image was obtained without impairing transparency.

Comparative Example 1

Development, transfer and fixation of a toner image were performed by using a commercially available OHP film (a corona discharged polyethylene terephthalate film) in place of the laminate film A otherwise in the same manner as in Example 1. As a result, no offset was caused due to the effect of the wax contained in the toner, but a wax exudation trace was observed at a rear end of the image and the image was accompanied with a low transparency as a whole.

Example 5

A laminate film D was prepared in the same manner as the laminate film A except that the amount of the inorganic fine powder was reduced to have a specific surface area of 0.08 m²/g.

Development, transfer and fixation of a toner image were performed by using the laminate film D otherwise in the same manner as in Example 1, no offset was caused but there was observed a slight trace of wax exudation which was however within a practically acceptable extent.

Example 6

25

Styrene-butyl acrylate copolymer	100 parts
Low-molecular weight polyolefin wax	7 parts
Phthalocyanine pigment	4.5 parts
Di-tert-butylsalicylic acid metal compound	3 parts

30

The above ingredients were blended, melt-kneaded by a twin-screw kneading extruder, cooled and then pulverized by a jet stream pulverizer, followed by classification by a pneumatic classifier to obtain a blue powdery toner having a weight-average particle size of 8.5 microns. Then, 100 parts of the toner was blended with 0.8 wt. part of negatively chargeable colloidal silica externally added thereto to obtain a cyan toner, which was then blended with ferrite particles coated with a fluorine-containing acrylic resin in a ratio of 1:9 to obtain a blue developer.

A yet-unfixed toner image was formed on the laminate film A used in Example 1 by using the above-prepared blue developer and the remodeled copying machine ("CLC-500"), and then fixed by an external fixing machine comprising an upper roller coated with a fluorine-containing resin and a lower silicone rubber roller but having no oil applicator, whereby a fixed image with a good transparency and no wax exudation trace was obtained without causing offset.

Example 7

45

A laminate film E was prepared by coating an about 100 micron-thick PET film with a film of silica formed by CVD and found to have an average pore radius of 26 Å and a BET specific surface area of 12 m²/g. Image formation and fixation were performed by using the laminate film E otherwise in the same manner as in Example 6, whereby a fixed toner image with a good transparency and with no wax exudation trace was obtained without causing offset.

50

Example 8

55

This Sheet Has Been Replaced





Polyester	100 parts
Paraffin wax	9 parts
Phthalocyanine pigment	4.5 parts
Di-tert-butylsalicylic acid compound	3 parts

5

The above ingredients were subjected to melt-kneading, pulverization, classification, external addition of silica and blending with carrier in the same manner as in Example 6 to prepare a blue developer.

10 A yet-unfixed toner image was formed and fixed on the laminate film A by using the blue developer otherwise in the same manner as in Example 6, whereby a fixed toner image with excellent transparency was obtained without no wax exudation trace.

Example 9

15 Image formation and fixation were performed in the same manner as in Example 6 except for using the laminate film C used in Example 4 instead of the laminate film A, whereby a fixed image with a good transparency and no wax exudation trace was formed without causing offset.

Comparative Example 2

20

A blue developer was prepared in the same manner as in Example 6 except for omission of the wax component, and used for image formation and fixation in the same manner as in Example 6, whereby offset was caused, thus failing to provide a good fixed toner image.

25 Example 10

A laminate film F having a BET specific surface area of 0.09 m²/g was prepared similarly as the laminate film A used in Example 6 by changing the conditions for forming the absorbing layer.

30 Image formation and fixation were performed on the laminate film thus formed otherwise in the same manner as in Example 6, whereby the resultant fixed toner image showed a somewhat lower transparency which was however at a practically acceptable level.

Example 11

35 A biaxially stretched 100 micron-thick polyethylene terephthalate (PET) film having a heat distortion temperature of 152 °C and a maximum service temperature of 150 °C was coated with a 16 micron-thick transparent resin layer formed by applying a solution in acetone of a polyester resin (solubility parameter: about 11) having a storage modulus (G') of 8x10⁴ dyn/cm² at a temperature of 160 °C and a frequency (W) of 100 rad/sec and a softening point of 116 °C by bar coating, followed by drying, and then with a wax-
40 absorbing layer formed in the same manner as in Example 1, to form a laminate film G.

Separately, a yellow toner powder was prepared by using 100 parts of a polyester resin P₂ (solubility parameter: about 11) having a storage modulus (G') of 4x10³ dyn/cm² at a temperature of 160 °C and a frequency (W) of 100 rad/sec and a softening point of 105 °C, 9 parts of paraffin wax, 3.5 parts of yellow colorant and 4 parts of a chromium-containing organocomplex. The yellow toner powder showed a volume-
45 average particle size of 12 microns, a storage modulus (G') of 8x10³ dyn/cm² and a softening point of 107 °C.

Then, 0.4 part of hydrophobic colloidal silica was externally added to 100 parts of the yellow toner powder to form a yellow toner, which was then mixed with ferrite particles in a weight ratio of 5:100 to obtain a yellow developer.

50 A uniform yet unfixed yellow toner image was formed on the above-prepared laminate film G by using the above yellow developer and image formation and transfer and then fixed in an image forming apparatus as shown in Figure 7 equipped with a hot pressure fixer including a hot fixing roller 161 surfaced with silicone rubber and a pressure roller 162 surfaced with a fluorine-containing resin under the fixing conditions of a hot fixing roller temperature of 160 °C, an average heating time of 25 msec and a pressing force of 3
55 kg/cm² to form a fixed yellow toner image having an image density (McBeth refractive densitometer) of 1.5.

The thus obtained fixed toner image showed no offset and was clear and free from wax exudation trace. When the toner image was projected by an OHP, a very clear yellow transmitted light was obtained to provide a beautiful yellow projected image.

Example 12

5 A magenta toner powder having a volume-average particle size of 12 microns was prepared in the same manner as in Example 11 except for using 1.9 parts of a magenta colorant. The magenta toner powder showed a storage modulus of 6×10^3 dyn/cm².

10 A red developer was prepared by using the magenta toner powder otherwise in the same manner as in Example 11 and then used for image formation and fixation on the laminate film G in the same manner as in Example 11. The resultant fixed image caused no offset and was clear and free from wax exudation trace. When used for projection by an OHP apparatus, the fixed toner image provided very clear red transmitted light and also be beautiful red projected image.

Example 13

15 A cyan toner powder having a volume-average particle size of 12 microns was prepared in the same manner as in Example 11 except for using 5.0 parts of a cyan colorant. The magenta toner powder showed a storage modulus of 1×10^4 dyn/cm² and a softening point of 108 °C.

20 A blue developer was prepared by using the magenta toner magenta otherwise in the same manner as in Example 11 and then used for image formation and fixation on the laminate film G in the same manner as in Example 11. The resultant fixed image caused no offset and was clear and free from wax exudation trace. When used for projection by an OHP apparatus, the fixed toner image provided very clear blue transmitted light and also be beautiful blue projected image.

Example 14

25 A laminate film H was prepared in the same manner as in the laminate film G used in Example 11 except that the absorbing layer was replaced by an 8 micron-thick absorbing layer comprising alumina and polyvinyl alcohol prepared in the same manner as in Example 4.

30 Image formation and fixation were performed on the laminate film H otherwise in the same manner as in Example 11, whereby a clear fixed toner image free from wax exudation trace was obtained without offset. When projected by an OHP, the toner image provided a very beautiful yellow transmitted light and also a beautiful yellow projection image.

Example 15

35 A PET film as used in Example 11 was coated with a methyl ethyl ketone solution of an epoxy resin having a solubility parameter of 10.5, a weight-average molecular weight (Mw) of 20,000, a storage modulus (G') of 5×10^4 dyn/cm² and a softening point of 114 °C, followed by drying to form a 15 micron-thick transparent resin layer, and then coated with an absorbing layer formed in the same manner as in Example 1.

40 Image formation and fixation were performed on the laminate film I so as to provide a fixed toner image having an image density of 0.5 otherwise in the same manner as in Example 11. The resultant fixed toner image was clear, offset-free and also free from wax exudation trace. When projected by an OHP apparatus, the toner image provided a very clear yellow transmitted light and also a beautiful yellow projected image.

Example 16

45 A fixed magenta toner image was formed on the laminate film I in the same manner as in Example 15 except for using the magenta toner prepared in Example 12 so as to provide a fixed image density of 0.5.

50 The resultant fixed toner image was clear, offset-free and also free from wax exudation trace. When projected by an OHP apparatus, the toner image provided a very clear red transmitted light and also a beautiful red projection image.

Example 17

55 A fixed cyan toner image was formed on the laminate film I in the same manner as in Example 15 except for using the cyan toner prepared in Example 13 so as to provide a fixed image density of 0.5.

The resultant fixed toner image was clear, offset-free and also free from wax exudation trace. When projected by an OHP apparatus, the toner image provided a very clear blue transmitted light and also a

beautiful blue projection image.

Examples 18 - 20

- 5 Yellow fixed toner image, magenta fixed toner image and cyan fixed toner image was each formed on a laminate film G having a transparent resin layer of a polyester resin as used in Example 11 otherwise in the same manner as in Examples 15 - 17, respectively. The thus obtained fixed toner images provided further better transmittances than in Examples 15 - 17 because of the transparent layer comprising a polyester resin of the same kind as the toner binder resin.

10

Example 21

- 15 A yellow fixed toner image having an image density of 0.5 was formed on the laminate film H used in Example 14 having a transparent layer of a polyester resin and a wax-absorbing layer comprising alumina particles and polyvinyl alcohol otherwise in the same manner as in Example 15. The toner image provided a further better transmittance than in Example 15 because the laminate film H had a transparent resin layer comprising a polyester resin of the same kind as the toner binder resin.

Example 22

20

A sharp-melting polyester resin prepared by condensation polymerization of propoxide bisphenol and fumaric acid and showing properties shown in the following Table 1 was used as a toner binder resin.

Table 1

25

Storage modulus (G') at 160 °C and 100 rad/sec	Softening point	Solubility parameter
7 x 10	106 °C	about 11

30

100 parts of the above polyester resin and materials shown in Table 2 below were used to prepare toner powder of respective colors.

35

40

45

50

55

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

Table 2

Toner	Colorant	Qty. (parts)	Charge controller	Qty. (parts)
Yellow	C.I. Pigment Yellow 17	3.5	Organochromium complex	4.0
Magenta	C.I. Solvent Red 52	1.0	ditto	4.0
	C.I. Solvent Red 49	0.9		
Cyan	Phthalocyanine pigment	5.0	ditto	4.4
Black	C.I. Pigment Yellow 17	1.2	ditto	4.4
	C.I. Pigment Red 5	2.8		
	C.I. Pigment Blue 15	1.5		

Toner powder of the respective colors showed properties given in Table 3 below.

This Sheet Has Been Replaced





Table 3

Toner	Storage modulus (G') at 160°C, 100 rad/sec	Softening point
Yellow	1×10^4 dyn/cm ²	109 °C
Magenta	8×10^3	108
Cyan	1×10^4	109
Black	1×10^4	109

100 parts each of the toner powders of respective colors were respectively mixed externally with 0.5 part of hydrophobic colloidal silica to form respectively color toners, which were then respectively mixed with a resin-coated ferrite carrier in a weight ratio of 5:100 to provide respective colors of developers. The four colors of developers were charged in an image forming apparatus as shown in Figure 7, and were used for image formation repeatedly on the laminate film G and respectively in the same manner as in Example 11, followed by fixing in the same manner as in Example 11, to form a full-color fixed toner image thereon. The laminate film carrying the full-color fixed toner image was used for projection by an OHP apparatus, whereby a brilliant full-color projection image was formed on a screen and no wax exudation trace was observed.

Example 23

Image formation and fixation were performed to form a full-color fixed toner image on the laminate film H used in Example 14 instead of the laminate film G otherwise in the same manner as in Example 22. When used for projection by an OHP apparatus, the full-color fixed toner image provided a brilliant full color image was projected on a screen and no wax exudation trace was observed.

Example 24

A laminate film J was prepared by replacing the transparent resin layer of a polyester resin of the laminate film G with a 16 micron-thick layer of the polyester resin used as the binder resin in Example 16. A full-color toner image was formed on the laminate film J by using the yellow toner, magenta toner, cyan toner and black toner in the same manner as in Example 16, and the toner image was fixed to cause color mixing under the conditions of a hot fixing roller temperature of 160 °C, an average heating time of 25 msec and a pressing force of 3 kg/cm², whereby a full-color fixed image free from wax exudation trace was formed without offset.

A laminate film suitable for providing a transparency for an OHP (overhead projector) is formed by disposing an absorbing layer on a substrate. The absorbing layer functions to allow addition of a wax component to a toner so as to improve the color mixing characteristic and anti-offset characteristic of the toner without causing a wax exudation trace which is liable to occur in a fixed toner image if the absorbing layer is not provided.

Claims

1. A laminate film for receiving a toner image containing a wax component, comprising: an absorbing layer for absorbing the wax component, and a substrate supporting the absorbing layer.
2. The laminate film according to Claim 1, wherein the wax component is one contained in a polymerization toner obtained through suspension polymerization.
3. The laminate film according to Claim 1, wherein wax component is one contained in a toner prepared through melt-kneading, pulverization and classification of toner ingredients including the wax component.
4. The laminate film according to Claim 1, wherein the wax component has a melting point of 30 - 150 °C.
5. The laminate film according to Claim 1, wherein the wax component has a melting enthalpy of 50 - 250 Joule/g.



Table 3

Toner	Storage modulus (G') at 160°C, 100 rad/sec	Softening point
Yellow	1×10^4 dyn/cm ²	109 °C
Magenta	8×10^3	108
Cyan	1×10^4	109
Black	1×10^4	109

100 parts each of the toner powders of respective colors were respectively mixed externally with 0.5 part of hydrophobic colloidal silica to form respectively color toners, which were then respectively mixed with a resin-coated ferrite carrier in a weight ratio of 5:100 to provide respective colors of developers. The four colors of developers were charged in an image forming apparatus as shown in Figure 7, and were used for image formation repeatedly on the laminate film G and respectively in the same manner as in Example 11, followed by fixing in the same manner as in Example 11, to form a full-color fixed toner image thereon. The laminate film carrying the full-color fixed toner image was used for projection by an OHP apparatus, whereby a brilliant full-color projection image was formed on a screen and no wax exudation trace was observed.

Example 23

Image formation and fixation were performed to form a full-color fixed toner image on the laminate film H used in Example 14 instead of the laminate film G otherwise in the same manner as in Example 22. When used for projection by an OHP apparatus, the full-color fixed toner image provided a brilliant full color image was projected on a screen and no wax exudation trace was observed.

Example 24

A laminate film J was prepared by replacing the transparent resin layer of a polyester resin of the laminate film G with a 16 micron-thick layer of the polyester resin used as the binder resin in Example 16. A full-color toner image was formed on the laminate film J by using the yellow toner, magenta toner, cyan toner and black toner in the same manner as in Example 16, and the toner image was fixed to cause color mixing under the conditions of a hot fixing roller temperature of 160 °C, an average heating time of 25 msec and a pressing force of 3 kg/cm², whereby a full-color fixed image free from wax exudation trace was formed without offset.

A laminate film suitable for providing a transparency for an OHP (overhead projector) is formed by disposing an absorbing layer on a substrate. The absorbing layer functions to allow addition of a wax component to a toner so as to improve the color mixing characteristic and anti-offset characteristic of the toner without causing a wax exudation trace which is liable to occur in a fixed toner image if the absorbing layer is not provided.

Claims

1. A laminate film for receiving a toner image containing a wax component, comprising: an absorbing layer for absorbing the wax component, and a substrate supporting the absorbing layer.
2. The laminate film according to Claim 1, wherein the wax component is one contained in a polymerization toner obtained through suspension polymerization.
3. The laminate film according to Claim 1, wherein wax component is one contained in a toner prepared through melt-kneading, pulverization and classification of toner ingredients including the wax component.
4. The laminate film according to Claim 1, wherein the wax component has a melting point of 30 - 150 °C.
5. The laminate film according to Claim 1, wherein the wax component has a melting enthalpy of 50 - 250 Joule/g.





6. The laminate film according to Claim 1, wherein the wax component comprises at least one member selected from paraffin wax, modified paraffin wax, polyolefin wax, modified polyolefin wax, higher fatty acid, metal salt of higher fatty acid and amide wax.
- 5 7. The laminate film according to Claim 1, wherein the absorbing layer is disposed on the substrate.
8. The laminate film according to Claim 7, wherein the absorbing layer comprises inorganic fine powder.
9. The laminate film according to Claim 8, wherein the absorbing layer comprises inorganic fine powder
10 bonded to the substrate by partial dissolution of the substrate or the inorganic fine powder.
10. The laminate film according to Claim 8, wherein the absorbing layer comprises inorganic fine powder held by a binder layer on the substrate.
- 15 11. The laminate film according to Claim 8, wherein the absorbing layer comprises a film formed by dry coating of the inorganic fine powder.
12. The laminate film according to Claim 8, wherein the inorganic fine powder comprises activated alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.
- 20 13. The laminate film according to Claim 8, wherein the absorbing layer shows an average pore radius of 10 - 200 Å.
14. The laminate film according to Claim 8, which shows a BET specific surface area of 0.1 - 30 m²/g.
- 25 15. The laminate film according to Claim 10, wherein the binder layer comprises polyvinyl alcohol and the inorganic fine powder comprises alumina hydrate.
16. The laminate film according to Claim 8, wherein the inorganic fine powder has an average primary
30 particle size of 0.001 - 0.1 micron.
17. The laminate film according to Claim 10, wherein the binder layer comprises a resin in a weight ratio of 1/1 to 1/50 with respect to the inorganic fine powder.
- 35 18. The laminate film according to Claim 7, wherein the absorbing layer is disposed on a surface treated by plasma or corona discharge of the substrate.
19. The laminate film according to Claim 1, wherein the absorbing layer is disposed on the substrate with an intermediate adhesive layer.
- 40 20. The laminate film according to Claim 19, wherein the adhesive layer comprises polyester resin, acrylic resin, methacrylate resin, styrene-acrylate copolymer or styrene-methacrylate copolymer.
21. The laminate film according to Claim 1, wherein the absorbing layer is disposed on the substrate with
45 an intermediate transparent resin layer.
22. The laminate film according to Claim 21, wherein the transparent resin layer comprises a resin having a solubility parameter of 9.5 - 12.5 and a storage modulus (G') of 1x10³ - 1x10⁵ dyn/cm² as measured at a temperature of 160 °C and a frequency (w) of 100 rad/sec.
- 50 23. The laminate film according to Claim 21, wherein the transparent resin layer comprises a resin having a storage modulus (G') larger than that of the toner, respectively as measured at a temperature of 160 °C and a frequency (w) of 100 rad/sec.
- 55 24. The laminate film according to Claim 21, wherein the absorbing layer comprises inorganic fine powder.
25. The laminate film according to Claim 24, wherein the absorbing layer comprises inorganic fine powder bonded the transparent resin layer by partial dissolution of the transparent resin layer or the inorganic





fine powder.

26. The laminate film according to Claim 24, wherein the absorbing layer comprises inorganic fine powder held by a binder layer on the transparent resin layer.
- 5 27. The laminate film according to Claim 24, wherein the absorbing layer comprises a film formed by dry coating of the inorganic fine powder on the transparent resin layer.
- 10 28. The laminate film according to Claim 24, wherein the inorganic fine powder comprises activated alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.
29. The laminate film according to Claim 24, wherein the absorbing layer shows an average pore radius of 10 - 200 Å.
- 15 30. The laminate film according to Claim 24, which shows a BET specific surface area of 0.1 - 30 m²/g.
31. The laminate film according to Claim 26, wherein the binder layer comprises polyvinyl alcohol and the inorganic fine powder comprises alumina hydrate.
- 20 32. The laminate film according to Claim 24, wherein the inorganic fine powder has an average primary particle size of 0.001 - 0.1 micron.
33. The laminate film according to Claim 26, wherein the binder layer comprises a resin in a weight ratio of 1/1 to 1/50 with respect to the inorganic fine powder.
- 25 34. The laminate film according to Claim 21, wherein the absorbing layer is disposed on a surface treated by plasma or corona discharge of the transparent resin layer.
- 35 35. The laminate film according to Claim 21, wherein the absorbing layer is disposed on the transparent resin layer with an intermediate adhesive layer.
- 30 36. The laminate film according to Claim 35, wherein the adhesive layer comprises polyester resin, acrylic resin, methacrylate resin, styrene-acrylate copolymer or styrene-methacrylate copolymer.
- 35 37. The laminate film according to Claim 21, wherein the transparent resin layer is disposed on a surface treated by plasma or corona discharge of the substrate.
38. The laminate film according to Claim 21, wherein the transparent resin layer is disposed on the substrate with an intermediate adhesive layer.
- 40 39. The laminate film according to Claim 38, wherein the adhesive layer comprises polyester resin, acrylic resin, methacrylate resin, styrene-acrylate copolymer or styrene-methacrylate copolymer.
- 45 40. The laminate film according to Claim 1, wherein the absorbing layer is constituted as a transparent resin layer comprising a transparent resin and inorganic fine powder.
41. The laminate film according to Claim 40, wherein the inorganic fine powder has an average primary particle size of 0.001 - 0.1 micron.
- 50 42. The laminate film according to Claim 40, wherein the transparent resin has a solubility parameter of 9.5 - 12.5 and a storage modulus (G') of 1x10³ - 1x10⁶ dyn/cm² as measured at a temperature of 160 °C and a frequency (w) of 100 rad/sec.
43. The laminate film according to Claim 40, wherein the transparent resin has a storage modulus (G') larger than that of the toner, respectively as measured at a temperature of 160 °C and a frequency (w) of 100 rad/sec.
- 55 44. The laminate film according to Claim 40, wherein the inorganic fine powder comprises activated





alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.

- 5
45. The laminate film according to Claim 40, wherein the absorbing layer shows an average pore radius of 10 - 200 Å.
46. The laminate film according to Claim 40, which shows a BET specific surface area of 0.1 - 30 m²/g.
47. The laminate film according to Claim 40, which has heat-resistant layer on the absorbing layer.
- 10 48. The laminate film according to Claim 47, wherein the heat-resistant layer comprises polyvinyl alcohol.
49. The laminate film according to Claim 40, wherein the absorbing layer is disposed on a surface treated by plasma or corona discharge of the substrate.
- 15 50. The laminate film according to Claim 40, wherein the absorbing layer is disposed on the substrate with an intermediate adhesive layer.
51. The laminate film according to Claim 50, wherein the adhesive layer comprises polyester resin, acrylic resin, methacrylate resin, styrene-acrylate copolymer or styrene-methacrylate copolymer.
- 20 52. The laminate film according to Claim 1, wherein the toner image is a color toner image.
53. The laminate film according to Claim 1, wherein the toner image is a full-color toner image.
- 25 54. A method for forming a fixed toner image on a laminate film, comprising:
a developing step for developing an electrostatic latent image on an electrostatic image-bearing member with a toner containing a wax component to form a toner image on the electrostatic image-bearing member;
a transfer step for transferring the toner image onto the laminate film, the laminate film comprising
30 an absorbing layer for absorbing the wax component in the toner and a substrate supporting the absorbing layer; and
a fixing step for fixing the toner image onto the laminate film under heat and pressure while absorbing the wax component in the toner with the absorbing layer of the laminate film.
- 35 55. The method according to Claim 54, wherein the toner comprises a polymerization toner containing the wax component obtained through suspension polymerization.
56. The method according to Claim 54, wherein ether toner is one prepared through melt-kneading, pulverization and classification of toner ingredients including the wax component.
- 40 57. The method according to Claim 54, wherein the wax component has a melting point of 30 - 150 °C.
58. The method according to Claim 54, wherein the wax component has a melting enthalpy of 50 - 250 Joule/g.
- 45 59. The method according to Claim 54, wherein the wax component comprises at least one member selected from paraffin wax, modified paraffin wax, polyolefin wax, modified polyolefin wax, higher fatty acid, metal salt of higher fatty acid and amide wax.
- 50 60. The method according to Claim 54, wherein the laminate film comprises an absorbing layer disposed on the substrate.
61. The method according to Claim 54, wherein the laminate film comprises the absorbing layer disposed on the substrate with an intermediate transparent resin layer comprising a transparent resin.
- 55 62. The method according to Claim 54, wherein the absorbing layer is constituted as a transparent resin layer comprising a transparent resin and inorganic fine powder dispersed therein.



63. The method according to Claim 62, wherein the toner contains a binder resin in addition to the wax component, and the transparent resin has a storage modulus (G') larger than that of the binder resin, respectively as measured at a temperature of 160 °C and a frequency (ω) of 100 rad/sec.
- 5 64. The method according to Claim 54, wherein the absorbing layer comprises inorganic fine powder.
65. The method according to Claim 64, wherein the inorganic fine powder comprises activated alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.
- 10 66. The method according to Claim 64, wherein the absorbing layer shows an average pore radius of 10 - 200 Å.
67. The method according to Claim 64, which shows a BET specific surface area of 0.1 - 30 m²/g.
- 15 68. The method according to Claim 64, wherein the inorganic fine powder has an average primary particle size of 0.001 - 0.1 micron.

20

25

30

35

40

This Sheet Has Been Replaced



45

50

55



* C L M S *

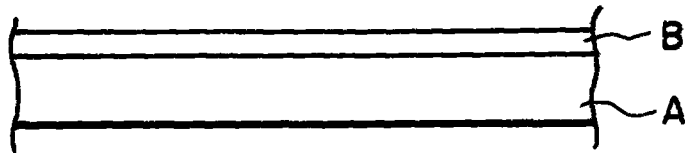


FIG. 1

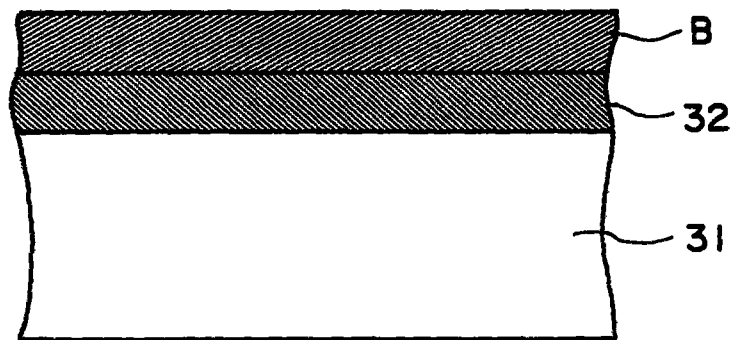


FIG. 2

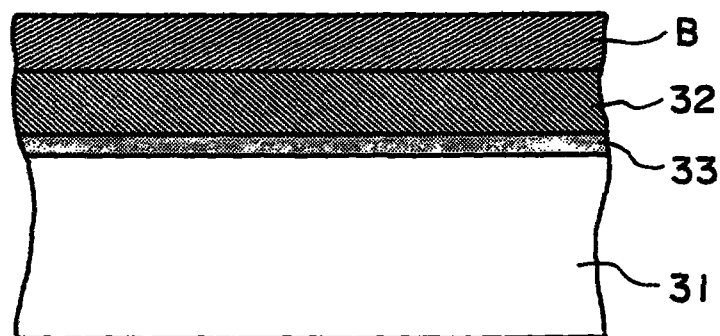


FIG. 3



THIS SHEET HAS BEEN
REPLACED

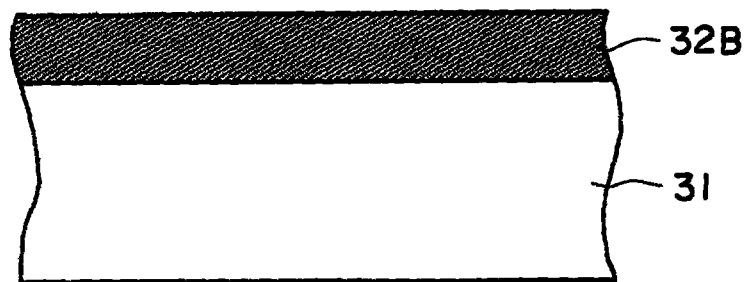


FIG. 4

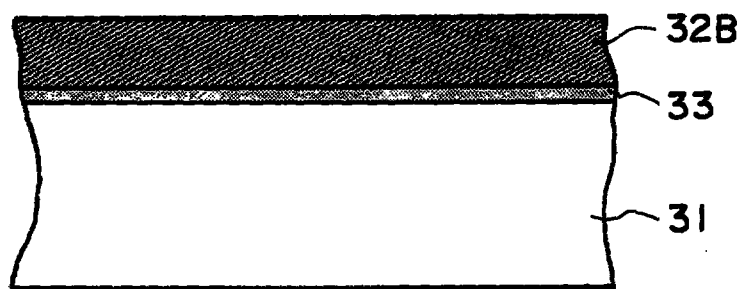


FIG. 5

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

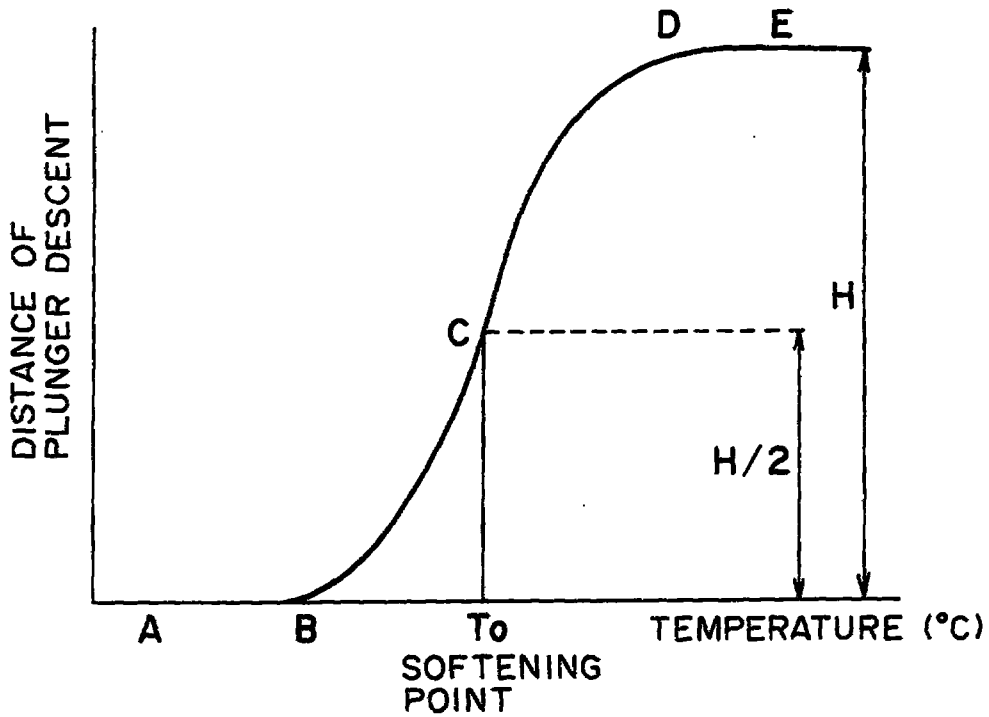


FIG. 6

$P \uparrow$

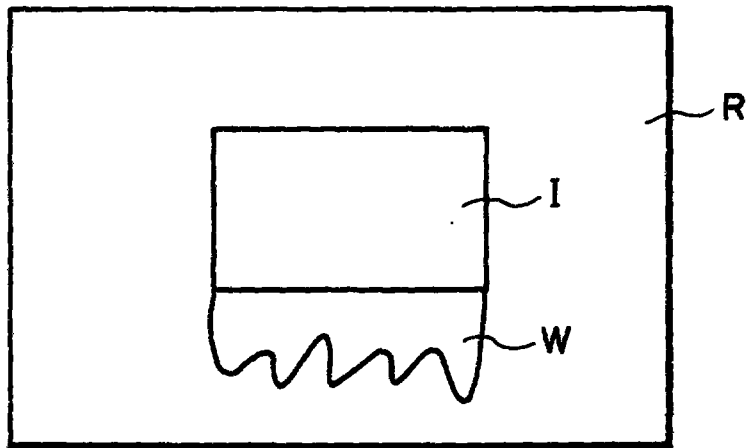


FIG. 8

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

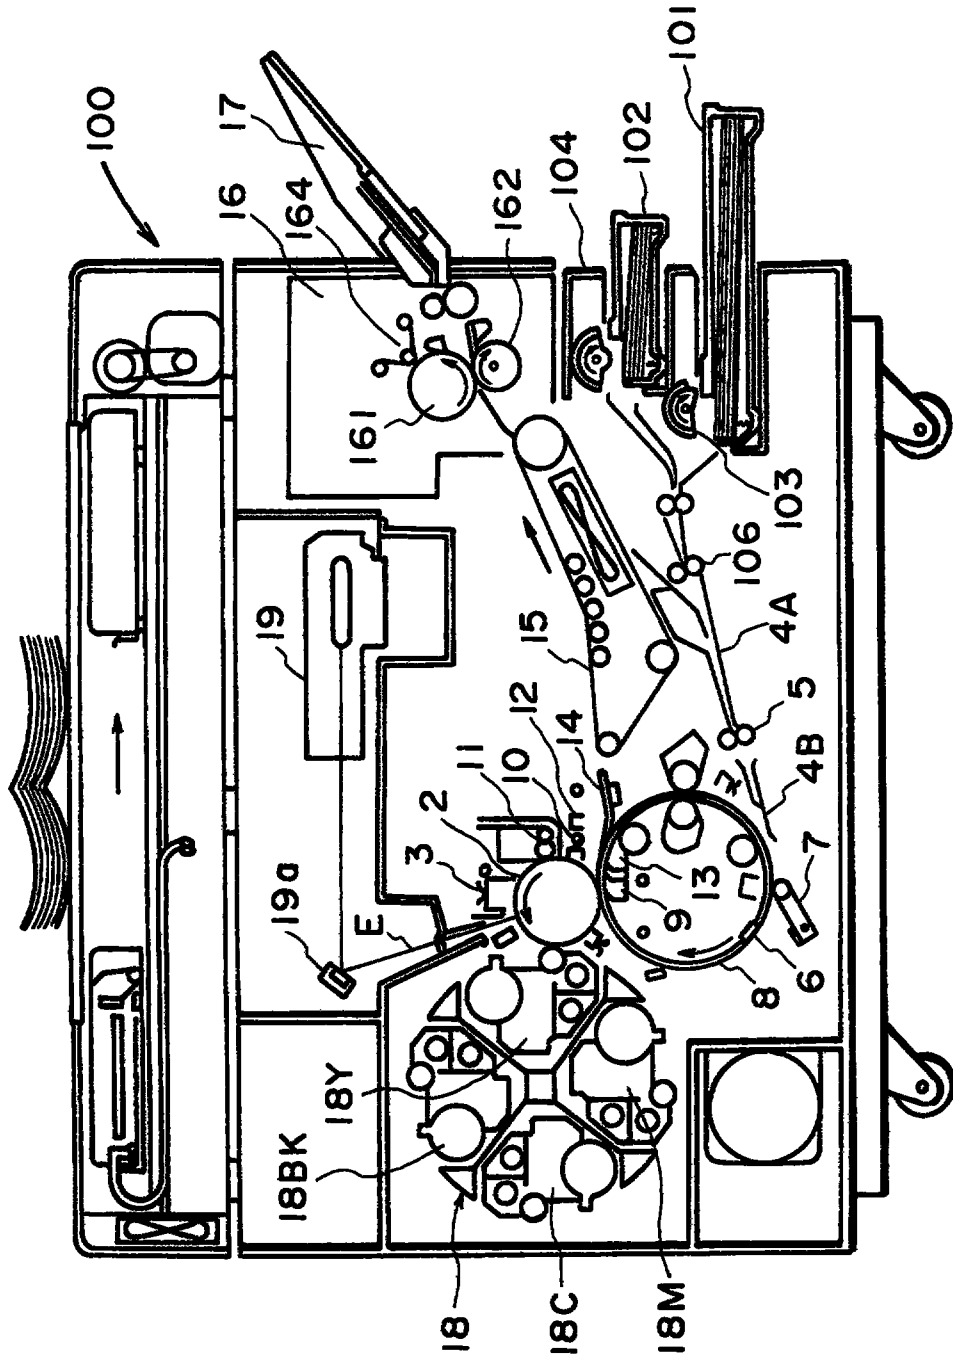


FIG. 7

This Sheet Has Been Replaced



This Sheet Has Been Replaced



-1-

7609078-2
REPLACEMENT SHEET

03 MAR 1997

LAMINATE FILM FOR RECEIVING TONER IMAGE AND
METHOD FOR FORMING FIXED TONER IMAGE ON LAMINATE FILM

FIELD OF THE INVENTION AND RELATED ART

5 The present invention relates to a laminate
film for receiving a toner image and a method for
forming a fixed toner image on a laminate film,
particularly a laminate film for receiving a color or
full-color toner image according to an
10 electrophotographic system and a method forming a
fixed toner image of a color or full color on such a
laminate film.

Conventionally, a full-color image has been
formed generally in the following manner.

15 A photoconductive layer of a photosensitive
drum as an electrostatic latent image holding member
is uniformly charged by a primary charger and exposed
imagewise to laser light modulated by a magenta image
signal of an original to form an electrostatic latent
20 image on the photosensitive drum, which is then
developed with a magenta toner contained in a magenta
developing unit to form a magenta toner image. The
thus formed magenta toner image on the photosensitive
drum is transferred by a transfer charger to a
25 recording medium conveyed thereto.


On the other hand, the photosensitive drum
after the transfer of the toner image to the recording

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-2-

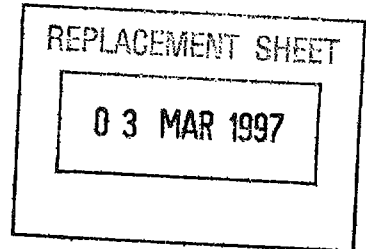

medium is discharged (charge-removed) by a discharger,
cleaned by a cleaning means and again charged by a
primary charger, followed by similar formation of a
cyan toner image and transfer of the cyan toner image
5 to the recording member already carrying the above-
mentioned magenta toner image. Then, similar
operations are repeated for yellow and black colors so
that toner image in totally four colors of magenta,
cyan, yellow and black are transferred to the
10 recording medium. Then, the recording medium having
the four colors of toner images is supplied to fixing
rollers where the toner images are fixed under the
action of heat and pressure to form a fixed full-color
toner image on the recording medium.

15 A toner used in a method of forming such a
fixed color toner image is required to show excellent
meltability on heating and color-mixing characteristic
and is further preferred to show a low softening point
and a low melt viscosity with a highly sharp-melting
20 characteristic.

By using such a sharply melting toner, it is
possible to obtain a color copy which shows excellent
color reproducibility and is highly faithful to an
original image.

25 However, such a sharply melting toner tends
to have a high affinity with fixing rollers and is
liable to cause offsetting onto a fixing roller.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-3-

REPLACEMENT SHEET

03 MAR 1997

Particularly, in the case of a fixing means for use in full-color toner image formation, a plurality of toner layers including those of magenta, cyan, yellow and black, such offsetting is particularly liable to be caused.

For the above reason, it has been conventionally practiced to apply a release agent such as silicone oil onto a fixing roller so as to enhance the toner releasability of the fixing roller. In this case, however, the following problems are accompanied.

As a release agent such as oil is applied onto a fixing roller, the entire apparatus becomes complicated, and the life of the fixing roller can be shortened by the oil application.

On the other hand, as one of various demands for copying in recent years, a resinous laminate film such as a transparency film for an overhead projector (OHP) has been widely used as a type of recording material. If a toner image is fixed onto such a laminate film by using a fixing method using such an oil as described above, the applied oil is attached to the surface of the laminate film to remarkably deteriorate the quality of the laminate film for carrying the resultant toner image.

Accordingly, there are an increasing demand for a fixing system without requiring such oil application at the time of fixing and a novel toner

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

-4-

for realizing such a fixing system.

For the above-mentioned problems, there have been proposed a toner produced containing a release agent such as wax and a toner by suspension polymerization (Japanese Patent Publication (JP-B) 36-10231). In the suspension polymerization, a polymerizable monomer and a colorant (and also a polymerization initiator, a crosslinking agent, a charge control agent and other additives, as desired) are uniformly dissolved or dispersed to form a monomer composition, which is then dispersed in a dispersion medium (e.g., aqueous medium) containing a dispersion stabilizer by using an appropriate stirrer and simultaneously subjected to polymerization to form toner particles having a desired particle size.

In the suspension polymerization system, liquid droplets of the monomer composition are formed in a dispersion medium having a large polarity such as water, components having a polar group contained in the monomer composition tend to be present at the surfaces constituting an interface with the aqueous phase and non-polar components tend to be less present at the surface parts to form a so-called pseudo-capsule structure. By utilizing this process characteristic, it is possible to incorporate in a toner a low-melting point wax which cannot be used in another toner production process, such as the

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

-5-

pulverization process.

Such a toner obtained by the polymerization process can satisfy both anti-blocking characteristic and low-temperature fixability which are generally
5 contradictory with each other owing to the enclosure of a low-melting point wax. More specifically, the enclosed low-melting point wax does not lower the anti-blocking characteristic but promotes the internal thermal conductivity of the toner to realize low-
10 temperature fixation. As a further preferable aspect, the wax melted at the time of fixation functions also as a release agent, so that undesirable high-temperature offset can be prevented without applying a release agent such as oil onto a fixing roller.

15 Thus, the polymerization toner enclosing wax shows advantageous performances at the time of fixation but has caused new problems when it is used in combination with a laminate film as the recording medium, that the clarity or transparency of the
20 resultant image after the fixation is somewhat lowered and the enclosed wax as a release agent exudes at the time of fixing to flow onto the image. More specifically, the wax enclosed within the toner is caused to melt under the action of pressure and heat
25 at the time of fixation and, as shown in Figure 8, is caused to flow on a resinous laminate film R as a recording medium to the rear side with respect to the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-6-

REPLACEMENT SHEET

03 MAR 1997

direction of progress P of the film, thus resulting in a flowout or exudation trace W of wax at the rear end of a fixed image I which is thus made awkward as an image for use in an OHP.

5 It may be conceived of decreasing the wax in order to prevent such wax flow but this results in a lower releasability of the toner. Thus, the above difficulty has been inevitably encountered if wax is used in an amount to provide a sufficient release
10 characteristic.

 This wax flow phenomenon is particularly noticeably observed in the case of resinous recording material such as an OHP film. This may be attributable to a fact that such a resinous recording
15 medium shows a poor ability of absorbing melted wax to allow the wax to remain on the surface thereof and flow out to the image unlike a recording medium such as paper which has an abundant absorptivity sufficient to absorb melted wax to prevent the above-mentioned
20 problems leading to deterioration of image quality.

 Further, in the case of forming a fixed toner image on a recording medium such as a resinous laminate film, it has been generally frequently practiced to use a lower fixing speed for sufficient
25 toner melting than fixation on an ordinary recording material such as paper as it is strongly desired to form a toner image having a high optical

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

03 MAR 1997

transmittance.

In this case, however, the toner on the recording medium is more liable to be offset to the fixing roller at the time of fixation, so that a
5 larger amount of wax is required to be enclosed within the toner in order to show a sufficient releasability than in the case of fixation of a toner image on a recording medium such as paper.

Further, it has been confirmed that the use
10 of a toner image by using such a toner enclosing wax rather results in a decrease in clarity of the resultant transparency film due to opacification caused by crystallization of the wax per se. This is presumably because the wax was enclosed within the toner
15 layer on a recording medium is caused to exude out of the toner at the time of passing between the fixing rollers to cover the whole or a part of the toner image and have an increased crystallinity, thus causing a remarkably lower optical transmittance.


20 Accordingly, it is urgently desired to exercise a measure by which a sufficient amount of wax can be contained without impairing the clarity of the resultant image and without causing a trace of wax flow even on a recording medium such as a resinous
25 laminate film.

Further, in the case of forming a color or full-color toner image on a transparent laminate film

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

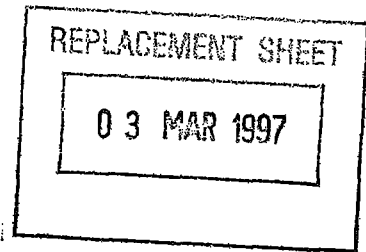

by using an electrophotographic system of the dry development type and projecting the toner image onto a screen by means of an OHP apparatus, the projected image can show a grayish tint as a whole to result in a very narrow range of color reproduction even when the image on the film shows a sufficient color reproducibility. This phenomenon is caused because the yet-unfixed toner image on a smooth laminate film is not provided with a sufficient fluidity by the heating at the time of fixation to retain its particle characteristic and the light incident to the toner image at the time of the projection is scattered to form a shadow on the screen. Particularly, at a halftone part showing a low image density, the absorption level by the dye or pigment in the toner is lowered due to a decrease in number of toner particles and the resultant absorption level becomes identical to a black absorption level due to scattering by toner particles, so that the reproduced color tint becomes grayish.

In the case of naked eye observation of a toner image on a recording medium such as plain paper, a light image reflected from an illuminated fixed toner image is observed, so that the image quality is little affected even if the toner surface retains some particle characteristic. In the case of observing or projecting a toner image onto a screen by transmitted



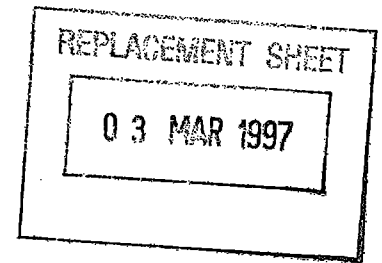

light as in an OHP apparatus, the image quality based on transmittance is remarkably impaired due to light scattering if the toner image retains some toner particle shape. Accordingly, the recording medium for use in an OHP apparatus is required to provide a fixed toner image which retains less particle characteristic and shows an improved optical transmittance while preventing an offset phenomenon onto the fixing roller at the time of fixation.

10

SUMMARY OF THE INVENTION

An object of the present invention is to provide a laminate film for receiving the toner image having solved the above-mentioned problems and also a method for forming a fixed toner image on such a laminate film.

An object of the present invention is to provide a laminate film capable of forming a fixed toner image of excellent quality thereon without using oil at the time of fixation and a method for forming a fixed toner image on such a laminate film.

An object of the present invention is to provide a laminate film capable of providing a fixed toner image with an excellent clarity or transparency and a method for forming a fixed toner image on such a laminate film.

Another object of the present invention is to

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



03 MAR 1997


provide a laminate film capable of forming thereon a fixed toner image of excellent quality while preventing flowout of a wax component contained in a toner at the time of fixation and a method for forming
5 a toner image on such a laminate film.

A further object of the present invention is to provide a laminate film capable of forming thereon a fixed toner image which provides a color or full-color projected image with good color reproducibility
10 and free from graying in tint as a whole, and a method for forming a fixed toner image on such a laminate film.

A still further object of the present invention is to provide a laminate film capable of forming a toner image thereon with excellent
15 performance of preventing toner offset onto a fixing means at the time of fixation, and also a method for forming a fixed toner image on such a laminate film.

According to a principal aspect of the present invention, there is provided a laminate film
20 for receiving a toner image containing a wax component, comprising: an absorbing layer for absorbing the wax component, and a substrate supporting the absorbing layer.

25 According to another aspect of the present invention, there is provided a method for forming a fixed toner image on a laminate film, comprising:

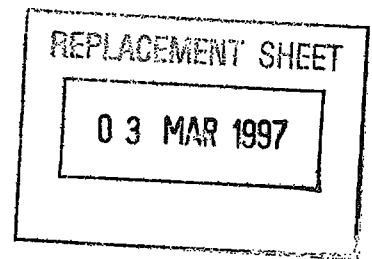

a developing step for developing an electrostatic latent image on an electrostatic image-bearing member with a toner containing a wax component to form a toner image on the electrostatic image-bearing member;

a transfer step for transferring the toner image onto the laminate film, the laminate film comprising an absorbing layer for absorbing the wax component in the toner and a substrate supporting the absorbing layer; and


a fixing step for fixing the toner image onto the laminate film under heat and pressure while absorbing the wax component in the toner with the absorbing layer of the laminate film.

These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a sectional view showing an embodiment of the laminate film according to the present invention.

Figures 2 - 5 are respectively a sectional view showing another embodiment of the laminate film

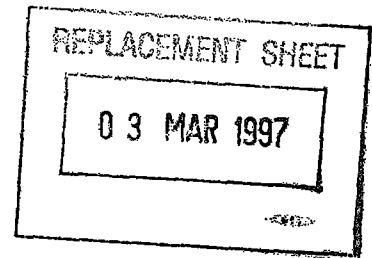

according to the present invention.

Figure 6 is a graph for illustrating a melting characteristic of a toner relating to the present invention.

5 Figure 7 is a schematic view of an image forming apparatus to which the laminate film according to the present invention is applicable and which is applicable for practicing an embodiment of the image forming method according to the present invention.

10 Figure 8 is a plan view for explaining a problem of wax flowout encountered when a fixed toner image is formed by using a conventional laminate film.


DETAILED DESCRIPTION OF THE INVENTION

15 The laminate film according to the present invention is characterized by having an absorbing layer for absorbing a wax component contained in a toner.

 The absorbing layer may be formed by
20 containing inorganic fine particles. The absorptivity of the wax component into the absorbing layer is related with an average pore radius (D) of the absorbing layer or by the inorganic fine powder per se, which is preferably in the range of 10 - 200 Å.
25 Outside the average pore radius (D) range of 10 - 200 Å, the wax absorptivity is lowered.

The absorbing layer may preferably have a

This Sheet Has Been Replaced





03 MAR 1997

-13-

thickness in the range of 0.1 - 10 microns, more preferably 0.5 - 5 microns. If the thickness is below 0.1 micron, the wax absorptivity becomes insufficient and, if the thickness exceeds 5 microns, the laminate film is liable to be turbid to result in a lower transmittance.

The laminate film according to the present invention may preferably have a specific surface area of 0.1 - 30 m²/g which is generally attributable to that of the absorbing layer and the contribution of the base film is generally negligible. If the specific surface area of the laminate film is below 0.1 m²/g, the wax absorptivity of the absorbing layer becomes insufficient. If the specific surface area exceeds 30 m²/g, the transparency of the laminate film is lowered and most of the wax component contained in the toner is absorbed by the laminate film, thus failing to exhibit the intended release effect.

The average pore diameter of the inorganic fine powder or the absorbing layer and the specific surface area of the laminate film may be measured through nitrogen absorption according to the constant volume method and calculated based on the Kelvin formula and BET theory. The values described herein are values measured by using a commercially available gas absorption meter ("Autosorb 1", available from Yuasa Ionic K.K.). For measurement of the specific



03 MAR 1997

-14-

surface area of the laminate film, a laminate film sample measuring 100 mm x 100 mm is cut into pieces each measuring 5 x 5 mm, and all the cut pieces are placed in the gas absorption meter.

5 The structure of the laminate film according to the present invention will be described with reference to Figure 1.

Referring to Figure 1, a laminate film according to the present invention comprises a base
10 film A of a transparent resin as a substrate and an absorbing layer B formed on the base film A. The base film A is required to have a heat resistance so as not to cause a noticeable thermal deformation due to heating for heat fixation or heat and pressure
15 fixation. More specifically, the base film A may preferably have a heat distortion temperature of 145 °C or higher, more preferably 150 °C or higher, as measured under the condition of 4.6 Kg/cm² according to ASTM D648. Specific examples of such a base film A
20 may include films of polyethylene terephthalate (PET), polyester, polyamide and polyimide showing a heat resistance represented by a heat distortion temperature of 145 °C or higher under the above condition and a maximum usable temperature of 100 °C
25 or higher. Among these, polyethylene terephthalate film is particularly preferred in view of its heat resistance and transparency. The base film is

03 MAR 1997

-15-

required to have a thickness not causing wrinkles even when softened under heating for fixation. A thickness of 50 microns or more is sufficient, e.g., in case of polyethylene terephthalate. Even a transparent film
5 can cause a lowering in transmittance if it becomes excessively thick. For these reasons, the base film A may preferably have a thickness of 50 - 300 microns, more preferably 100 - 200 microns, further preferably 70 - 150 microns.

10 Referring to Figure 1, the absorbing layer B may be formed by application or adhesion of inorganic fine powder on the base film so as to provide fine pores.

The inorganic fine powder may for example
15 comprise activated alumina, aluminum hydroxide, hydrated alumina, silica and titanium oxide. These materials may be used singly or in mixture of two or more species.

The inorganic fine powder may preferably have
20 an average primary particle size of 0.001 - 0.1 micron, more preferably 0.001 - 0.05 micron. If the particle size is below 0.001 micron, the cohesive force between particles becomes too large to form a uniform absorbing layer and, if the particle size
25 exceeds 0.1 micron, the wax absorptivity or transparency of the absorbing layer is impaired.

The absorbing layer B may for example be

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

-16-

formed on the absorbing layer A by dispersing such an inorganic fine powder in an appropriate solvent together with an appropriate binder, as desired, to form a coating liquid and applying the coating liquid
5 onto the base film A by known coating methods, followed by drying.

The solvent can have a solubility of slightly dissolving the surface of the base film A or the inorganic fine powder.

10 Examples of the binder may include known film-forming resins, such as polyester resins, vinyl resin, butadiene resins, epoxy resins, polyamide resins and polyurethane resins.

The binder resin and the inorganic fine
15 powder may be used in a weight ratio of 1:1 - 1:50, more preferably 1:3 - 1:20.

The absorbing layer B can also be formed by coating the base film A with a layer of the inorganic fine particles by known deposition methods such as CVD
20 (chemical vapor deposition) and PVD (physical vapor deposition).

In order to enhance the adhesion between the base film A and the inorganic fine powder or binder resin, it is possible and preferred to apply a surface
25 treatment such as plasma or corona discharge, or a primer layer to the base film A.

Explanation is made on a polymerization toner

03 MAR 1997

This Sheet Has Been Replaced



-17-

as a preferred example of a toner used in combination with the laminate film according to the present invention. Such a polymerization toner may be produced in the following manner.

5 Additives such as a release agent, a colorant and a charge control agent are added in a polymerizable monomer, and the mixture is heated until the release agent is dissolved or melted and is subjected to uniform dissolution or dispersion by
10 using a mixer such as a homogenizer or an ultrasonic disperser to form a monomer composition, which is then dispersed in an aqueous medium containing a dispersion stabilizer at a temperature nearly equal to that of the monomer composition by using a mixer, such as an
15 ordinary stirrer. The stirring speed and time are preferably adjusted so as to provide the resultant monomer droplets with a prescribed toner size of generally 30 microns or smaller, and thereafter the stirring is continued at such an intensity as to
20 retain the particle size and prevent the precipitation of the particles under the action of a dispersion stabilizer. The polymerization temperature is set to a temperature below the precipitation temperature of the release agent, and a polymerization initiator is
25 added to effect the polymerization. After the reaction, the produced toner particles are washed, recovered by filtration and dried. In the suspension

THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

-18-

polymerization, it is generally preferred to use 300 - 3000 wt. parts of water as a dispersion medium per 100 wt. parts of the monomer composition.

- Examples of the polymerizable monomer usable for constituting the polymerization toner may include:
- styrene-type monomers, such as styrene, o-methylstyrene, m-methylstyrene, p-methylstyrene, p-methoxystyrene, and p-ethylstyrene; acrylates, such as methyl acrylate, ethyl acrylate, n-butyl acrylate, isobutyl acrylate, n-propyl acrylate, n-octyl acrylate, dodecyl acrylate, 2-ethylhexyl acrylate, stearyl acrylate, 2-chloroethyl acrylate and phenyl acrylate; methacrylates, such as methyl methacrylate, ethyl methacrylate, n-propyl methacrylate, n-butyl methacrylate, isobutyl methacrylate, n-octyl methacrylate, dodecyl methacrylate, 2-ethylhexyl methacrylate, stearyl methacrylate, phenyl methacrylate, dimethylaminoethyl methacrylate, and diethylaminoethyl methacrylate; acrylonitrile, methacrylonitrile, and acryl amide.

- These monomers may be used singly or in mixture of two or more species. Among the above monomers, styrene or a styrene derivative may preferably be used singly or in mixture with another monomer in view of developing characteristics and successive image forming characteristics of the resultant toner.

THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

-19-

The dispersion medium for producing the polymerization toner may be formed by dispersing a stabilizer, such as polyvinyl alcohol, gelatin, methyl cellulose, methyl hydroxypropyl cellulose, ethyl
5 cellulose, sodium salt by carboxymethyl cellulose, polyacrylic acid or its salt, starch, calcium phosphate, aluminum hydroxide, magnesium hydroxide, calcium metasilicate, barium sulfate or bentonite in an aqueous medium. The stabilizer may preferably be
10 used in an amount of 0.2 - 20 wt. parts per 100 wt. parts of the polymerizable monomer.

In order to finely disperse such a stabilizer, 0.001 - 0.1 wt. part of a surfactant may be used. The surfactant functions to promote the
15 action of the dispersion stabilizer, and examples thereof may include: sodium dodecylbenzenesulfonate, sodium tetradecyl sulfate, sodium pentadecyl sulfate, sodium octyl sulfate, sodium oleate, sodium laurate, potassium stearate, and calcium oleate.

20 It is further preferred to add a polymer or copolymer having a polar group in the monomer composition for polymerization. Further, it is preferred in the present invention that a monomer composition to which a polymer, copolymer or cyclic
25 rubber having a polar group has been added is suspended for polymerization in an aqueous medium which contains a dispersant chargeable to a polarity

THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

-20-

reverse to that of the polar polymer, etc. More specifically, a cationic (or anionic) polymer, copolymer or cyclic rubber contained in the monomer composition exerts an electrostatic attraction force at the surfaces of droplets of the monomer composition under polymerization with an anionic (or cationic) dispersant of the reverse chargeability, so that the surfaces of the droplets are covered with the dispersant to prevent the coalescence of the droplets and stabilize the dispersion, and the added polar polymer, etc., are caused to gather at the surfaces of the droplets to form a kind of shell, thus providing toner particles of a pseudo-capsule structure. A toner satisfying both fixability and anti-blocking characteristic which are generally contradictory with each other can be obtained by forming a shell of a polar polymer (or copolymer or cyclic rubber) having a relatively high molecular weight so as to provide excellent anti-blocking and anti-offset characteristic and a core of a component having a relatively low molecular weight contributing to an improved fixability through the polymerization. Examples of the polar polymer or copolymer and the reversely chargeable dispersant may be enumerated below:

(1) Cationic polymers or copolymers, inclusive of: homopolymers of a nitrogen-containing monomer, such as dimethylaminoethyl methacrylate or

THIS SHEET HAS BEEN
REPLACED



REPLACEMENT SHEET

03 MAR 1997

-21-

diethylaminoethyl methacrylate, and copolymers of such a nitrogen-containing monomer with another monomer, such as styrene or an unsaturated carboxylic acid ester.

- 5 (1) Anionic polymers or copolymers, inclusive of: homopolymers of a nitride monomer such as acrylonitrile, a halogen-containing monomer such as vinyl chloride, an unsaturated carboxylic acid such as acrylic acid or methacrylic acid, an unsaturated
10 dibasic acid, an unsaturated dibasic acid anhydride, and a nitro group-containing monomer, and also copolymers of these monomers with a styrene-type monomer.

Cyclic rubber can be used instead of the
15 above-mentioned polar polymer or copolymer.

(3) Anionic dispersants including silica fine powder, particularly colloidal silica having a BET specific surface area of $200 \text{ m}^2/\text{g}$ or larger.

- (4) Cationic dispersants including hydrophilic
20 positively chargeable silica fine powder, such as aminoalkyl-modified colloidal silica, preferably having a BET specific surface area of $200 \text{ m}^2/\text{g}$ or larger, and aluminum hydroxide.

Such a dispersant may preferably be used in a
25 proportion of 0.2 - 20 wt. parts, particularly 0.3 - 15 wt. parts, per 100 wt. parts of the polymerizable monomer composition.

THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

In the present invention, it is preferred to incorporate a charge control agent in the toner to control the chargeability of the toner. The charge control agent may be those having little
5 polymerization inhibiting characteristic and little transferability to an aqueous medium selected from known charge control agents. Examples of positive charge control agents may include: nigrosine dyes, triphenylmethane dyes, quaternary ammonium salts,
10 amine compounds and polyamine compounds. Examples of negative charge control agents may include: metal-containing salicylic acid compounds, metal-containing monoazo dye compounds, styrene-acrylic acid copolymer, and styrene-methacrylic acid copolymer.

15 The colorant contained in the toner used in the present invention may be known ones. Examples thereof may include: carbon black; iron black; dyes, such as C.I. Direct Red 1, C.I. Direct Red 4, C.I. Acid Red 1, C.I. Basic Red 1, C.I. Mordant Red 30,
20 C.I. Solvent Red 49, C.I. Solvent Red 52, C.I. Direct Blue 1, C.I. Direct Blue 2, C.I. Acid Blue 9, C.I. Acid Blue 15, C.I. Basic Blue 3, C.I. Basic Blue 5, C.I. Mordant Blue 7, C.I. Direct Green 6, C.I. Basic Green 4, and C.I. Basic Green 6; and pigments, such as
25 Lead Yellow, Cadmium Yellow, Mineral Fast Yellow, Navel Yellow, Naphthol Yellow S, Hansa Yellow G, Permanent Yellow NCG, Turtladine Lake, Molybdenum

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-23-

REPLACEMENT SHEET

03 MAR 1997

Orange, Permanent Orange GTR, Benzidine Orange G,
Cadmium Red, Permanent Red 4R, Watching Red Ca-salt,
Brilliant Carmine 3B, Fast Violet B, Methyl Violet
Lake, Ultramarine, Cobalt Blue, Alkali Blue Lake,
5 Victoria Blue Lake, quinacridone, disazo-type yellow
pigments, Phthalocyanine Blue, Fast Sky Blue, Pigment
Green B, Malachite Green Lake, and Final Yellow Green
G. When the toner is produced by polymerization, it
is necessary to pay attention to the polymerization
10 prohibiting property and transferability to water of a
colorant used. For this reason, it is preferred to
apply to the colorant used a surface treatment, such
as a hydrophobicity-imparting treatment with a
substance free from polymerization-inhibiting
15 characteristic.

Examples of the wax contained as a release
agent in the toner used in the present invention may
include: paraffin-type waxes, polyolefin-type waxes
and modified products (e.g., oxidation or grafting
20 products) of these, higher fatty acids and their
metal salts and amide wax, but these are not
exhaustive.

The wax used in the present invention may
preferably have a melting point in the range of 30 -
25 150 °C, more preferably 40 - 140 °C. If the melting
point is below 30 °C, the anti-blocking characteristic
and shape-retaining characteristic of the resultant

THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

-24-

toner becomes insufficient. If higher than 150 °C, a sufficient release effect is not exhibited. The melting point herein is one measured as a temperature giving a maximum heat absorption peak on a DSC

5 (differential scanning calorimeter) curve.

The wax used in the present invention may preferably be one showing a melting enthalpy ΔH of 50 - 250 J/g.

Such a wax may preferably be used in a

10 proportion of 0.1 - 50 wt. parts, more preferably 1 - 45 wt. parts, further more preferably 5 - 40 wt. parts, per 100 wt. parts of the polymerizable monomer. Below 0.1 wt. part, little release effect is exhibited. Above 50 wt. parts, the stability in production is


15 lowered, and the anti-blocking characteristic and storage stability are also liable to be lowered.

Examples of the polymerization initiator may include: azo or diazo type polymerization initiators, such as 2,2'-azobis(2,4-dimethylvaleronitrile), 2,2'-

20 azobisisobutyronitrile, 1,1'-azobis(cyclohexane-1-carbonitrile) and 2,2'-azobis-4-methoxy-2,4-dimethylvaleronitrile; and peroxide type polymerization initiators, such as benzoyl peroxide, methyl ethyl ketone peroxide, diisopropyl

25 peroxy carbonate, cumene hydroperoxide, 2,4-dichlorobenzoyl peroxide, and lauroyl peroxide. It is also possible to use a redox type initiator comprising

THIS SHEET HAS BEEN
REPLACED

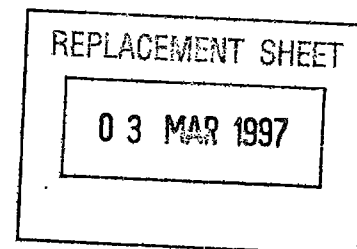

a peroxide as described above and a reducing agent, such as dimethylaniline, a mercaptan, a tertiary amine, an iron (II) salt or sodium sulfite.

The polymerization initiator may be
5 appropriately used so as to provide a desired molecular weight, and the amount thereof in 0.1 - 10 wt. % of the polymerizable monomer may generally be sufficient.

Some further explanation is given to the wax
10 (release agent), polymerization initiator and polymerization temperature.

When a wax having a low melting or softening point, such as paraffin wax, is used, the wax is precipitated from the polymerizable monomer
15 composition at a low temperature, and the polymerization temperature is lowered correspondingly. In such a case, it is preferred to use an initiator having a short half-life, such as a redox initiator or 2,2'-azobis-4-methoxy-2,4-dimethylvaleronitrile.

20 In the case of using a wax having a high melting or softening point, such as polyolefin wax, it is preferred to use an autoclave for dissolving or melting the wax in the polymerizable monomer composition and use a polymerization initiator, such
25 as 2,2'-azobis(2,4-dimethylvaleronitrile) or dimethyl-2,2'-azobisisobutyrate as the wax has a higher precipitation temperature than in the above-mentioned



03 MAR 1997

-26-


case of a wax having a low melting point or softening point, such as paraffin wax.

In the present invention, it is also possible to use a toner obtained through kneading,
5 pulverization and classification in addition to the above-mentioned polymerization toner. The binder resin for this purpose may be homopolymer or copolymer of the above-mentioned monomers for producing the polymerization toner inclusive of styrene-type
10 monomers and acidic monomers, such as acrylic acid, methacrylic acid and maleic acid and esters thereof, polyester, polysulfonate, polyether, polyurethane, or a mixture of the above resins. Such a so-called pulverization toner may be prepared by mixing and
15 melt-kneading the binder resin with other toner components by using a hot kneading means, such as hot rollers, a kneader or an extruder, followed by mechanical pulverization and classification.

In the toner used in the present invention,
20 it is possible to add known additives for imparting various characteristics. Such additives may preferably a particle size which is 1/10 or less of the volume-average particle size of the resultant toner particles in view of the durability of the
25 resultant toner. The particle size of the additive referred to herein means an average particle size obtained by surface observation of toner particles

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

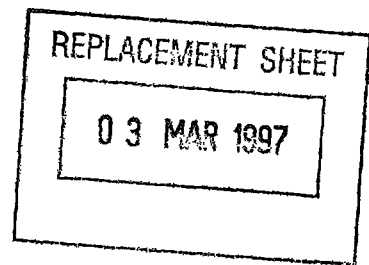

-27-

through an electron microscope. Examples of such additives for imparting various properties may include the following:

1) Fluidity-imparting agent: metal oxides (such as silicon oxide, aluminum oxide, and titanium oxide), carbon black, fluorinated carbon. It is preferred that these have been subjected to a hydrophobicity-imparting treatment.

2) Abrasive: metal oxides (such as strontium titanate, cerium oxide, aluminum oxide, magnesium oxide, and chromium oxide), nitrides (such as silicon nitride), carbides (such as silicon carbide), metal salts (such as calcium sulfate, barium sulfate, and calcium carbonate).

3) Lubricant: powder of fluorine-containing resin (such as polyvinylidene fluoride and polytetrafluoroethylene), fatty acid metal salts (such as zinc stearate and calcium stearate).


4) Charge-controlling particles: particles of metal oxides (such as tin oxide, titanium oxide, zinc oxide, silicon oxide, and aluminum oxide), carbon black.

These additives may preferably be added in an amount in the range of 0.1 - 10 wt. parts, more preferably 0.1 - 5 wt. parts, per 100 wt. parts of the toner particles. These additives may be added singly or in combination of two or more species.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

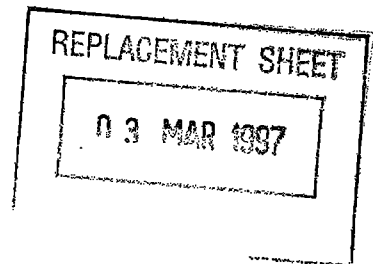

In the present invention, so as to provide a laminate film having good transmittance and color-reproducibility of the projected image, it is preferred to provide on the surface of a substrate
5 heat-resistant film a layer of a transparent resin which is compatible with a binder resin constituting toner particles used for color image formation and has a thermal fusion characteristic different from that of the toner binder resin.

10 Figures 2 and 3 illustrate such embodiments.

Referring to Figures 2 and 3, each laminate film comprises a transparent base film 31 which is similar to the base film A in the embodiment shown in Figure 1, and thereon a transparent resin layer 32 as
15 described above for improving the transmittance of the fixed color image. It is preferred that the transparent resin layer 32 is compatible with the toner binder resin constituting toner particles forming a color image at the temperature of hot
20 fixation. The compatibility with the toner binder resin means that no boundary is formed between the resin of the transparent resin layer 32 and the toner binder resin in the fixed image. As a measure of selection, it is preferred that the resin of the
25 transparent resin layer 32 has a solubility parameter in the range of ± 1.5 , more preferably ± 1.0 , with solubility parameter of the toner binder resin as the






03 MAR 1997

-29-

principal toner binder resin (constituting 50 wt. % or more of the whole binder resin). The solubility parameters of various resins are disclosed in many publications inclusive of polymer handbooks. For example, when a polyester resin having a solubility parameter of about 11.0 is used as a principal toner binder resin, the resin of the transparent resin layer 32 may suitably be a thermoplastic resin, such as polyester resin, polymethyl methacrylate resin, epoxy resin, polyurethane resin, vinyl chloride resin or vinyl chloride-vinyl acetate copolymer resin having a solubility parameter of 11.0 ± 1.5 . It is particularly preferred that the resin of the transparent resin layer 32 is composed of a resin of the same species as the principal toner binder resin.

The resin used in the transparent resin layer 32 may preferably have a storage modulus (G') of 1×10^3 - 1×10^6 dyn/cm², more preferably 5×10^3 - 5×10^5 dyn/cm², as measured at 160 °C and a frequency (ω) of 100 rad/sec. If the storage modulus (G') is below 1×10^3 dyn/cm², an offset phenomenon is liable to occur when a toner image is fixed by a hot pressure roller and the transparent resin layer 32 is liable to be partially peeled off the base film 31 and be damaged. If the storage modulus (G') exceeds 1×10^6 dyn/cm², a toner image is allowed to enter only a very slight degree into the transparent resin layer 32 under

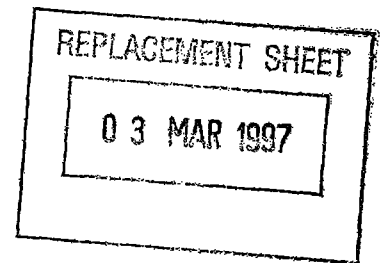

-30-

fixation by a hot pressure roller, so that the resultant toner image becomes grayish as a whole.

The storage modulus (G') values for the resin constituting the transparent resin layer referred to
5 herein are based on values measured by using a mechanical spectrometer ("RMS-800", available from Rheometrics Inc.) under the conditions including a frequency (ω) of 100 rad/sec and an automatically determined strain rate. The transparent resin layer
10 32 may have a thickness of 3 - 30 microns, preferably 8 - 15 microns, while the optimum thickness can vary depending on the particle size of the toner to be fixed thereon.

An absorbing layer B similar to the one in
15 the embodiment shown in Figure 1 may be formed on the transparent resin layer 32 in the same manner as explained with reference to Figure 1.

The embodiment of Figure 3 is similar to the one of Figure 2 except that an adhesive layer 33 is
20 disposed between the base film 31 and the transparent resin layer 32 so as to enhance the adhesion between these layers. The adhesive layer 33 may comprise a resin which is compatible with resins constituting the base film 31 and the transparent resin layer 32,
25 examples of such a resin may include: polyester resin, acrylate resin, methacrylate resin, styrene-acrylate copolymer, and styrene-methacrylate copolymer.

THIS SHEET HAS BEEN
REPLACED



REPLACEMENT SHEET

03 MAR 1997

-31-

Figures 4 and 5 show other embodiments of the laminate film according to the present invention which correspond to those shown in Figures 2 and 3, respectively, but separate absorbing layers B shown in Figures 2 and 3 are omitted by dispersing the above-mentioned inorganic fine powder in the transparent resin layers to form a transparent resin layer 32B having wax-absorptivity. In these cases, it is preferred that the transparent resin layer 32B is provided with pores having an average pore radius (D) of 10 - 200 Å.

The transparent resin layer 32 or 32B may be formed on the base film 31 by dissolving a resin therefor in a volatile solvent such as alcohols, e.g., methanol and ethanol, and ketones, e.g., methyl ethyl ketone and acetone, and further dispersing the inorganic fine powder therein for the transparent resin layer 32B, and then applying the resultant coating liquid by bar coating, dipping, spraying, and spin coating onto the base film 31, followed by drying. In order to enhance the adhesion between the base film 31 and the transparent resin layer 32 or 32B so as to prevent a toner image from being peeled off the base film 31 or the entire laminate film, the surface of the base film can be processed with plasma or corona discharge in addition to or alternatively with the formation of an adhesive layer 33 (Figure 3

THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

and Figure 5).


Now, a toner used for image formation in combination with the laminate film according to the present invention will be explained.

5 A toner used in a color electrophotographic apparatus is required to show good melting and color mixing characteristic on heating, a low softening point, a low storage modulus at the fixation temperature and a sharp meltability.

10 In relation with the laminate film, it is preferred that the toner has a storage modulus which is clearly smaller than the resin constituting the transparent resin layer 32 or 32B. More specifically, the toner may preferably show a storage modulus of
15 $1 \times 10^2 - 1 \times 10^5 \text{ dyn/cm}^2$, more preferably $5 \times 10^2 - 5 \times 10^4 \text{ dyn/cm}^2$, so as to provide good compatibility with the transparent resin layer 32 or 32B and color mixing characteristic between toners.


A color copy faithful to an original multi-
20 color or full-color image can be formed and a color reproduction range is enlarged by using sharp melting toners.

It is particularly preferred to use a toner comprising a polyester resin as a binder resin in
25 combination with the laminate film according to the present invention, in view of fixation and sharp melting characteristics. An example of the sharp

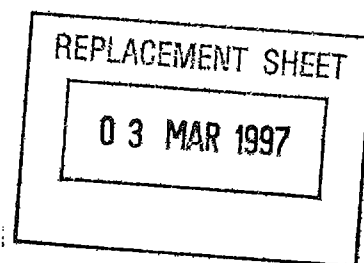

melting polyester is a polymer having ester linkages in its polymer main chain synthesized from a diol compound and a dicarboxylic acid.

In view of sharp melting characteristics, it is particularly preferred to use a polyester resin, which has been obtained through condensation polymerization of at least a bisphenol derivative represented by the formula:

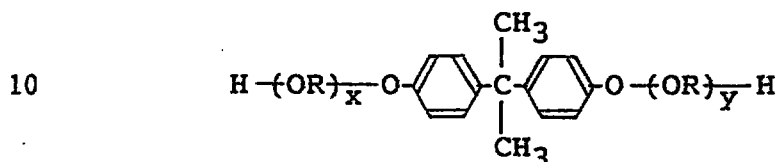

(wherein R denotes ethylene or propylene group, x and y are independently a positive integer of 1 or larger giving an average of x+y in the range of 2 - 10) or a substitution derivative thereof with a carboxylic acid component (such as fumaric acid, maleic acid, maleic anhydride, phthalic acid, terephthalic acid, trimellitic acid and pyromellitic acid) selected from two or more functional carboxylic acids, anhydrides and lower alkyl esters thereof.

Such a polyester resin may preferably have a softening point of 75 - 150 °C, more preferably 80 - 130 °C. The softening characteristic of a toner comprising a polyester resin as a binder resin is shown in Figure 6 as measured according to a method described below.

A toner softening characteristic is

THIS SHEET HAS BEEN
REPLACED



REPLACEMENT SHEET

03 MAR 1997

-34-

represented by a curve of plunger descending distance vs. temperature (softening S-character curve) as shown in Figure 6. A sample toner or resin in an amount of 1 - 3 g accurately weighed is placed on a die having a nozzle diameter of 0.2 mm and a thickness of 1.0 mm and preheated at an initially set temperature of 70 °C for 30 sec and then heated at a constant temperature-raising rate of 6 °C/min. under a plunger having a sectional area of 10 cm² and exerting an extrusion weight of 20 kg. As the temperature is raised at a constant rate, the toner is gradually heated to start flowing (A→B). On further heating, the toner is melted to flow at a large rate (B→C→D) and then the plunger descent is ceased to complete the extrusion (D→E).

The height H of the S-character curve corresponds to the total amount of the flown toner or resin sample, and a temperature at a point C at a height H/2 represents the softening point of the sample.

In relation with the laminate film, it is preferred that the toner or its binder resin shows a storage modulus (G') smaller than that of the resin constituting the transparent resin layer 32 or 32B respectively measured at 160 °C and a frequency of 100 rad/sec. It is preferred that the transparent resin layer 32 or 32B shows a higher modulus than the toner

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

-35-

or toner binder resin at a fixing temperature (e.g.,
130 - 170 °C). In case where the resin constituting
the transparent resin layer 32 or 32B has a storage
modulus (G') close to that of the toner binder resin
5 at the fixing temperature, if fixing is performed
under such a condition that a portion having two or
more colors of toners overlapping with each other and
also a portion of a single color toner for producing a
full color toner are both fixed to provide a
10 sufficient transparency at a single fixing operation,
the transparent resin layer 32 or 32B is also
sufficiently heated to lower its viscoelasticity, so
that the layer 32 or 32B is liable to be peeled off at
the interface with the base film 31 and thus a part of
15 the image can be peeled and taken by the hot fixing
roller, thus causing a high temperature offset.

In case where the resin constituting the
transparent resin layer 32 or 32B has a storage
modulus (G') lower than that of the toner binder
20 resin, a single color toner image can be fixed onto
the layer 32 or 32B, but good color mixing is
difficult when toner images of different colors are
fixed in superposition since the melt viscosity of the
transparent resin layer 32 or 32B becomes lower than
25 that of the toner binder resin.

In case where the resin of the transparent
resin layer 32 or 32B exceeds 1000 times that of the

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

-36-

toner binder resin at a fixing temperature (e.g., 160 °C), a practically acceptable level of transparency is attained for a thin image of a single color but a multi-color or full-color image or a high-density image results in an unevenness due to thickness irregularity of multiple toner layers because the transparent resin layer 32 or 32B does not cause a sufficient degree of deformation as to absorb the thickness irregularity. Thus, the transparency is liable to be impaired. Further, because of a poor adhesiveness between the transparent resin layer 32 or 32B and the toner, a separation can occur within the toner layer to cause an offset.

The thickness of the transparent resin layer 32 or 32B can vary depending on the toner particle size but should be at least 0.5 times the average toner particle size so as to provide a sufficient transmittance to a low density portion having a thickness of only one toner particle. If the thickness exceeds three times the toner particle size, the amount of melting resin becomes large to result in obscure or strained images and also cracking of images due to flexure. The thickness is preferably 0.5 - 2 times the volume-average particle size of the toner.

More specifically, in case of using a toner having a volume-average particle size of 6 microns, it is preferred to use a transparent resin layer 32 or

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

-37-

32B having a thickness of 3- 12 microns and, in case of using a toner having a volume-average particle size of 15 microns, it is preferred to use a transparent resin layer 32 or 32B having a thickness of 7.5 - 30
5 microns.

The average particle size of a toner is measured by means of a Coulter counter in the present invention, while it may be measured in various manners.

10 Coulter counter Model TA-II (available from Coulter Electronics Inc.) is used as an instrument for measurement, to which an interface (available from Nikkaki K.K.) for providing a number-basis
distribution, and a volume-basis distribution and a
15 personal computer CX-1 (available from Canon K.K.) are connected.

For measurement, a 1 %-NaCl aqueous solution as an electrolytic solution is prepared by using a reagent-grade sodium chloride. For example, ISOTON[®]-II
20 (available from Coulter Scientific Japan K.K.) may be used therefor. Into 100 to 150 ml of the electrolytic solution, 0.1 to 5 ml of a surfactant, preferably an alkylbenzenesulfonic acid salt, is added as a
dispersant, and 2 to 20 mg of a sample is added
25 thereto. The resultant dispersion of the sample in the electrolytic liquid is subjected to a dispersion treatment for about 1 - 3 minutes by means of an





REPLACEMENT SHEET

03 MAR 1997

-38-

ultrasonic disperser, and then subjected to measurement of particle size distribution in the range of 2 - 40 microns by using the above-mentioned Coulter counter Model TA-II with a 100 micron-aperture to obtain a
5 volume-basis distribution and a number-basis distribution. From the measured particle size distribution, the volume-average particle size of the toner may be obtained.

Now, the color image forming method according
10 to the present invention will be described.

Figure 7 is a schematic sectional view of an electrophotographic apparatus 100 capable of producing a full-color image according to the method of the present invention. Referring to the figure, the
15 apparatus is roughly divided into a recording medium-conveying system (I) including a transfer drum 8 and shown in a right-to-middle part of the apparatus, a latent image-forming section (II) disposed at the middle of the apparatus adjacent to the transfer drum
20 8, and a rotary developing apparatus (III) as a developing means disposed adjacent to the latent image-forming section (II). The recording medium-conveying system (I) includes recording medium-supplying trays 101 and 102 disposed releasably in an
25 opening provided on the right side of the apparatus body 100; recording medium-feed rollers 103 and 104 disposed almost immediately above the trays 101 and

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



REPLACEMENT SHEET

03 MAR 1997

-39-

102; recording medium-supply guides 4A and 4B disposed adjacent to the rollers 103 and 104 and equipped with supply rollers 106; the transfer drum 8 rotatably disposed adjacent to the recording medium supply
5 roller 4B and having an abutting roller 7, a gripper 6, a recording medium-separation charger 12 and a separation claw 14 in this order from its upstream to downstream in the direction of its rotation indicated by an arrow along its outer periphery and also a
10 transfer charger 9 and a recording medium-separation charger 13 inside thereof; a conveyer belt means 15 disposed adjacent to the separation claw 14; a discharge tray 17 disposed adjacent to the conveying end of the conveyer belt means 15 and extending
15 outwardly from the apparatus body 100 so as to be releasable from the body 100; and a fixer 16 disposed adjacent to the tray 17.

The latent image-forming section (II) includes an electrostatic latent image-holding member
20 (i.e., photoconductive drum) 2 disposed rotatably in the direction of an arrow so that its outer periphery contacts the outer surface of the transfer drum 8, and a charge-removing charger 10, a cleaning means 11, a primary charger 3, and an imagewise exposure means
25 such as a laser beam scanner 19 including a polygonal mirror 19a for illuminating the outer surface of the photosensitive drum 2 to form an electrostatic latent

THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

-40-

image thereon, disposed in this order from the upstream to the downstream in the direction of the rotation in the vicinity of the photosensitive drum 2.

The rotary developing apparatus (III) includes a rotatably disposed housing (hereinafter called "rotating member") 18, and a yellow developing unit 18Y, a magenta developing unit 18M, a cyan developing unit 18C and a black developing unit 18BK respectively disposed within the rotating member 18 so as to visualize an electrostatic latent image formed on the outer periphery of the photosensitive drum 2 when placed at a position facing the outer surface of the photosensitive member 2.

A sequence of the operation of the image forming apparatus having an arrangement as described above will now be explained with respect to a full-color mode. When the photosensitive drum 2 is rotated in the arrow direction in Figure 7, the photoconductor on the drum 2 is uniformly charged by the primary charger 3 and then subjected to imagewise exposure with laser light E modulated by a yellow image signal based on an original (not shown) to form an electrophotographic latent image on the photosensitive drum 2, which is then developed by the yellow developing unit 18Y which has been placed at the developing position facing the photosensitive drum 2 by the rotation of the rotation member 18.

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

-41-

On the other hand, a recording medium conveyed through the supply guide 4A, supply roller 106 and supply roller 4B is held by the gripper 6 at a prescribed time and wound about the transfer drum 8 electrostatically by the abutting roller 7 and an electrode disposed opposite to the roller 7. The transfer drum 8 is rotated in the arrow direction synchronously with the photosensitive drum 2, and the developed image on the photosensitive drum 2 given by the yellow developing unit 18Y is transferred onto the recording medium at a place where the photosensitive drum 2 and the transfer drum 8 abut each other. The transfer drum 8 is further rotated so as to be ready for transfer of a subsequent color ("magenta" in the case shown in Figure 7).

The photosensitive drum is then charge-removed by the charge-removing charger 10, cleaned by the cleaning means 11, again charged by the primary charger 3 and then subjected to imagewise exposure based on a magenta image signal in the same manner as in the yellow exposure described above. During such electrostatic latent image formation on the photosensitive drum 2 based on the magenta image signal, the rotating member 18 is rotated so that the magenta developing unit 18M is disposed at the above-mentioned prescribed developing position. Then, a prescribed magenta developing operation is performed

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

03 MAR 1997

and the developed magenta image is transferred onto the recording medium already carrying the yellow image on the transfer drum 8 in the same manner as in the yellow development.

5 The above operation is repeated also with respect to a cyan color and a black color. After transfer of the four color images, a multi-color image is formed on the recording medium on the transfer drum 8, charge-removed with the respective chargers 12 and 10 13. Then, the recording medium carrying the multi-color image is released from the gripper 6, separated from the transfer drum 8 by the separation claw 14 and conveyed by the conveyer belt 15 to the fixer 16, where the multi-color image is fixed onto the 15 recording medium under heat and pressure. In this way, one full-color print sequence is completed to provide a prescribed full-color print image.

 The fixer 16 includes a hot fixing roller 161 and a pressing roller 162. The hot roller 161 may 20 preferably be covered with a surface layer of, e.g., silicone rubber or fluorine-containing resin, having an excellent releasability. The pressing roller 162 may preferably be surfaced with a fluorine-containing resin.

25 According to the present invention, in an image forming sequence as described above, a laminate film having a wax-absorbing layer is used as the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

recording medium. As a result, even when a toner containing a wax component is used to form a fixed toner image thereon, the exudation of the wax causing wax flowout is prevented on the fixed toner image.

5 Further, as the fixation is satisfactorily performed without oil application. The deterioration of the fixed image or the laminate film is avoided.

Accordingly, fixed images of a good quality can be formed on the laminate film suitably for an OHP use.

10 More specifically, the fixed image formed on the laminate film provides a color or full-color projected image which is free from graying as a whole and shows a good color reproducibility.

Hereinbelow, the present invention is

15 described more specifically based on Examples, wherein "part(s)" means "part(s) by weight".

Example 1

451 wt. parts of 0.1M- Na_3PO_4 aqueous solution was added to 7-9 wt. parts of deionized water,

20 followed by warming at 60 °C and stirring by a TK homomixer (mfd. by Tokushu Kika Kogyo K.K.) at 12,000 rpm. Then, 67.7 wt. parts of 1.0 M- CaCl_2 aqueous solution was gradually added thereto to form a dispersion medium containing $\text{Ca}_3(\text{PO}_4)_2$.

25	Styrene	170 wt.parts
	2-Ethylhexyl acrylate	30 "
	Paraffin wax (Tmp = 75 °C)	60 "

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



REPLACEMENT SHEET

03 MAR 1997


C.I. Pigment Blue 15	10 wt.parts
Styrene-methacrylic acid-	
methyl methacrylate copolymer	5 "
Di-tert-butylsalicylic acid	
5 metal compound	3 "

Of the above-listed ingredients, only C.I. Pigment Blue 15, di-tert-butyl salicylic acid metal compound and styrene were subjected to preliminary mixing by a mixer ("Ebara Milder", mfd. by Ebara Seisakusho K.K.). Then, the remaining ingredients were added, and the entire mixture was warmed at 60 °C and dissolved and dispersed with each other to form a monomer mixture. Then, while the mixture was held at 60 °C, 10 parts of dimethyl 2,2'-azobisisobutyrate (initiator) was added thereto to form a monomer composition.

Into the above-prepared dispersion medium under stirring in a 2 liter-flask, the above monomer composition was added and dispersed into particles under stirring by the TK homomixer at 10000 rpm for 20 min. at 60 °C in a nitrogen atmosphere. Then, the content was stirred by a paddle stirrer for 3 hours of reaction at 60 °C and 10 hours of polymerization at 80 °C.

After the polymerization, the product was cooled, acidified with hydrochloric acid to dissolve $\text{Ca}_3(\text{PO}_4)_2$, recovered by filtration, washed with water

THIS SHEET HAS BEEN
REPLACED

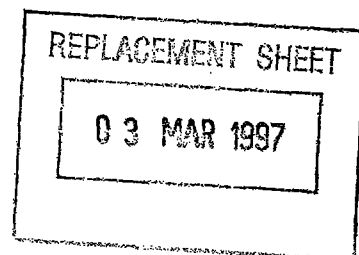

and dried to obtain a polymerization toner.

The thus-obtained toner was found to have a weight-average particle size of 8.2 microns and a sharp particle size distribution as measured by a
5 Coulter counter. A particle section was observed by a transmission electron microscope by stained ultramicrotomy, whereby a capsule structure having a surface layer consisting mainly of the styrene-acrylic resin and a core consisting mainly of the wax was
10 observed.

0.7 wt. part of hydrophobic silica having a BET specific surface area of $200 \text{ m}^2/\text{g}$ was externally added to 100 wt. parts of the toner. Further, 7 wt. parts of the toner was mixed with 93 wt. parts of a
15 Cu-Zn-Fe type ferrite carrier surface-coated with styrene-methyl methacrylate copolymer to obtain a developer.

The developer was charged in a re-modeled commercially available full-color copying machine
20 ("CLC-500", mfd. by Canon K.K.) and used to form an image on a laminate film as a recording medium prepared in the following manner under developing conditions including environmental temperature of 23°C and humidity of 65 %RH and a developing contrast of
25 320 volts.

The laminate film used was a laminate film A prepared by coating an about 100 micron-thick PET film





REPLACEMENT SHEET

03 MAR 1987

with an absorbing layer formed by CVD (chemical vapor deposition) in a known manner of inorganic fine powder comprising aluminum as a principal element. The laminate film A showed an average pore radius of 32 Å
5 and a BET specific surface area of 7 m²/g.

A yet-unfixed toner image on the laminate film formed by development and transfer in the re-modeled copying machine ("CLC-500") was fixed by passing through an external fixing machine (having the
10 same roller arrangement as the one in the "CLC-500" copying machine but having no oil applicator) at a fixing speed of 20 mm/sec.

As a result, a fixed toner image was formed without causing offset, in the form of a beautiful and
15 clear transparent image free from exudation or flowout trace of the wax component. The fixed toner image was used for projection by an OHP apparatus to provide a very beautiful cyan-colored projected image.

Example 2

20 A laminate film B was prepared in the same manner as in Example 1 except that a wax-absorbing layer was formed by replacing the inorganic fine powder with silica-type inorganic fine powder. The wax-absorbing layer of the laminate film B showed an
25 average pore radius of 55 Å and a BET specific surface area of 11 m²/g.

As a result of image formation on the

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

-47-

laminate film B otherwise in the same manner as in
Example 1, a good fixed image was formed without any
exudation trace of the wax component. As a result of
projection of the image by an OHP apparatus, a
5 beautiful projection image was obtained without
impairing the transparency.

Example 3

The toner production process in Example 1 was
repeated except that the C.I. Pigment Blue 15 was
10 replaced with 9 parts of C.I. Pigment Red 122 to
prepare a magenta toner, with 8 parts of C.I. Pigment
Yellow to prepare a yellow toner, and with 12 parts of
commercially available carbon black to prepare a black
toner.

15 Three developers were prepared by using these
three colors of toners in the same manner as in
Example 1, and totally 4 colors of developers
including the blue developer used in Example 1 were
used to form a yet un-fixed full-color toner image on
20 a laminate film A as used in Example 1 by development
and transfer in the re-modeled copying machine ("CLC-
500"). The full-color toner image was fixed by an
external fixing machine equipped with a pressure
roller of a silicone rubber and without oil
25 application.

The resultant fixed toner image was free of
offset or exudation trace of the wax component, thus

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

being excellent in quality.

The transparent film carrying the toner image was used for projection by an OHP apparatus to provide a beautiful full-color projection image. Further, the transparent film was obtained through fixation without oil application, so that it was free from stickiness and excellent in storage stability.

Example 4

A laminate film C was prepared by coating an about 100 micron-thick PET film with a coating liquid prepared by mixing 90 parts of alumina hydrate and 10 parts of polyvinyl alcohol with 1000 parts of water by bar coating, followed by drying at 150 °C for 10 min. in a drying oven to form an 8 micron-thick wax absorbing layer. The wax absorbing layer of the laminate film C showed an average pore radius of 50 Å and a BET specific surface area of 10 m²/g. Image formation and fixation was performed by using the laminate film C otherwise in the same manner as in Example 1, whereby a good fixed toner image was obtained free from exudation trace of wax component. As a result of projection by an OHP apparatus, a beautiful projection image was obtained without impairing transparency.

Comparative Example 1

Development, transfer and fixation of a toner image were performed by using a commercially available

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



REPLACEMENT SHEET

03 MAR 1997

-49-

OHP film (a corona discharged polyethylene terephthalate film) in place of the laminate film A otherwise in the same manner as in Example 1. As a result, no offset was caused due to the effect of the wax contained in the toner, but a wax exudation trace was observed at a rear end of the image and the image was accompanied with a low transparency as a whole.

Example 5

A laminate film D was prepared in the same manner as the laminate film A except that the amount of the inorganic fine powder was reduced to have a specific surface area of $0.08 \text{ m}^2/\text{g}$.

Development, transfer and fixation of a toner image were performed by using the laminate film D otherwise in the same manner as in Example 1, no offset was caused but there was observed a slight trace of wax exudation which was however within a practically acceptable extent.

Example 6

20	Styrene-butyl acrylate copolymer	100 parts
	Low-molecular weight polyolefin wax	7 parts
	Phthalocyanine pigment	4.5 parts
	Di-tert-butylsalicylic acid	
	metal compound	3 parts

25 The above ingredients were blended, melt-kneaded by a twin-screw kneading extruder, cooled and then pulverized by a jet stream pulverizer, followed

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

by classification by a pneumatic classifier to obtain a blue powdery toner having a weight-average particle size of 8.5 microns. Then, 100 parts of the toner was blended with 0.8 wt. part of negatively chargeable colloidal silica externally added thereto to obtain a cyan toner, which was then blended with ferrite particles coated with a fluorine-containing acrylic resin in a ratio of 1:9 to obtain a blue developer.

A yet-unfixed toner image was formed on the laminate film A used in Example 1 by using the above-prepared blue developer and the remodeled copying machine ("CLC-500"), and then fixed by an external fixing machine comprising an upper roller coated with a fluorine-containing resin and a lower silicone rubber roller but having no oil applicator, whereby a fixed image with a good transparency and no wax exudation trace was obtained without causing offset.

Example 7

A laminate film E was prepared by coating an about 100 micron-thick PET film with a film of silica formed by CVD and found to have an average pore radius of 26 Å and a BET specific surface area of 12 m²/g. Image formation and fixation were performed by using the laminate film E otherwise in the same manner as in Example 6, whereby a fixed toner image with a good transparency and with no wax exudation trace was obtained without causing offset.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

03 MAR 1997

Example 8

	Polyester	100 parts
	Paraffin wax	9 parts
	Phthalocyanine pigment	4.5 parts
5	Di-tert-butylsalicylic acid compound	3 parts

The above ingredients were subjected to melt-kneading, pulverization, classification, external addition of silica and blending with carrier in the same manner as in Example 6 to prepare a blue
10 developer.

A yet-unfixed toner image was formed and fixed on the laminate film A by using the blue developer otherwise in the same manner as in Example 6, whereby a fixed toner image with excellent
15 transparency was obtained without no wax exudation trace.

Example 9

Image formation and fixation were performed in the same manner as in Example 6 except for using
20 the laminate film C used in Example 4 instead of the laminate film A, whereby a fixed image with a good transparency and no wax exudation trace was formed without causing offset.

Comparative Example 2

25 A blue developer was prepared in the same manner as in Example 6 except for omission of the wax component, and used for image formation and fixation

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

-52-

in the same manner as in Example 6, whereby offset was caused, thus failing to provide a good fixed toner image.

Example 10

- 5 A laminate film F having a BET specific surface area of $0.09 \text{ m}^2/\text{g}$ was prepared similarly as the laminate film A used in Example 6 by changing the conditions for forming the absorbing layer.

Image formation and fixation were performed
10 on the laminate film thus formed otherwise in the same manner as in Example 6, whereby the resultant fixed toner image showed a somewhat lower transparency which was however at a practically acceptable level.

Example 11


- 15 A biaxially stretched 100 micron-thick polyethylene terephthalate (PET) film having a heat distortion temperature of 152°C and a maximum service temperature of 150°C was coated with a 16 micron-thick transparent resin layer formed by applying a
20 solution in acetone of a polyester resin (solubility parameter: about 11) having a storage modulus (G') of $8 \times 10^4 \text{ dyn/cm}^2$ at a temperature of 160°C and a frequency (ω) of 100 rad/sec and a softening point of 116°C by bar coating, followed by drying, and then
25 with a wax-absorbing layer formed in the same manner as in Example 1, to form a laminate film G.

Separately, a yellow toner powder was

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

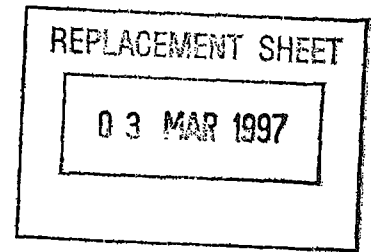

prepared by using 100 parts of a polyester resin P₂
(solubility parameter: about 11) having a storage
modulus (G') of 4×10^3 dyn/cm² at a temperature of 160
°C and a frequency (W) of 100 rad/sec and a softening
5 point of 105 °C, 9 parts of paraffin wax, 3.5 parts of
yellow colorant and 4 parts of a chromium-containing
organocomplex. The yellow toner powder showed a
volume-average particle size of 12 microns, a storage
modulus (G') of 8×10^3 dyn/cm² and a softening point of
10 107 °C.

Then, 0.4 part of hydrophobic colloidal
silica was externally added to 100 parts of the yellow
toner powder to form a yellow toner, which was then
mixed with ferrite particles in a weight ratio of
15 5:100 to obtain a yellow developer.

A uniform yet unfixed yellow toner image was
formed on the above-prepared laminate film G by using
the above yellow developer and image formation and
transfer and then fixed in an image forming apparatus
20 as shown in Figure 7 equipped with a hot pressure
fixer including a hot fixing roller 161 surfaced with
silicone rubber and a pressure roller 162 surfaced
with a fluorine-containing resin under the fixing
conditions of a hot fixing roller temperature of 160
25 °C, an average heating time of 25 msec and a pressing
force of 3 kg/cm² to form a fixed yellow toner image
having an image density (McBeth refractive



03 MAR 1997

densitometer) of 1.5.

The thus obtained fixed toner image showed no offset and was clear and free from wax exudation trace. When the toner image was projected by an OHP,
5 a very clear yellow transmitted light was obtained to provide a beautiful yellow projected image.

Example 12

A magenta toner powder having a volume-average particle size of 12 microns was prepared in
10 the same manner as in Example 11 except for using 1.9 parts of a magenta colorant. The magenta toner powder showed a storage modulus of 6×10^3 dyn/cm².

A red developer was prepared by using the magenta toner powder otherwise in the same manner as
15 in Example 11 and then used for image formation and fixation on the laminate film G in the same manner as in Example 11. The resultant fixed image caused no offset and was clear and free from wax exudation trace. When used for projection by an OHP apparatus,
20 the fixed toner image provided very clear red transmitted light and also be beautiful red projected image.

Example 13

A cyan toner powder having a volume-average
25 particle size of 12 microns was prepared in the same manner as in Example 11 except for using 5.0 parts of a cyan colorant. The magenta toner powder showed a



03 MAR 1997

-55-

storage modulus of 1×10^4 dyn/cm² and a softening point of 108 °C.

A blue developer was prepared by using the magenta toner magenta otherwise in the same manner as in Example 11 and then used for image formation and fixation on the laminate film G in the same manner as in Example 11. The resultant fixed image caused no offset and was clear and free from wax exudation trace. When used for projection by an OHP apparatus, the fixed toner image provided very clear blue transmitted light and also be beautiful blue projected image.

Example 14

A laminate film H was prepared in the same manner as in the laminate film G used in Example 11 except that the absorbing layer was replaced by an 8 micron-thick absorbing layer comprising alumina and polyvinyl alcohol prepared in the same manner as in Example 4.

Image formation and fixation were performed on the laminate film H otherwise in the same manner as in Example 11, whereby a clear fixed toner image free from wax exudation trace was obtained without offset. When projected by an OHP, the toner image provided a very beautiful yellow transmitted light and also a beautiful yellow projection image.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

Example 15

A PET film as used in Example 11 was coated with a methyl ethyl ketone solution of an epoxy resin having a solubility parameter of 10.5, a weight-
5 average molecular weight (M_w) of 20,000, a storage modulus (G') of 5×10^4 dyn/cm² and a softening point of 114 °C, followed by drying to form a 15 micron-thick transparent resin layer, and then coated with an absorbing layer formed in the same manner as in
10 Example 1.

Image formation and fixation were performed on the laminate film I so as to provide a fixed toner image having an image density of 0.5 otherwise in the same manner as in Example 11. The resultant fixed
15 toner image was clear, offset-free and also free from wax exudation trace. When projected by an OHP apparatus, the toner image provided a very clear yellow transmitted light and also a beautiful yellow projected image.

20 Example 16

A fixed magenta toner image was formed on the laminate film I in the same manner as in Example 15 except for using the magenta toner prepared in Example 12 so as to provide a fixed image density of 0.5.

25 The resultant fixed toner image was clear, offset-free and also free from wax exudation trace. When projected by an OHP apparatus, the toner image

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

provided a very clear red transmitted light and also a beautiful red projection image.

Example 17

A fixed cyan toner image was formed on the
5 laminate film I in the same manner as in Example 15
except for using the cyan toner prepared in Example 13
so as to provide a fixed image density of 0.5.

The resultant fixed toner image was clear,
offset-free and also free from wax exudation trace.
10 When projected by an OHP apparatus, the toner image
provided a very clear blue transmitted light and also
a beautiful blue projection image.

Examples 18 - 20

Yellow fixed toner image, magenta fixed toner
15 image and cyan fixed toner image was each formed on a
laminate film G having a transparent resin layer of a
polyester resin as used in Example 11 otherwise in the
same manner as in Examples 15 - 17, respectively. The
thus obtained fixed toner images provided further
20 better transmittances than in Examples 15 - 17 because
of the transparent layer comprising a polyester resin
of the same kind as the toner binder resin.

Example 21

A yellow fixed toner image having an image
25 density of 0.5 was formed on the laminate film H used
in Example 14 having a transparent layer of a
polyester resin and a wax-absorbing layer comprising

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

alumina particles and polyvinyl alcohol otherwise in the same manner as in Example 15. The toner image provided a further better transmittance than in Example 15 because the laminate film H had a

5 transparent resin layer comprising a polyester resin of the same kind as the toner binder resin.

Example 22

A sharp-melting polyester resin prepared by condensation polymerization of propoxide bisphenol and
10 fumaric acid and showing properties shown in the following Table 1 was used as a toner binder resin.

Table 1

15	Storage modulus (G') at 160 °C and 100 rad/sec	Softening point	Solubility parameter
	7 x 10	106 °C	about 11

20

100 parts of the above polyester resin and materials shown in Table 2 below were used to prepare toner powder of respective colors.

25

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

03 MAR 1997

-59-

Table 2

Toner	Colorant	Qty. (parts)	Charge controller	Qty. (parts)
Yellow	C.I. Pigment Yellow 17	3.5	Organochromium complex	4.0
Magenta	C.I. Solvent Red 52	1.0	ditto	4.0
	C.I. Solvent Red 49	0.9		
Cyan	Phthalocyanine pigment	5.0	ditto	4.4
Black	C.I. Pigment Yellow 17	1.2	ditto	4.4
	C.I. Pigment Red 5	2.8		
	C.I. Pigment Blue 15	1.5		

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

-60-

Toner powder of the respective colors showed properties given in Table 3 below.

Table 3


5

	Toner	Storage modulus (G') at 160°C, 100 rad/sec	Softening point
	Yellow	1×10^4 dyn/cm ²	109 °C
	Magenta	8×10^3	108
10	Cyan	1×10^4	109
	Black	1×10^4	109

100 parts each of the toner powders of
15 respective colors were respectively mixed externally
with 0.5 part of hydrophobic colloidal silica to form
respectively color toners, which were then
respectively mixed with a resin-coated ferrite carrier
in a weight ratio of 5:100 to provide respective
20 colors of developers. The four colors of developers
were charged in an image forming apparatus as shown in
Figure 7, and were used for image formation repeatedly
on the laminate film G and respectively in the same
manner as in Example 11, followed by fixing in the
25 same manner as in Example 11, to form a full-color
fixed toner image thereon. The laminate film carrying
the full-color fixed toner image was used for

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

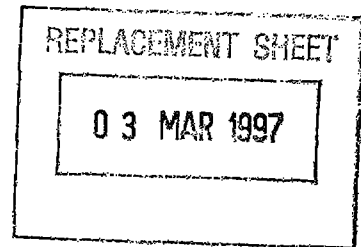

projection by an OHP apparatus, whereby a brilliant full-color projection image was formed on a screen and no wax exudation trace was observed.

Example 23

5 Image formation and fixation were performed to form a full-color fixed toner image on the laminate film H used in Example 14 instead of the laminate film G otherwise in the same manner as in Example 22. When used for projection by an OHP apparatus, the full-
10 color fixed toner image provided a brilliant full color image was projected on a screen and no wax exudation trace was observed.

Example 24

A laminate film J was prepared by replacing
15 the transparent resin layer of a polyester resin of the laminate film G with a 16 micron-thick layer of the polyester resin used as the binder resin in Example 16. A full-color toner image was formed on the laminate film J by using the yellow toner, magenta
20 toner, cyan toner and black toner in the same manner as in Example 16, and the toner image was fixed to cause color mixing under the conditions of a hot fixing roller temperature of 160 °C, an average heating time of 25 msec and a pressing force of 3
25 kg/cm², whereby a full-color fixed image free from wax exudation trace was formed without offset.

This Sheet Has Been Replaced



REPLACEMENT SHEET

03 MAR 1997

A laminate film suitable for providing a transparency for an OHP (overhead projector) is formed by disposing an absorbing layer on a substrate. The
5 absorbing layer functions to allow addition of a wax component to a toner so as to improve the color mixing characteristic and anti-offset characteristic of the toner without causing a wax exudation trace which is
liable to occur in a fixed toner image if the
10 absorbing layer is not provided.

15

20

25

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-62-

REPLACEMENT SHEET

03 MAR 1997

WHAT IS CLAIMED IS:

1. A laminate film for receiving a toner image
containing a wax component, comprising: an absorbing
layer for absorbing the wax component, and a substrate
5 supporting the absorbing layer.

2. The laminate film according to Claim 1,
wherein the wax component is one contained in a
polymerization toner obtained through suspension
10 polymerization.

3. The laminate film according to Claim 1,
wherein wax component is one contained in a toner
prepared through melt-kneading, pulverization and
15 classification of toner ingredients including the wax
component.

4. The laminate film according to Claim 1,
wherein the wax component has a melting point of 30 -
20 150 °C.

5. The laminate film according to Claim 1,
wherein the wax component has a melting enthalpy of 50
- 250 Joule/g.

25

6. The laminate film according to Claim 1,
wherein the wax component comprises at least one



* C L M S *

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-63-

REPLACEMENT SHEET

03 MAR 1997

member selected from paraffin wax, modified paraffin wax, polyolefin wax, modified polyolefin wax, higher fatty acid, metal salt of higher fatty acid and amide wax.

5

7. The laminate film according to Claim 1, wherein the absorbing layer is disposed on the substrate.

10 8. The laminate film according to Claim 7, wherein the absorbing layer comprises inorganic fine powder.

9. The laminate film according to Claim 8,
15 wherein the absorbing layer comprises inorganic fine powder bonded to the substrate by partial dissolution of the substrate or the inorganic fine powder.

10. The laminate film according to Claim 8,
20 wherein the absorbing layer comprises inorganic fine powder held by a binder layer on the substrate.

11. The laminate film according to Claim 8, wherein the absorbing layer comprises a film formed by
25 dry coating of the inorganic fine powder.

12. The laminate film according to Claim 8,



* C L H S *

THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

-64-

wherein the inorganic fine powder comprises activated alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.

5 13. The laminate film according to Claim 8, wherein the absorbing layer shows an average pore radius of 10 - 200 Å.

14. The laminate film according to Claim 8, which
10 shows a BET specific surface area of 0.1 - 30 m²/g.

15. The laminate film according to Claim 10, wherein the binder layer comprises polyvinyl alcohol and the inorganic fine powder comprises alumina
15 hydrate.

16. The laminate film according to Claim 8, wherein the inorganic fine powder has an average primary particle size of 0.001 - 0.1 micron.

20

17. The laminate film according to Claim 10, wherein the binder layer comprises a resin in a weight ratio of 1/1 to 1/50 with respect to the inorganic fine powder.

25

18. The laminate film according to Claim 7, wherein the absorbing layer is disposed on a surface



* C L M S *

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-65-

REPLACEMENT SHEET

03 MAR 1997

treated by plasma or corona discharge of the substrate.

19. The laminate film according to Claim 1,
5 wherein the absorbing layer is disposed on the substrate with an intermediate adhesive layer.

20. The laminate film according to Claim 19,
wherein the adhesive layer comprises polyester resin,
10 acrylic resin, methacrylate resin, styrene-acrylate copolymer or styrene-methacrylate copolymer.

21. The laminate film according to Claim 1,
wherein the absorbing layer is disposed on the
15 substrate with an intermediate transparent resin layer.

22. The laminate film according to Claim 21,
wherein the transparent resin layer comprises a resin
20 having a solubility parameter of 9.5 - 12.5 and a storage modulus (G') of 1×10^3 - 1×10^6 dyn/cm² as measured at a temperature of 160 °C and a frequency (ω) of 100 rad/sec.

23. The laminate film according to Claim 21,
wherein the transparent resin layer comprises a resin
having a storage modulus (G') larger than that of the



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-66-

REPLACEMENT SHEET

03 MAR 1997

toner, respectively as measured at a temperature of 160 °C and a frequency (ω) of 100 rad/sec.

24. The laminate film according to Claim 21,
5 wherein the absorbing layer comprises inorganic fine powder.

25. The laminate film according to Claim 24,
wherein the absorbing layer comprises inorganic fine
10 powder bonded the transparent resin layer by partial dissolution of the transparent resin layer or the inorganic fine powder.

26. The laminate film according to Claim 24,
15 wherein the absorbing layer comprises inorganic fine powder held by a binder layer on the transparent resin layer.

27. The laminate film according to Claim 24,
20 wherein the absorbing layer comprises a film formed by dry coating of the inorganic fine powder on the transparent resin layer.

28. The laminate film according to Claim 24,
25 wherein the inorganic fine powder comprises activated alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.



* C L M S *

THIS SHEET HAS BEEN
REPLACED



REPLACEMENT SHEET

03 MAR 1997

-67-

29. The laminate film according to Claim 24,
wherein the absorbing layer shows an average pore
radius of 10 - 200 Å.

5 30. The laminate film according to Claim 24,
which shows a BET specific surface area of 0.1 - 30
m²/g.

31. The laminate film according to Claim 26,
10 wherein the binder layer comprises polyvinyl alcohol
and the inorganic fine powder comprises alumina
hydrate.

32. The laminate film according to Claim 24,
15 wherein the inorganic fine powder has an average
primary particle size of 0.001 - 0.1 micron.

33. The laminate film according to Claim 26,
wherein the binder layer comprises a resin in a weight
20 ratio of 1/1 to 1/50 with respect to the inorganic
fine powder.

34. The laminate film according to Claim 21,
wherein the absorbing layer is disposed on a surface
25 treated by plasma or corona discharge of the
transparent resin layer.



* C L M S *

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-68-

REPLACEMENT SHEET

03 MAR 1997

35. The laminate film according to Claim 21,
wherein the absorbing layer is disposed on the
transparent resin layer with an intermediate adhesive
layer.

5

36. The laminate film according to Claim 35,
wherein the adhesive layer comprises polyester resin,
acrylic resin, methacrylate resin, styrene-acrylate
copolymer or styrene-methacrylate copolymer.

10

37. The laminate film according to Claim 21,
wherein the transparent resin layer is disposed on a
surface treated by plasma or corona discharge of the
substrate.

15

38. The laminate film according to Claim 21,
wherein the transparent resin layer is disposed on the
substrate with an intermediate adhesive layer.

20

39. The laminate film according to Claim 38,
wherein the adhesive layer comprises polyester resin,
acrylic resin, methacrylate resin, styrene-acrylate
copolymer or styrene-methacrylate copolymer.

25

40. The laminate film according to Claim 1,
wherein the absorbing layer is constituted as a
transparent resin layer comprising a transparent resin



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-69-

REPLACEMENT SHEET

03 MAR 1997

and inorganic fine powder.

41. The laminate film according to Claim 40,
wherein the inorganic fine powder has an average
5 primary particle size of 0.001 - 0.1 micron.

42. The laminate film according to Claim 40,
wherein the transparent resin has a solubility
parameter of 9.5 - 12.5 and a storage modulus (G') of
10 $1 \times 10^3 - 1 \times 10^6$ dyn/cm² as measured at a temperature of
160 °C and a frequency (w) of 100 rad/sec.

43. The laminate film according to Claim 40,
wherein the transparent resin has a storage modulus
15 (G') larger than that of the toner, respectively as
measured at a temperature of 160 °C and a frequency
(w) of 100 rad/sec.

44. The laminate film according to Claim 40,
20 wherein the inorganic fine powder comprises activated
alumina, aluminum hydroxide, alumina hydrate, silica
or titanium oxide.

45. The laminate film according to Claim 40,
25 wherein the absorbing layer shows an average pore
radius of 10 - 200 Å.



THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

46. The laminate film according to Claim 40,
which shows a BET specific surface area of 0.1 - 30
m²/g.

5 47. The laminate film according to Claim 40,
which has heat-resistant layer on the absorbing layer.

48. The laminate film according to Claim 47,
wherein the heat-resistant layer comprises polyvinyl
10 alcohol.

49. The laminate film according to Claim 40,
wherein the absorbing layer is disposed on a surface
treated by plasma or corona discharge of the
15 substrate.

50. The laminate film according to Claim 40,
wherein the absorbing layer is disposed on the
substrate with an intermediate adhesive layer.

20

51. The laminate film according to Claim 50,
wherein the adhesive layer comprises polyester resin,
acrylic resin, methacrylate resin, styrene-acrylate
copolymer or styrene-methacrylate copolymer.

25

52. The laminate film according to Claim 1,
wherein the toner image is a color toner image.



* C L M S *

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-71-

REPLACEMENT SHEET

03 MAR 1997

53. The laminate film according to Claim 1,
wherein the toner image is a full-color toner image.

54. A method for forming a fixed toner image on a
5 laminate film, comprising:

a developing step for developing an
electrostatic latent image on an electrostatic image-
bearing member with a toner containing a wax component
to form a toner image on the electrostatic image-
10 bearing member;

a transfer step for transferring the toner
image onto the laminate film, the laminate film
comprising an absorbing layer for absorbing the wax
component in the toner and a substrate supporting the
15 absorbing layer; and

a fixing step for fixing the toner image onto
the laminate film under heat and pressure while
absorbing the wax component in the toner with the
absorbing layer of the laminate film.

20

55. The method according to Claim 54, wherein the
toner comprises a polymerization toner containing the
wax component obtained through suspension
polymerization.

25

56. The method according to Claim 54, wherein
either toner is one prepared through melt-kneading,



* C L M S *

THIS SHEET HAS BEEN
REPLACED



03 MAR 1997

-72-

pulverization and classification of toner ingredients including the wax component.

57. The method according to Claim 54, wherein the wax component has a melting point of 30 - 150 °C.

58. The method according to Claim 54, wherein the wax component has a melting enthalpy of 50 - 250 Joule/g.

10

59. The method according to Claim 54, wherein the wax component comprises at least one member selected from paraffin wax, modified paraffin wax, polyolefin wax, modified polyolefin wax, higher fatty acid, metal salt of higher fatty acid and amide wax.

60. The method according to Claim 54, wherein the laminate film comprises an absorbing layer disposed on the substrate.

20

61. The method according to Claim 54, wherein the laminate film comprises the absorbing layer disposed on the substrate with an intermediate transparent resin layer comprising a transparent resin.

25

62. The method according to Claim 54, wherein the absorbing layer is constituted as a transparent resin



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



-73-

REPLACEMENT SHEET

03 MAR 1997

layer comprising a transparent resin and inorganic fine powder dispersed therein.

63. The method according to Claim 62, wherein the
5 toner contains a binder resin in addition to the wax component, and the transparent resin has a storage modulus (G') larger than that of the binder resin, respectively as measured at a temperature of 160 °C and a frequency (ω) of 100 rad/sec.

10

64. The method according to Claim 54, wherein the absorbing layer comprises inorganic fine powder.

65. The method according to Claim 64, wherein the
15 inorganic fine powder comprises activated alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.

66. The method according to Claim 64, wherein the
20 absorbing layer shows an average pore radius of 10 - 200 Å.

67. The method according to Claim 64, which shows a BET specific surface area of 0.1 - 30 m²/g.

25

68. The method according to Claim 64, wherein the inorganic fine powder has an average primary particle



* C L M S *

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

03 MAR 1997

**LAMINATE FILM FOR RECEIVING TONER IMAGE AND METHOD FOR
FORMING FIXED TONER IMAGE ON LAMINATE FILM**

ABSTRACT OF THE DISCLOSURE

A laminate film suitable for providing a transparency for an OHP (overhead projector) is formed by disposing an absorbing layer on a substrate. The absorbing layer functions to allow addition of a wax component to a toner so as to improve the color mixing characteristic and anti-offset characteristic of the toner without causing a wax exudation trace which is liable to occur in a fixed toner image if the absorbing layer is not provided.

FIGURE 1

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

03 MAR 1997

- 1 -

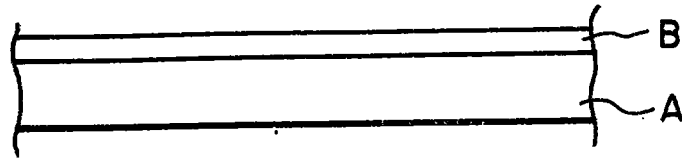


FIG. 1

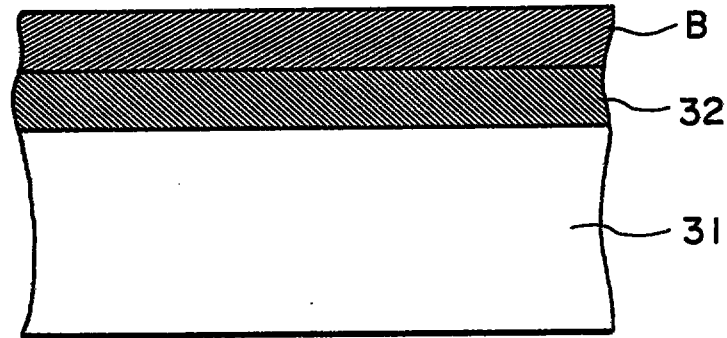


FIG. 2

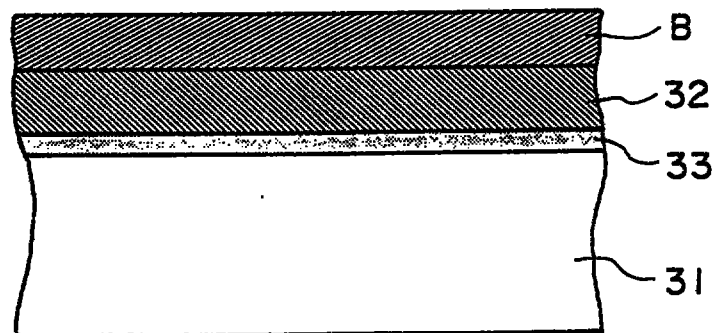


FIG. 3

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

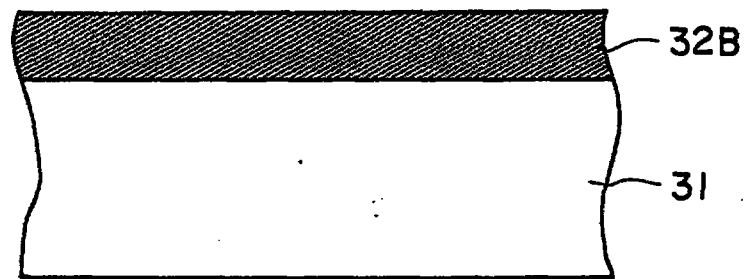
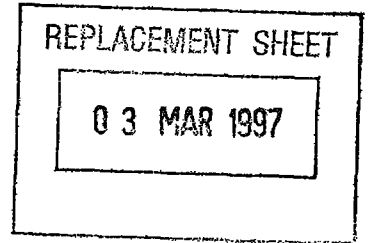


FIG. 4

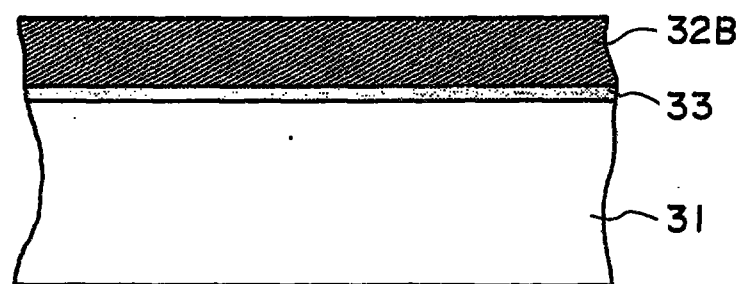


FIG. 5

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

03 MAR 1997

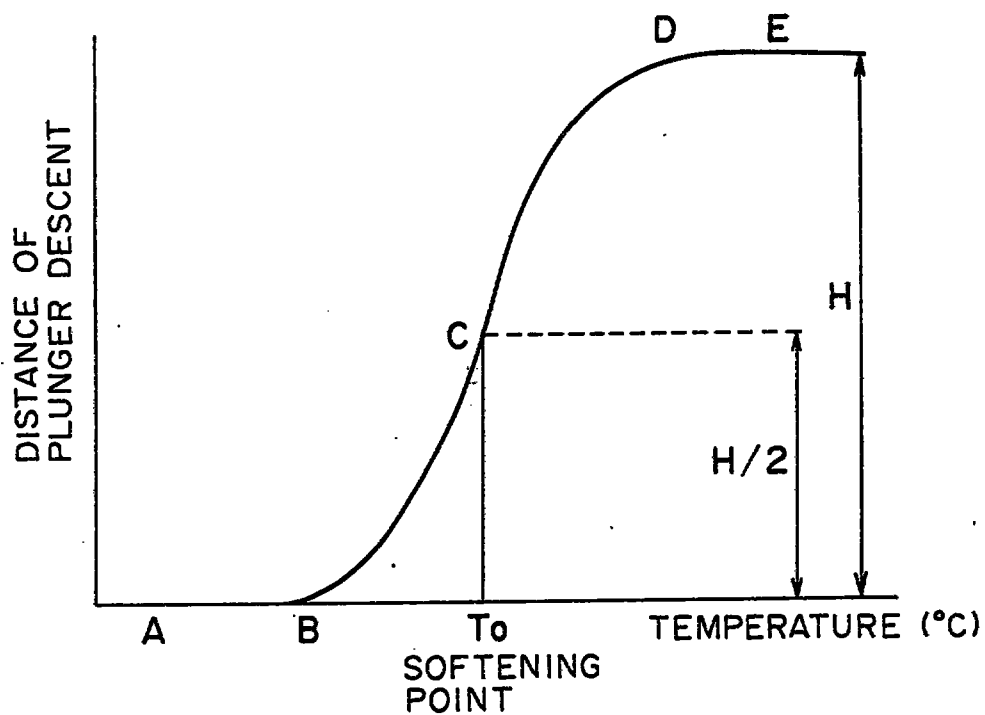


FIG. 6

P↑

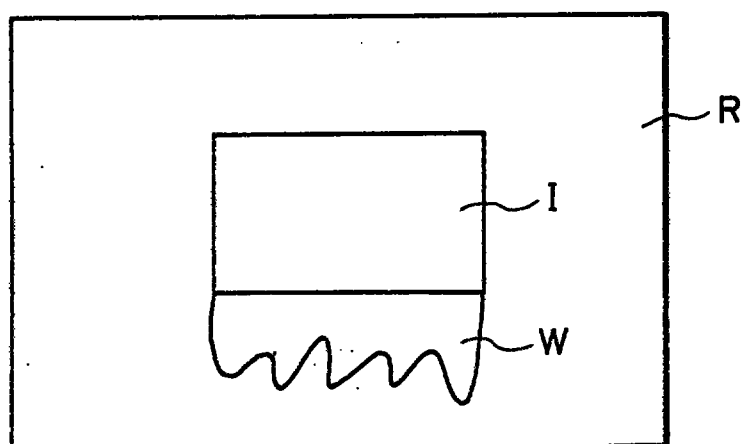


FIG. 8

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

03 MAR 1997

- 4 -

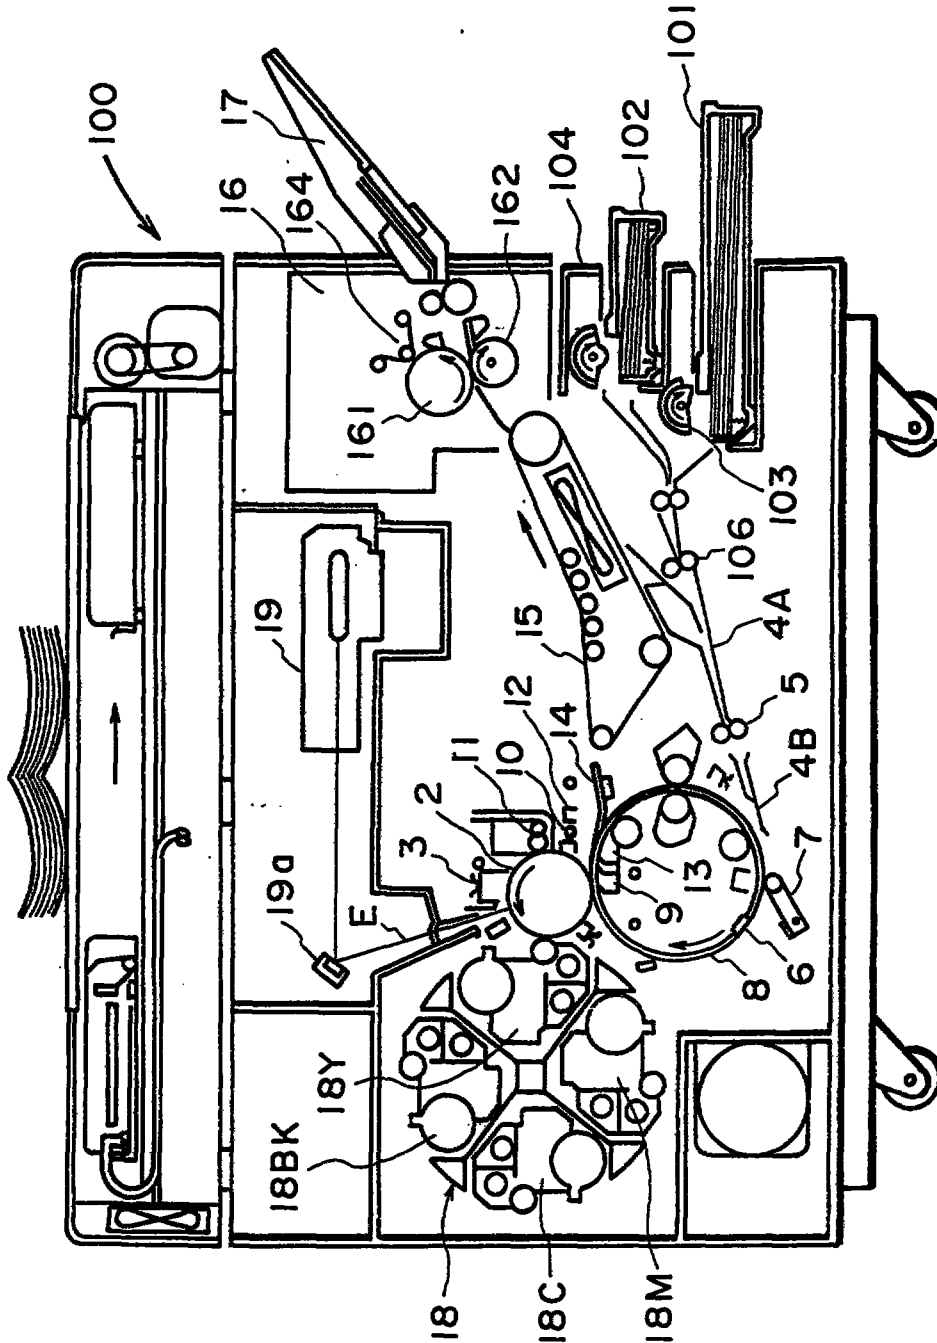


FIG. 7

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

9609078-2

REPLACEMENT SHEET

18 SEP 1999

REPLACEMENT SHEET

-1-

USE OF A LAMINATE FILM FOR RECEIVING A COLOR TONER
IMAGE AND METHOD FOR FORMING A FIXED COLOR TONER
IMAGE

The present invention relates to the use of a laminate film for receiving a toner image and a method for forming a fixed toner image on a laminate film, particularly a laminate film for receiving a color or full-color toner image according to an electrophotographic system and a method forming a fixed toner image of a color or full color on such a laminate film.

Conventionally, a full-color image has been formed generally in the following manner.

A photoconductive layer of a photosensitive drum as an electrostatic latent image holding member is uniformly charged by a primary charger and exposed imagewise to laser light modulated by a magenta image signal of an original to form an electrostatic latent image on the photosensitive drum, which is then developed with a magenta toner contained in a magenta developing unit to form a magenta toner image. The thus formed magenta toner image on the photosensitive drum is transferred by a transfer charger to a recording medium conveyed thereto.

On the other hand, the photosensitive drum after the transfer of the toner image to the recording

18 SEP 1999


-2-

medium is discharged (charge-removed) by a discharger, cleaned by a cleaning means and again charged by a primary charger, followed by similar formation of a cyan toner image and transfer of the cyan toner image to the recording member already carrying the above-mentioned magenta toner image. Then, similar operations are repeated for yellow and black colors so that toner image in totally four colors of magenta, cyan, yellow and black are transferred to the recording medium. Then, the recording medium having the four colors of toner images is supplied to fixing rollers where the toner images are fixed under the action of heat and pressure to form a fixed full-color toner image on the recording medium.

A toner used in a method of forming such a fixed color toner image is required to show excellent meltability on heating and color-mixing characteristic and is further preferred to show a low softening point and a low melt viscosity with a highly sharp-melting characteristic.

By using such a sharply melting toner, it is possible to obtain a color copy which shows excellent color reproducibility and is highly faithful to an original image.

However, such a sharply melting toner tends to have a high affinity with fixing rollers and is liable to cause offsetting onto a fixing roller.

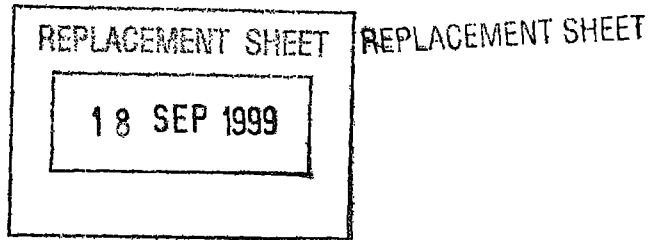


Particularly, in the case of a fixing means for use in full-color toner image formation, a plurality of toner layers including those of magenta, cyan, yellow and black, such offsetting is particularly liable to be caused.

For the above reason, it has been conventionally practiced to apply a release agent such as silicone oil onto a fixing roller so as to enhance the toner releasability of the fixing roller. In this case, however, the following problems are accompanied.

As a release agent such as oil is applied onto a fixing roller, the entire apparatus becomes complicated, and the life of the fixing roller can be shortened by the oil application.

On the other hand, as one of various demands for copying in recent years, a resinous laminate film such as a transparency film for an overhead projector (OHP) has been widely used as a type of recording material. If a toner image is fixed onto such a laminate film by using a fixing method using such an oil as described above, the applied oil is attached to the surface of the laminate film to remarkably deteriorate the quality of the laminate film for carrying the resultant toner image.


Accordingly, there are an increasing demand for a fixing system without requiring such oil application at the time of fixing and a novel toner

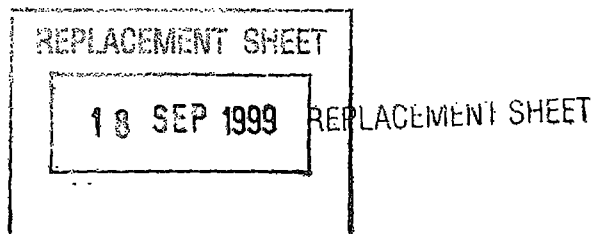

for realizing such a fixing system.

For the above-mentioned problems, there have been proposed a toner produced containing a release agent such as wax and a toner by suspension polymerization (Japanese Patent Publication (JP-B) 36-10231). In the suspension polymerization, a polymerizable monomer and a colorant (and also a polymerization initiator, a crosslinking agent, a charge control agent and other additives, as desired) are uniformly dissolved or dispersed to form a monomer composition, which is then dispersed in a dispersion medium (e.g., aqueous medium) containing a dispersion stabilizer by using an appropriate stirrer and simultaneously subjected to polymerization to form toner particles having a desired particle size.


In the suspension polymerization system, liquid droplets of the monomer composition are formed in a dispersion medium having a large polarity such as water, components having a polar group contained in the monomer composition tend to be present at the surfaces constituting an interface with the aqueous phase and non-polar components tend to be less present at the surface parts to form a so-called pseudo-capsule structure. By utilizing this process characteristic, it is possible to incorporate in a toner a low-melting point wax which cannot be used in another toner production process, such as the

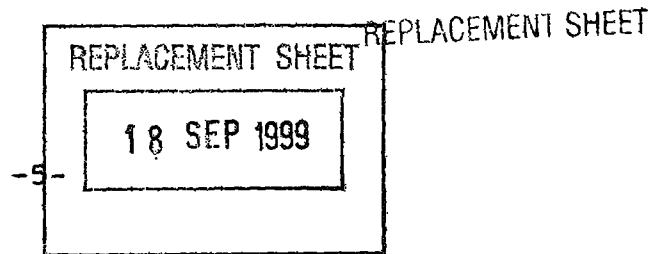

pulverization process.

Such a toner obtained by the polymerization process can satisfy both anti-blocking characteristic and low-temperature fixability which are generally contradictory with each other owing to the enclosure of a low-melting point wax. More specifically, the enclosed low-melting point wax does not lower the anti-blocking characteristic but promotes the internal thermal conductivity of the toner to realize low-temperature fixation. As a further preferable aspect, the wax melted at the time of fixation functions also as a release agent, so that undesirable high-temperature offset can be prevented without applying a release agent such as oil onto a fixing roller.

Thus, the polymerization toner enclosing wax shows advantageous performances at the time of fixation but has caused new problems when it is used in combination with a laminate film as the recording medium, that the clarity or transparency of the resultant image after the fixation is somewhat lowered and the enclosed wax as a release agent exudes at the time of fixing to flow onto the image. More specifically, the wax enclosed within the toner is caused to melt under the action of pressure and heat at the time of fixation and, as shown in Figure 8, is caused to flow on a resinous laminate film R as a recording medium to the rear side with respect to the

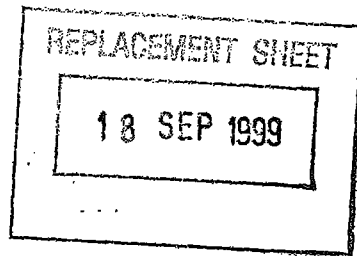


direction of progress P of the film, thus resulting in a flowout or exudation trace W of wax at the rear end of a fixed image I which is thus made awkward as an image for use in an OHP.

It may be conceived of decreasing the wax in order to prevent such wax flow but this results in a lower releasability of the toner. Thus, the above difficulty has been inevitably encountered if wax is used in an amount to provide a sufficient release characteristic.

This wax flow phenomenon is particularly noticeably observed in the case of resinous recording material such as an OHP film. This may be attributable to a fact that such a resinous recording medium shows a poor ability of absorbing melted wax to allow the wax to remain on the surface thereof and flow out to the image unlike a recording medium such as paper which has an abundant absorptivity sufficient to absorb melted wax to prevent the above-mentioned problems leading to deterioration of image quality.

Further, in the case of forming a fixed toner image on a recording medium such as a resinous laminate film, it has been generally frequently practiced to use a lower fixing speed for sufficient toner melting than fixation on an ordinary recording material such as paper as it is strongly desired to form a toner image having a high optical

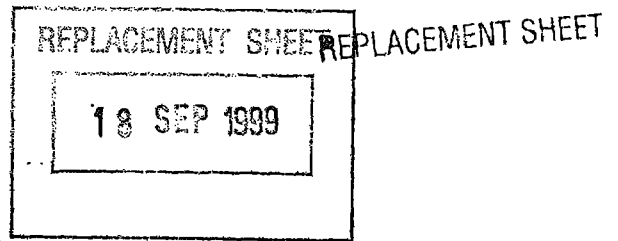

-7-


transmittance.

In this case, however, the toner on the recording medium is more liable to be offset to the fixing roller at the time of fixation, so that a larger amount of wax is required to be enclosed within the toner in order to show a sufficient releasability than in the case of fixation of a toner image on a recording medium such as paper.

Further, it has been confirmed that the use of a toner image by using such a toner enclosing wax rather results in a decrease in clarity of the resultant transparency film due to opacification caused by crystallization of the wax per se. This is presumably because the wax enclosed within the toner layer on a recording medium is caused to exude out of the toner at the time of passing between the fixing rollers to cover the whole or a part of the toner image and have an increased crystallinity, thus causing a remarkably lower optical transmittance.


Accordingly, it is urgently desired to exercise a measure by which a sufficient amount of wax can be contained without impairing the clarity of the resultant image and without causing a trace of wax flow even on a recording medium such as a resinous laminate film.

Further, in the case of forming a color or full-color toner image on a transparent laminate film

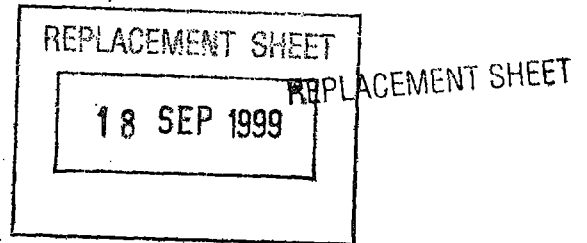

by using an electrophotographic system of the dry development type and projecting the toner image onto a screen by means of an OHP apparatus, the projected image can show a grayish tint as a whole to result in a very narrow range of color reproduction even when the image on the film shows a sufficient color reproducibility. This phenomenon is caused because the yet-unfixed toner image on a smooth laminate film is not provided with a sufficient fluidity by the heating at the time of fixation to retain its particle characteristic and the light incident to the toner image at the time of the projection is scattered to form a shadow on the screen. Particularly, at a halftone part showing a low image density, the absorption level by the dye or pigment in the toner is lowered due to a decrease in number of toner particles and the resultant absorption level becomes identical to a black absorption level due to scattering by toner particles, so that the reproduced color tint becomes grayish.

In the case of naked eye observation of a toner image on a recording medium such as plain paper, a light image reflected from an illuminated fixed toner image is observed, so that the image quality is little affected even if the toner surface retains some particle characteristic. In the case of observing or projecting a toner image onto a screen by transmitted

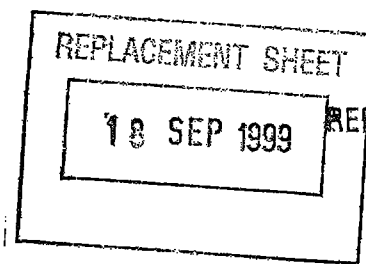

light as in an OHP apparatus, the image quality based on transmittance is remarkably impaired due to light scattering if the toner image retains some toner particle shape. Accordingly, the recording medium for use in an OHP apparatus is required to provide a fixed toner image which retains less particle characteristic and shows an improved optical transmittance while preventing an offset phenomenon onto the fixing roller at the time of fixation.

JP-A-57 049 954 discloses a transfer film comprising a plastic film on which a matting layer is provided comprising a matting agent having an oil absorption of 30 to 150 ml/100 g and a silane coupling agent.

Moreover, JP-A-57 066 459 discloses a transfer film comprising a plastic film and a matting layer disposed on one or both sides of said plastic film, said matting layer comprising an inorganic filler and a resin binder in a weight ratio of 0.4 to 0.8, wherein one of the components of the inorganic filler has high oil absorption.

Furthermore, JP-A-63-33749 discloses a transparent film for electrophotography comprising a heat-resistant transparent plastic film and a specific toner fixing layer disposed on at least one surface of the plastic film, wherein said toner fixing layer may comprise silica sol.

Moreover, JP-A-2 276 670 discloses a recording sheet comprising a transparent substrate and a porous ink-receiving layer formed thereon, which is constituted mainly of pseudo-boemite having a total volume of pores having a total diameter of 4 to 10 nm in the range from 0,1 to 4 cm³/g.

REPLACEMENT SHEET

18 SEP 1999

REPLACEMENT SHEET


SUMMARY OF THE INVENTION

An object of the present invention is to provide the use of a laminate film for receiving the toner image having solved the above-mentioned problems and also a method for forming a fixed toner image on such a laminate film.

An object of the present invention is to provide the use of a laminate film capable of forming a fixed toner image of excellent quality thereon without using oil at the time of fixation and a method for forming a fixed toner image on such a laminate film.

An object of the present invention is to provide the use of a laminate film capable of providing a fixed toner image with an excellent clarity or transparency and a method for forming a fixed toner image on such a laminate film.

Another object of the present invention is to

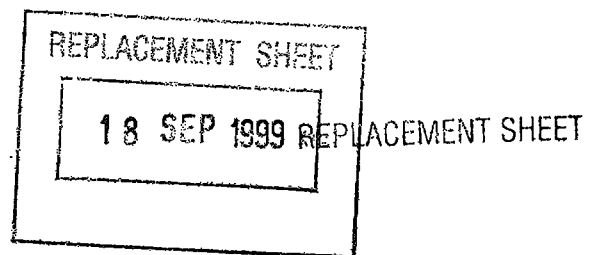

provide the use of a laminate film capable of forming thereon a fixed toner image of excellent quality while preventing flowout of a wax component contained in a toner at the time of fixation and a method for forming a toner image on such a laminate film.


A further object of the present invention is to provide the use of a laminate film capable of forming thereon a fixed toner image which provides a color or full-color projected image with good color reproducibility and free from graying in tint as a whole, and a method for forming a fixed toner image on such a laminate film.

A still further object of the present invention is to provide the use of a laminate film capable of forming a toner image thereon with excellent performance of preventing toner offset onto a fixing means at the time of fixation, and also a method for forming a fixed toner image on such a laminate film.

According to a principal aspect of the present invention, there is provided the use of a laminate film,

comprising: an absorbing layer for absorbing a wax component, and a substrate supporting the absorbing layer in an electrophotographic color image forming process including a step of fixing a color toner image formed of a color toner containing the wax component onto the laminate film under heat and pressure.

According to another aspect of the present invention, there is provided a method for forming a fixed color toner image on a laminate film, comprising:



a developing step for developing an electrostatic latent image on an electrostatic image-bearing member with a color toner containing a wax component to form a color toner image on the electrostatic image-bearing member;

a transfer step for transferring the color toner image onto the laminate film, the laminate film comprising an absorbing layer for absorbing the wax component in the color toner and a substrate supporting the absorbing layer; and


a fixing step for fixing the color toner image onto the laminate film under heat and pressure while absorbing the wax component in the color toner with the absorbing layer of the laminate film.

These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a sectional view showing an embodiment of the laminate film used according to the present invention.

Figures 2 - 5 are respectively a sectional view showing another embodiment of the laminate film used

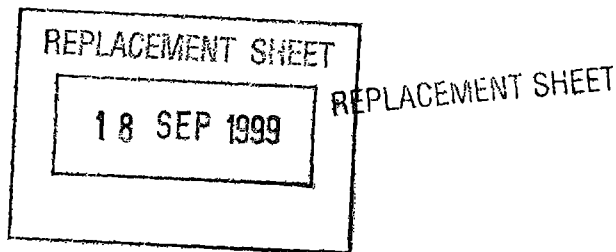

according to the present invention.

Figure 6 is a graph for illustrating a melting characteristic of a toner relating to the present invention.

Figure 7 is a schematic view of an image forming apparatus to which the laminate film according to the present invention is applicable and which is applicable for practicing an embodiment of the image forming method according to the present invention.


Figure 8 is a plan view for explaining a problem of wax flowout encountered when a fixed toner image is formed by using a conventional laminate film.

DETAILED DESCRIPTION OF THE INVENTION

The laminate film for use according to the present invention is characterized by having an absorbing layer for absorbing a wax component contained in a toner.

The absorbing layer may be formed by containing inorganic fine particles. The absorptivity of the wax component into the absorbing layer is related with an average pore radius (D) of the absorbing layer or by the inorganic fine powder per se, which is preferably in the range of 10 - 200 Å. Outside the average pore radius (D) range of 10 - 200 Å, the wax absorptivity is lowered.


The absorbing layer may preferably have a

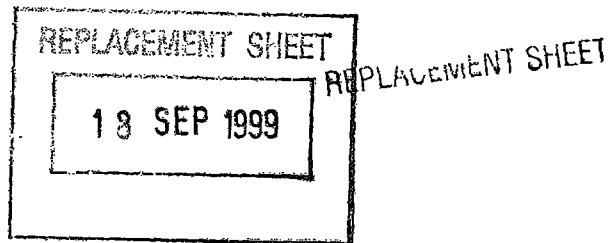

thickness in the range of 0.1 - 10 microns, more preferably 0.5 - 5 microns. If the thickness is below 0.1 micron, the wax absorptivity becomes insufficient and, if the thickness exceeds 5 microns, the laminate film is liable to be turbid to result in a lower transmittance.

The laminate film for use according to the present invention may preferably have a specific surface area of 0.1 - 30 m²/g which is generally attributable to that of the absorbing layer and the contribution of the base film is generally negligible. If the specific surface area of the laminate film is below 0.1 m²/g, the wax absorptivity of the absorbing layer becomes insufficient. If the specific surface area exceeds 30 m²/g, the transparency of the laminate film is lowered and most of the wax component contained in the toner is absorbed by the laminate film, thus failing to exhibit the intended release effect.


The average pore diameter of the inorganic fine powder or the absorbing layer and the specific surface area of the laminate film may be measured through nitrogen absorption according to the constant volume method and calculated based on the Kelvin formula and BET theory. The values described herein are values measured by using a commercially available gas absorption meter ("Autosorb 1", available from Yuasa Ionic K.K.). For measurement of the specific

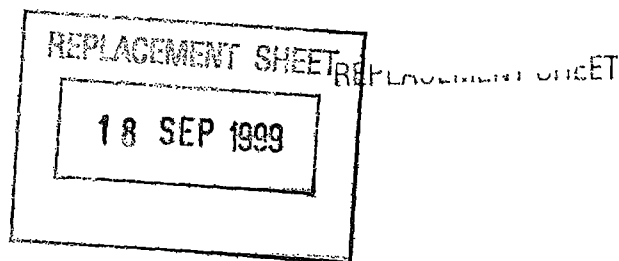

surface area of the laminate film, a laminate film sample measuring 100 mm x 100 mm is cut into pieces each measuring 5 x 5 mm, and all the cut pieces are placed in the gas absorption meter.

The structure of the laminate film used according to the present invention will be described with reference to Figure 1.

Referring to Figure 1, a laminate film used according to the present invention comprises a base film A of a transparent resin as a substrate and an absorbing layer B formed on the base film A. The base film A is required to have a heat resistance so as not to cause a noticeable thermal deformation due to heating for heat fixation or heat and pressure fixation. More specifically, the base film A may preferably have a heat distortion temperature of 145 °C or higher, more preferably 150 °C or higher, as measured under the condition of 4.6 Kg/cm² according to ASTM D648. Specific examples of such a base film A may include films of polyethylene terephthalate (PET), polyester, polyamide and polyimide showing a heat resistance represented by a heat distortion temperature of 145 °C or higher under the above condition and a maximum usable temperature of 100 °C or higher. Among these, polyethylene terephthalate film is particularly preferred in view of its heat resistance and transparency. The base film is

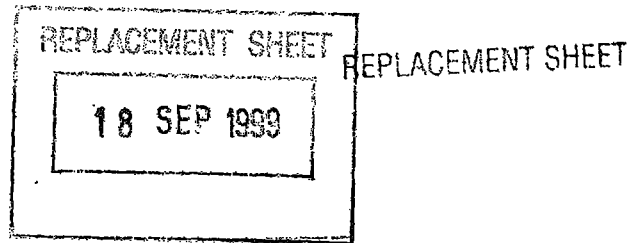


required to have a thickness not causing wrinkles even when softened under heating for fixation. A thickness of 50 microns or more is sufficient, e.g., in case of polyethylene terephthalate. Even a transparent film can cause a lowering in transmittance if it becomes excessively thick. For these reasons, the base film A may preferably have a thickness of 50 - 300 microns, more preferably 100 - 200 microns, further preferably 70 - 150 microns.

Referring to Figure 1, the absorbing layer B may be formed by application or adhesion of inorganic fine powder on the base film so as to provide fine pores.

The inorganic fine powder may for example comprise activated alumina, aluminum hydroxide, hydrated alumina, silica and titanium oxide. These materials may be used singly or in mixture of two or more species.

The inorganic fine powder may preferably have an average primary particle size of 0.001 - 0.1 micron, more preferably 0.001 - 0.05 micron. If the particle size is below 0.001 micron, the cohesive force between particles becomes too large to form a uniform absorbing layer and, if the particle size exceeds 0.1 micron, the wax absorptivity or transparency of the absorbing layer is impaired.

The absorbing layer B may for example be

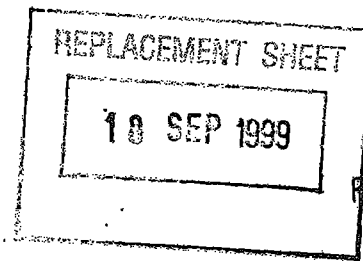

REPLACEMENT SHEET

formed on the absorbing layer A by dispersing such an inorganic fine powder in an appropriate solvent together with an appropriate binder, as desired, to form a coating liquid and applying the coating liquid onto the base film A by known coating methods, followed by drying.

The solvent can have a solubility of slightly dissolving the surface of the base film A or the inorganic fine powder.


Examples of the binder may include known film-forming resins, such as polyester resins, vinyl resin, butadiene resins, epoxy resins, polyamide resins and polyurethane resins.

The binder resin and the inorganic fine powder may be used in a weight ratio of 1:1 - 1:50, more preferably 1:3 - 1:20.

The absorbing layer B can also be formed by coating the base film A with a layer of the inorganic fine particles by known deposition methods such as CVD (chemical vapor deposition) and PVD (physical vapor deposition).


In order to enhance the adhesion between the base film A and the inorganic fine powder or binder resin, it is possible and preferred to apply a surface treatment such as plasma or corona discharge, or a primer layer to the base film A.

Explanation is made on a polymerization toner



as a preferred example of a toner used in combination with the laminate film according to the present invention. Such a polymerization toner may be produced in the following manner.


Additives such as a release agent, a colorant and a charge control agent are added in a polymerizable monomer, and the mixture is heated until the release agent is dissolved or melted and is subjected to uniform dissolution or dispersion by using a mixer such as a homogenizer or an ultrasonic disperser to form a monomer composition, which is then dispersed in an aqueous medium containing a dispersion stabilizer at a temperature nearly equal to that of the monomer composition by using a mixer, such as an ordinary stirrer. The stirring speed and time are preferably adjusted so as to provide the resultant monomer droplets with a prescribed toner size of generally 30 microns or smaller, and thereafter the stirring is continued at such an intensity as to retain the particle size and prevent the precipitation of the particles under the action of a dispersion stabilizer. The polymerization temperature is set to a temperature below the precipitation temperature of the release agent, and a polymerization initiator is added to effect the polymerization. After the reaction, the produced toner particles are washed, recovered by filtration and dried. In the suspension

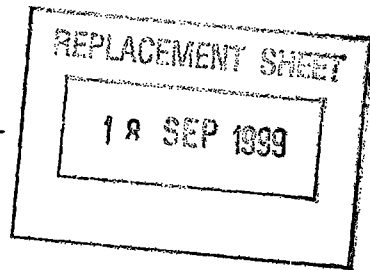

polymerization, it is generally preferred to use 300 - 3000 wt. parts of water as a dispersion medium per 100 wt. parts of the monomer composition.

Examples of the polymerizable monomer usable for constituting the polymerization toner may include: styrene-type monomers, such as styrene, o-methylstyrene, m-methylstyrene, p-methylstyrene, p-methoxystyrene, and p-ethylstyrene; acrylates, such as methyl acrylate, ethyl acrylate, n-butyl acrylate, isobutyl acrylate, n-propyl acrylate, n-octyl acrylate, dodecyl acrylate, 2-ethylhexyl acrylate, stearyl acrylate, 2-chloroethyl acrylate and phenyl acrylate; methacrylates, such as methyl methacrylate, ethyl methacrylate, n-propyl methacrylate, n-butyl methacrylate, isobutyl methacrylate, n-octyl methacrylate, dodecyl methacrylate, 2-ethylhexyl methacrylate, stearyl methacrylate, phenyl methacrylate, dimethylaminoethyl methacrylate, and diethylaminoethyl methacrylate; acrylonitrile, methacrylonitrile, and acryl amide.

These monomers may be used singly or in mixture of two or more species. Among the above monomers, styrene or a styrene derivative may preferably be used singly or in mixture with another monomer in view of developing characteristics and successive image forming characteristics of the resultant toner.




REPLACEMENT SHEET

The dispersion medium for producing the polymerization toner may be formed by dispersing a stabilizer, such as polyvinyl alcohol, gelatin, methyl cellulose, methyl hydroxypropyl cellulose, ethyl cellulose, sodium salt by carboxymethyl cellulose, polyacrylic acid or its salt, starch, calcium phosphate, aluminum hydroxide, magnesium hydroxide, calcium metasilicate, barium sulfate or bentonite in an aqueous medium. The stabilizer may preferably be used in an amount of 0.2 - 20 wt. parts per 100 wt. parts of the polymerizable monomer.

In order to finely disperse such a stabilizer, 0.001 - 0.1 wt. part of a surfactant may be used. The surfactant functions to promote the action of the dispersion stabilizer, and examples thereof may include: sodium dodecylbenzenesulfonate, sodium tetradecyl sulfate, sodium pentadecyl sulfate, sodium octyl sulfate, sodium oleate, sodium laurate, potassium stearate, and calcium oleate.


It is further preferred to add a polymer or copolymer having a polar group in the monomer composition for polymerization. Further, it is preferred in the present invention that a monomer composition to which a polymer, copolymer or cyclic rubber having a polar group has been added is suspended for polymerization in an aqueous medium which contains a dispersant chargeable to a polarity



REPLACEMENT SHEET

reverse to that of the polar polymer, etc. More specifically, a cationic (or anionic) polymer, copolymer or cyclic rubber contained in the monomer composition exerts an electrostatic attraction force at the surfaces of droplets of the monomer composition under polymerization with an anionic (or cationic) dispersant of the reverse chargeability, so that the surfaces of the droplets are covered with the dispersant to prevent the coalescence of the droplets and stabilize the dispersion, and the added polar polymer, etc., are caused to gather at the surfaces of the droplets to form a kind of shell, thus providing toner particles of a pseudo-capsule structure. A toner satisfying both fixability and anti-blocking characteristic which are generally contradictory with each other can be obtained by forming a shell of a polar polymer (or copolymer or cyclic rubber) having a relatively high molecular weight so as to provide excellent anti-blocking and anti-offset characteristic and a core of a component having a relatively low molecular weight contributing to an improved fixability through the polymerization. Examples of the polar polymer or copolymer and the reversely chargeable dispersant may be enumerated below:

(1) Cationic polymers or copolymers, inclusive of: homopolymers of a nitrogen-containing monomer, such as dimethylaminoethyl methacrylate or

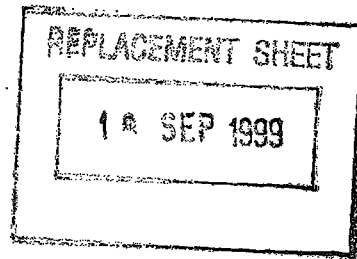

diethylaminoethyl methacrylate, and copolymers of such a nitrogen-containing monomer with another monomer, such as styrene or an unsaturated carboxylic acid ester.


(1) Anionic polymers or copolymers, inclusive of: homopolymers of a nitrile monomer such as acrylonitrile, a halogen-containing monomer such as vinyl chloride, an unsaturated carboxylic acid such as acrylic acid or methacrylic acid, an unsaturated dibasic acid, an unsaturated dibasic acid anhydride, and a nitro group-containing monomer, and also copolymers of these monomers with a styrene-type monomer.

Cyclic rubber can be used instead of the above-mentioned polar polymer or copolymer.

(3) Anionic dispersants including silica fine powder, particularly colloidal silica having a BET specific surface area of $200 \text{ m}^2/\text{g}$ or larger.


(4) Cationic dispersants including hydrophilic positively chargeable silica fine powder, such as aminoalkyl-modified colloidal silica, preferably having a BET specific surface area of $200 \text{ m}^2/\text{g}$ or larger, and aluminum hydroxide.

Such a dispersant may preferably be used in a proportion of 0.2 - 20 wt. parts, particularly 0.3 - 15 wt. parts, per 100 wt. parts of the polymerizable monomer composition.

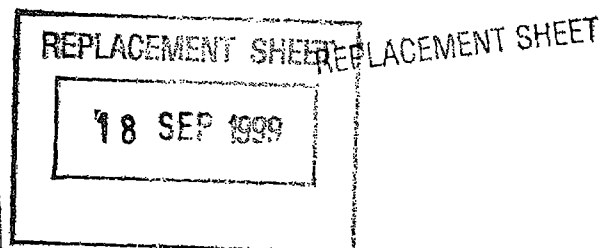

In the present invention, it is preferred to incorporate a charge control agent in the toner to control the chargeability of the toner. The charge control agent may be those having little polymerization inhibiting characteristic and little transferability to an aqueous medium selected from known charge control agents. Examples of positive charge control agents may include: nigrosine dyes, triphenylmethane dyes, quaternary ammonium salts, amine compounds and polyamine compounds. Examples of negative charge control agents may include: metal-containing salicylic acid compounds, metal-containing monoazo dye compounds, styrene-acrylic acid copolymer, and styrene-methacrylic acid copolymer.


The colorant contained in the toner used in the present invention may be known ones. Examples thereof may include: carbon black; iron black; dyes, such as C.I. Direct Red 1, C.I. Direct Red 4, C.I. Acid Red 1, C.I. Basic Red 1, C.I. Mordant Red 30, C.I. Solvent Red 49, C.I. Solvent Red 52, C.I. Direct Blue 1, C.I. Direct Blue 2, C.I. Acid Blue 9, C.I. Acid Blue 15, C.I. Basic Blue 3, C.I. Basic Blue 5, C.I. Mordant Blue 7, C.I. Direct Green 6, C.I. Basic Green 4, and C.I. Basic Green 6; and pigments, such as Lead Yellow, Cadmium Yellow, Mineral Fast Yellow, Navel Yellow, Naphthol Yellow S, Hansa Yellow G, Permanent Yellow NCG, Turtladine Lake, Molybdenum

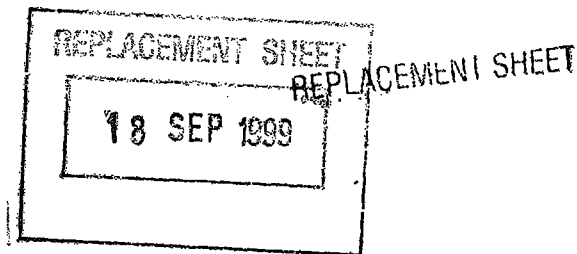

Orange, Permanent Orange GTR, Benzidine Orange G, Cadmium Red, Permanent Red 4R, Watching Red Ca-salt, Brilliant Carmine 3B, Fast Violet B, Methyl Violet Lake, Ultramarine, Cobalt Blue, Alkali Blue Lake, Victoria Blue Lake, quinacridone, disazo-type yellow pigments, Phthalocyanine Blue, Fast Sky Blue, Pigment Green B, Malachite Green Lake, and Final Yellow Green G. When the toner is produced by polymerization, it is necessary to pay attention to the polymerization prohibiting property and transferability to water of a colorant used. For this reason, it is preferred to apply to the colorant used a surface treatment, such as a hydrophobicity-imparting treatment with a substance free from polymerization-inhibiting characteristic.

Examples of the wax contained as a release agent in the toner used in the present invention may include: paraffin-type waxes, polyolefin-type waxes and modified products (e.g., oxidation or grafting products) of these, higher fatty acids and their metal salts and amide wax, but these are not exhaustive.

The wax used in the present invention may preferably have a melting point in the range of 30 - 150 °C, more preferably 40 - 140 °C. If the melting point is below 30 °C, the anti-blocking characteristic and shape-retaining characteristic of the resultant

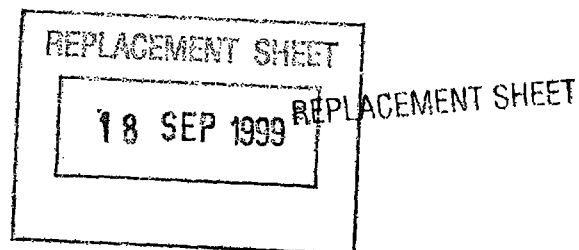


toner becomes insufficient. If higher than 150 °C, a sufficient release effect is not exhibited. The melting point herein is one measured as a temperature giving a maximum heat absorption peak on a DSC (differential scanning calorimeter) curve.

The wax used in the present invention may preferably be one showing a melting enthalpy ΔH of 50 - 250 J/g.

Such a wax may preferably be used in a proportion of 0.1 - 50 wt. parts, more preferably 1 - 45 wt. parts, further more preferably 5 - 40 wt. parts, per 100 wt. parts of the polymerizable monomer. Below 0.1 wt. part, little release effect is exhibited. Above 50 wt. parts, the stability in production is lowered, and the anti-blocking characteristic and storage stability are also liable to be lowered.

Examples of the polymerization initiator may include: azo or diazo type polymerization initiators, such as 2,2'-azobis(2,4-dimethylvaleronitrile), 2,2'-azobisisobutyronitrile, 1,1'-azobis(cyclohexane-1-carbonitrile) and 2,2'-azobis-4-methoxy-2,4-dimethylvaleronitrile; and peroxide type polymerization initiators, such as benzoyl peroxide, methyl ethyl ketone peroxide, diisopropyl peroxy carbonate, cumene hydroperoxide, 2,4-dichlorobenzoyl peroxide, and lauroyl peroxide. It is also possible to use a redox type initiator comprising

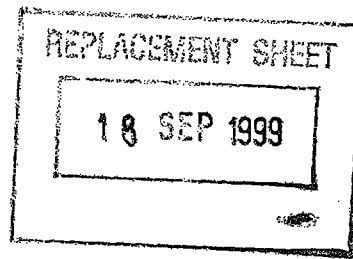

REPLACEMENT SHEET


a peroxide as described above and a reducing agent, such as dimethylaniline, a mercaptan, a tertiary amine, an iron (II) salt or sodium sulfite.

The polymerization initiator may be appropriately used so as to provide a desired molecular weight, and the amount thereof in 0.1 - 10 wt. % of the polymerizable monomer may generally be sufficient.

Some further explanation is given to the wax (release agent), polymerization initiator and polymerization temperature.

When a wax having a low melting or softening point, such as paraffin wax, is used, the wax is precipitated from the polymerizable monomer composition at a low temperature, and the polymerization temperature is lowered correspondingly. In such a case, it is preferred to use an initiator having a short half-life, such as a redox initiator or 2,2'-azobis-4-methoxy-2,4-dimethylvaleronitrile.

In the case of using a wax having a high melting or softening point, such as polyolefin wax, it is preferred to use an autoclave for dissolving or melting the wax in the polymerizable monomer composition and use a polymerization initiator, such as 2,2'-azobis(2,4-dimethylvaleronitrile) or dimethyl-2,2'-azobisisobutyrate as the wax has a higher precipitation temperature than in the above-mentioned




REPLACEMENT SHEET

case of a wax having a low melting point or softening point, such as paraffin wax.

In the present invention, it is also possible to use a toner obtained through kneading, pulverization and classification in addition to the above-mentioned polymerization toner. The binder resin for this purpose may be homopolymer or copolymer of the above-mentioned monomers for producing the polymerization toner inclusive of styrene-type monomers and acidic monomers, such as acrylic acid, methacrylic acid and maleic acid and esters thereof, polyester, polysulfonate, polyether, polyurethane, or a mixture of the above resins. Such a so-called pulverization toner may be prepared by mixing and melt-kneading the binder resin with other toner components by using a hot kneading means, such as hot rollers, a kneader or an extruder, followed by mechanical pulverization and classification.

In the toner used in the present invention, it is possible to add known additives for imparting various characteristics. Such additives may preferably a particle size which is 1/10 or less of the volume-average particle size of the resultant toner particles in view of the durability of the resultant toner. The particle size of the additive referred to herein means an average particle size obtained by surface observation of toner particles

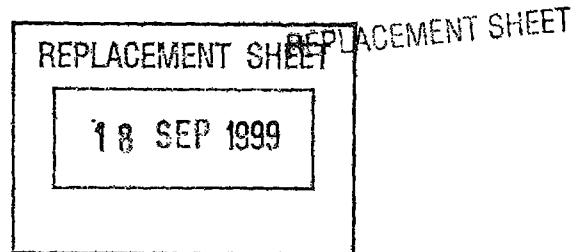

through an electron microscope. Examples of such additives for imparting various properties may include the following:


1) Fluidity-imparting agent: metal oxides (such as silicon oxide, aluminum oxide, and titanium oxide), carbon black, fluorinated carbon. It is preferred that these have been subjected to a hydrophobicity-imparting treatment.

2) Abrasive: metal oxides (such as strontium titanate, cerium oxide, aluminum oxide, magnesium oxide, and chromium oxide), nitrides (such as silicon nitride), carbides (such as silicon carbide), metal salts (such as calcium sulfate, barium sulfate, and calcium carbonate).

3) Lubricant: powder of fluorine-containing resin (such as polyvinylidene fluoride and polytetrafluoroethylene), fatty acid metal salts (such as zinc stearate and calcium stearate).

4) Charge-controlling particles: particles of metal oxides (such as tin oxide, titanium oxide, zinc oxide, silicon oxide, and aluminum oxide), carbon black.

These additives may preferably be added in an amount in the range of 0.1 - 10 wt. parts, more preferably 0.1 - 5 wt. parts, per 100 wt. parts of the toner particles. These additives may be added singly or in combination of two or more species.




REPLACEMENT SHEET

In order to provide a laminate film for the use according to the present invention having good transmittance and color-reproducibility of the projected image, it is preferred to provide on the surface of a substrate heat-resistant film a layer of a transparent resin which is compatible with a binder resin constituting toner particles used for color image formation and has a thermal fusion characteristic different from that of the toner binder resin.

Figures 2 and 3 illustrate such embodiments.


Referring to Figures 2 and 3, each laminate film comprises a transparent base film 31 which is similar to the base film A in the embodiment shown in Figure 1, and thereon a transparent resin layer 32 as described above for improving the transmittance of the fixed color image. It is preferred that the transparent resin layer 32 is compatible with the toner binder resin constituting toner particles forming a color image at the temperature of hot fixation. The compatibility with the toner binder resin means that no boundary is formed between the resin of the transparent resin layer 32 and the toner binder resin in the fixed image. As a measure of selection, it is preferred that the resin of the transparent resin layer 32 has a solubility parameter in the range of ± 1.5 , more preferably ± 1.0 , with solubility parameter of the toner binder resin as the



REPLACEMENT SHEET

principal toner binder resin (constituting 50 wt. % or more of the whole binder resin). The solubility parameters of various resins are disclosed in many publications inclusive of polymer handbooks. For example, when a polyester resin having a solubility parameter of about 11.0 is used as a principal toner binder resin, the resin of the transparent resin layer 32 may suitably be a thermoplastic resin, such as polyester resin, polymethyl methacrylate resin, epoxy resin, polyurethane resin, vinyl chloride resin or vinyl chloride-vinyl acetate copolymer resin having a solubility parameter of 11.0 ± 1.5 . It is particularly preferred that the resin of the transparent resin layer 32 is composed of a resin of the same species as the principal toner binder resin.

The resin used in the transparent resin layer 32 may preferably have a storage modulus (G') of 1×10^3 - 1×10^6 dyn/cm², more preferably 5×10^3 - 5×10^5 dyn/cm², as measured at 160 °C and a frequency (ω) of 100 rad/sec. If the storage modulus (G') is below 1×10^3 dyn/cm², an offset phenomenon is liable to occur when a toner image is fixed by a hot pressure roller and the transparent resin layer 32 is liable to be partially peeled off the base film 31 and be damaged. If the storage modulus (G') exceeds 1×10^6 dyn/cm², a toner image is allowed to enter only a very slight degree into the transparent resin layer 32 under

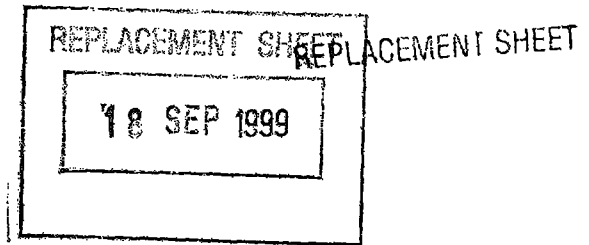


fixation by a hot pressure roller, so that the resultant toner image becomes grayish as a whole.

The storage modulus (G') values for the resin constituting the transparent resin layer referred to herein are based on values measured by using a mechanical spectrometer ("RMS-800", available from Rheometrics Inc.) under the conditions including a frequency (ω) of 100 rad/sec and an automatically determined strain rate. The transparent resin layer 32 may have a thickness of 3 - 30 microns, preferably 8 - 15 microns, while the optimum thickness can vary depending on the particle size of the toner to be fixed thereon.


An absorbing layer B similar to the one in the embodiment shown in Figure 1 may be formed on the transparent resin layer 32 in the same manner as explained with reference to Figure 1.

The embodiment of Figure 3 is similar to the one of Figure 2 except that an adhesive layer 33 is disposed between the base film 31 and the transparent resin layer 32 so as to enhance the adhesion between these layers. The adhesive layer 33 may comprise a resin which is compatible with resins constituting the base film 31 and the transparent resin layer 32, examples of such a resin may include: polyester resin, acrylate resin, methacrylate resin, styrene-acrylate copolymer, and styrene-methacrylate copolymer.

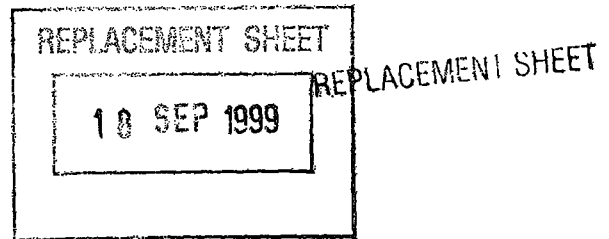

Figures 4 and 5 show other embodiments of the laminate film used according to the present invention which correspond to those shown in Figures 2 and 3, respectively, but separate absorbing layers B shown in Figures 2 and 3 are omitted by dispersing the above-mentioned inorganic fine powder in the transparent resin layers to form a transparent resin layer 32B having wax-absorptivity. In these cases, it is preferred that the transparent resin layer 32B is provided with pores having an average pore radius (D) of 10 - 200 Å.

The transparent resin layer 32 or 32B may be formed on the base film 31 by dissolving a resin therefor in a volatile solvent such as alcohols, e.g., methanol and ethanol, and ketones, e.g., methyl ethyl ketone and acetone, and further dispersing the inorganic fine powder therein for the transparent resin layer 32B, and then applying the resultant coating liquid by bar coating, dipping, spraying, and spin coating onto the base film 31, followed by drying. In order to enhance the adhesion between the base film 31 and the transparent resin layer 32 or 32B so as to prevent a toner image from being peeled off the base film 31 or the entire laminate film, the surface of the base film can be processed with plasma or corona discharge in addition to or alternatively with the formation of an adhesive layer 33 (Figure 3

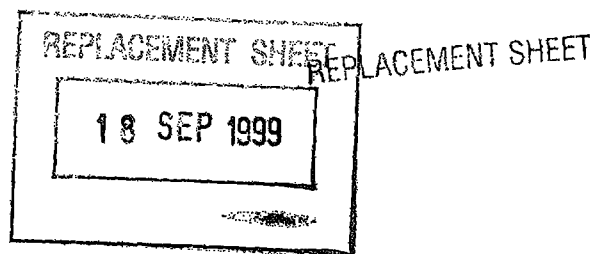

and Figure 5).

Now, a toner used for image formation in combination with the laminate film used according to the present invention will be explained.

A toner used in a color electrophotographic apparatus is required to show good melting and color mixing characteristic on heating, a low softening point, a low storage modulus at the fixation temperature and a sharp meltability.

In relation with the laminate film, it is preferred that the toner has a storage modulus which is clearly smaller than the resin constituting the transparent resin layer 32 or 32B. More specifically, the toner may preferably show a storage modulus of $1 \times 10^2 - 1 \times 10^5$ dyn/cm², more preferably $5 \times 10^2 - 5 \times 10^4$ dyn/cm², so as to provide good compatibility with the transparent resin layer 32 or 32B and color mixing characteristic between toners.


A color copy faithful to an original multi-color or full-color image can be formed and a color reproduction range is enlarged by using sharp melting toners.

It is particularly preferred to use a toner comprising a polyester resin as a binder resin in combination with the laminate film according to the present invention, in view of fixation and sharp melting characteristics. An example of the sharp

18 SEP 1999

melting polyester is a polymer having ester linkages in its polymer main chain synthesized from a diol compound and a dicarboxylic acid.


In view of sharp melting characteristics, it is particularly preferred to use a polyester resin, which has been obtained through condensation polymerization of at least a bisphenol derivative represented by the formula:

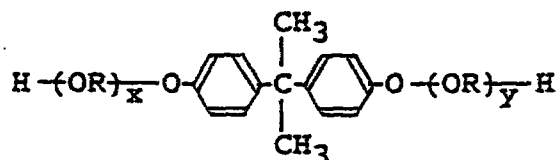

(wherein R denotes ethylene or propylene group, x and y are independently a positive integer of 1 or larger giving an average of x+y in the range of 2 - 10) or a substitution derivative thereof with a carboxylic acid component (such as fumaric acid, maleic acid, maleic anhydride, phthalic acid, terephthalic acid, trimellitic acid and pyromellitic acid) selected from two or more functional carboxylic acids, anhydrides and lower alkyl esters thereof.

Such a polyester resin may preferably have a softening point of 75 - 150 °C, more preferably 80 - 130 °C. The softening characteristic of a toner comprising a polyester resin as a binder resin is shown in Figure 6 as measured according to a method described below.


A toner softening characteristic is

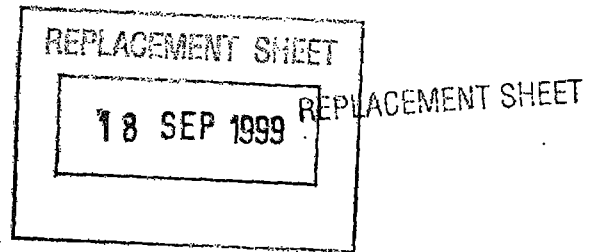

represented by a curve of plunger descending distance vs. temperature (softening S-character curve) as shown in Figure 6. A sample toner or resin in an amount of 1 - 3 g accurately weighed is placed on a die having a nozzle diameter of 0.2 mm and a thickness of 1.0 mm and preheated at an initially set temperature of 70 °C for 30 sec and then heated at a constant temperature-raising rate of 6 °C/min. under a plunger having a sectional area of 10 cm² and exerting an extrusion weight of 20 kg. As the temperature is raised at a constant rate, the toner is gradually heated to start flowing (A—B). On further heating, the toner is melted to flow at a large rate (B—C—D) and then the plunger descent is ceased to complete the extrusion (D—E).

The height H of the S-character curve corresponds to the total amount of the flown toner or resin sample, and a temperature at a point C at a height H/2 represents the softening point of the sample.


In relation with the laminate film, it is preferred that the toner or its binder resin shows a storage modulus (G') smaller than that of the resin constituting the transparent resin layer 32 or 32B respectively measured at 160 °C and a frequency of 100 rad/sec. It is preferred that the transparent resin layer 32 or 32B shows a higher modulus than the toner



or toner binder resin at a fixing temperature (e.g., 130 - 170 °C). In case where the resin constituting the transparent resin layer 32 or 32B has a storage modulus (G') close to that of the toner binder resin at the fixing temperature, if fixing is performed under such a condition that a portion having two or more colors of toners overlapping with each other and also a portion of a single color toner for producing a full color toner are both fixed to provide a sufficient transparency at a single fixing operation, the transparent resin layer 32 or 32B is also sufficiently heated to lower its viscoelasticity, so that the layer 32 or 32B is liable to be peeled off at the interface with the base film 31 and thus a part of the image can be peeled and taken by the hot fixing roller, thus causing a high temperature offset.

In case where the resin constituting the transparent resin layer 32 or 32B has a storage modulus (G') lower than that of the toner binder resin, a single color toner image can be fixed onto the layer 32 or 32B, but good color mixing is difficult when toner images of different colors are fixed in superposition since the melt viscosity of the transparent resin layer 32 or 32B becomes lower than that of the toner binder resin.

In case where the resin of the transparent resin layer 32 or 32B exceeds 1000 times that of the




REPLACEMENT SHEET

toner binder resin at a fixing temperature (e.g., 160 °C), a practically acceptable level of transparency is attained for a thin image of a single color but a multi-color or full-color image or a high-density image results in an unevenness due to thickness irregularity of multiple toner layers because the transparent resin layer 32 or 32B does not cause a sufficient degree of deformation as to absorb the thickness irregularity. Thus, the transparency is liable to be impaired. Further, because of a poor adhesiveness between the transparent resin layer 32 or 32B and the toner, a separation can occur within the toner layer to cause an offset.

The thickness of the transparent resin layer 32 or 32B can vary depending on the toner particle size but should be at least 0.5 times the average toner particle size so as to provide a sufficient transmittance to a low density portion having a thickness of only one toner particle. If the thickness exceeds three times the toner particle size, the amount of melting resin becomes large to result in obscure or strained images and also cracking of images due to flexure. The thickness is preferably 0.5 - 2 times the volume-average particle size of the toner.

More specifically, in case of using a toner having a volume-average particle size of 6 microns, it is preferred to use a transparent resin layer 32 or




REPLACEMENT SHEET

32B having a thickness of 3- 12 microns and, in case of using a toner having a volume-average particle size of 15 microns, it is preferred to use a transparent resin layer 32 or 32B having a thickness of 7.5 - 30 microns.

The average particle size of a toner is measured by means of a Coulter counter in the present invention, while it may be measured in various manners.

Coulter counter Model TA-II (available from Coulter Electronics Inc.) is used as an instrument for measurement, to which an interface (available from Nikkaki K.K.) for providing a number-basis distribution, and a volume-basis distribution and a personal computer CX-1 (available from Canon K.K.) are connected.


For measurement, a 1 %-NaCl aqueous solution as an electrolytic solution is prepared by using a reagent-grade sodium chloride. For example, ISOTON[®]-II (available from Coulter Scientific Japan K.K.) may be used therefor. Into 100 to 150 ml of the electrolytic solution, 0.1 to 5 ml of a surfactant, preferably an alkylbenzenesulfonic acid salt, is added as a dispersant, and 2 to 20 mg of a sample is added thereto. The resultant dispersion of the sample in the electrolytic liquid is subjected to a dispersion treatment for about 1 - 3 minutes by means of an

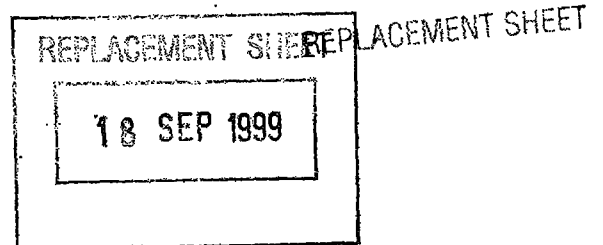

ultrasonic disperser, and then subjected to measurement of particle size distribution in the range of 2 - 40 microns by using the above-mentioned Coulter counter Model TA-II with a 100 micron-aperture to obtain a volume-basis distribution and a number-basis distribution. From the measured particle size distribution, the volume-average particle size of the toner may be obtained.

Now, the color image forming method according to the present invention will be described.

Figure 7 is a schematic sectional view of an electrophotographic apparatus 100 capable of producing a full-color image according to the method of the present invention. Referring to the figure, the apparatus is roughly divided into a recording medium-conveying system (I) including a transfer drum 8 and shown in a right-to-middle part of the apparatus, a latent image-forming section (II) disposed at the middle of the apparatus adjacent to the transfer drum 8, and a rotary developing apparatus (III) as a developing means disposed adjacent to the latent image-forming section (II). The recording medium-conveying system (I) includes recording medium-supplying trays 101 and 102 disposed releasably in an opening provided on the right side of the apparatus body 100; recording medium-feed rollers 103 and 104 disposed almost immediately above the trays 101 and



REPLACEMENT SHEET

102; recording medium-supply guides 4A and 4B disposed adjacent to the rollers 103 and 104 and equipped with supply rollers 106; the transfer drum 8 rotatably disposed adjacent to the recording medium supply roller 4B and having an abutting roller 7, a gripper 6, a recording medium-separation charger 12 and a separation claw 14 in this order from its upstream to downstream in the direction of its rotation indicated by an arrow along its outer periphery and also a transfer charger 9 and a recording medium-separation charger 13 inside thereof; a conveyer belt means 15 disposed adjacent to the separation claw 14; a discharge tray 17 disposed adjacent to the conveying end of the conveyer belt means 15 and extending outwardly from the apparatus body 100 so as to be releasable from the body 100; and a fixer 16 disposed adjacent to the tray 17.

The latent image-forming section (II) includes an electrostatic latent image-holding member (i.e., photoconductive drum) 2 disposed rotatably in the direction of an arrow so that its outer periphery contacts the outer surface of the transfer drum 8, and a charge-removing charger 10, a cleaning means 11, a primary charger 3, and an imagewise exposure means such as a laser beam scanner 19 including a polygonal mirror 19a for illuminating the outer surface of the photosensitive drum 2 to form an electrostatic latent

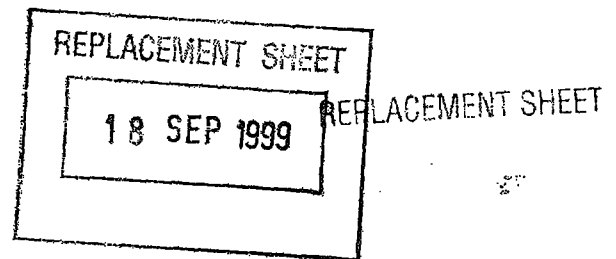


image thereon, disposed in this order from the upstream to the downstream in the direction of the rotation in the vicinity of the photosensitive drum 2.

The rotary developing apparatus (III) includes a rotatably disposed housing (hereinafter called "rotating member") 18, and a yellow developing unit 18Y, a magenta developing unit 18M, a cyan developing unit 18C and a black developing unit 18BK respectively disposed within the rotating member 18 so as to visualize an electrostatic latent image formed on the outer periphery of the photosensitive drum 2 when placed at a position facing the outer surface of the photosensitive member 2.


A sequence of the operation of the image forming apparatus having an arrangement as described above will now be explained with respect to a full-color mode. When the photosensitive drum 2 is rotated in the arrow direction in Figure 7, the photoconductor on the drum 2 is uniformly charged by the primary charger 3 and then subjected to imagewise exposure with laser light E modulated by a yellow image signal based on an original (not shown) to form an electrophotographic latent image on the photosensitive drum 2, which is then developed by the yellow developing unit 18Y which has been placed at the developing position facing the photosensitive drum 2 by the rotation of the rotation member 18.

REPLACEMENT SHEET

18 SEP 1999

On the other hand, a recording medium conveyed through the supply guide 4A, supply roller 106 and supply roller 4B is held by the gripper 6 at a prescribed time and wound about the transfer drum 8 electrostatically by the abutting roller 7 and an electrode disposed opposite to the roller 7. The transfer drum 8 is rotated in the arrow direction synchronously with the photosensitive drum 2, and the developed image on the photosensitive drum 2 given by the yellow developing unit 18Y is transferred onto the recording medium at a place where the photosensitive drum 2 and the transfer drum 8 abut each other. The transfer drum 8 is further rotated so as to be ready for transfer of a subsequent color ("magenta" in the case shown in Figure 7).

The photosensitive drum is then charge-removed by the charge-removing charger 10, cleaned by the cleaning means 11, again charged by the primary charger 3 and then subjected to imagewise exposure based on a magenta image signal in the same manner as in the yellow exposure described above. During such electrostatic latent image formation on the photosensitive drum 2 based on the magenta image signal, the rotating member 18 is rotated so that the magenta developing unit 18M is disposed at the above-mentioned prescribed developing position. Then, a prescribed magenta developing operation is performed

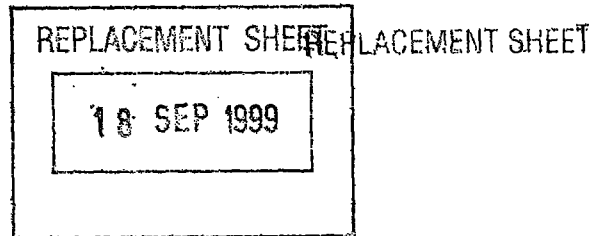


and the developed magenta image is transferred onto the recording medium already carrying the yellow image on the transfer drum 8 in the same manner as in the yellow development.

The above operation is repeated also with respect to a cyan color and a black color. After transfer of the four color images, a multi-color image is formed on the recording medium on the transfer drum 8, charge-removed with the respective chargers 12 and 13. Then, the recording medium carrying the multi-color image is released from the gripper 6, separated from the transfer drum 8 by the separation claw 14 and conveyed by the conveyer belt 15 to the fixer 16, where the multi-color image is fixed onto the recording medium under heat and pressure. In this way, one full-color print sequence is completed to provide a prescribed full-color print image.

The fixer 16 includes a hot fixing roller 161 and a pressing roller 162. The hot roller 161 may preferably be covered with a surface layer of, e.g., silicone rubber or fluorine-containing resin, having an excellent releasability. The pressing roller 162 may preferably be surfaced with a fluorine-containing resin.

According to the present invention, in an image forming sequence as described above, a laminate film having a wax-absorbing layer is used as the

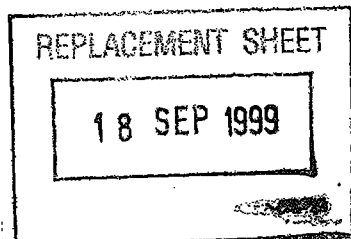

REPLACEMENT SHEET


recording medium. As a result, even when a toner containing a wax component is used to form a fixed toner image thereon, the exudation of the wax causing wax flowout is prevented on the fixed toner image. Further, as the fixation is satisfactorily performed without oil application. The deterioration of the fixed image or the laminate film is avoided. Accordingly, fixed images of a good quality can be formed on the laminate film suitably for an OHP use. More specifically, the fixed image formed on the laminate film provides a color or full-color projected image which is free from graying as a whole and shows a good color reproducibility.

Hereinbelow, the present invention is described more specifically based on Examples, wherein "part(s)" means "part(s) by weight".

Example 1

451 wt. parts of 0.1M- Na_3PO_4 aqueous solution was added to 7-9 wt. parts of deionized water, followed by warming at 60 °C and stirring by a TK homomixer (mfd. by Tokushu Kika Kogyo K.K.) at 12,000 rpm. Then, 67.7 wt. parts of 1.0 M- CaCl_2 aqueous solution was gradually added thereto to form a dispersion medium containing $\text{Ca}_3(\text{PO}_4)_2$.

Styrene	170 wt.parts
2-Ethylhexyl acrylate	30 "
Paraffin wax (Tmp = 75 °C)	60 "




REPLACEMENT SHEET

C.I. Pigment Blue 15	10 wt. parts
Styrene-methacrylic acid-	
methyl methacrylate copolymer	5 "
Di-tert-butylsalicylic acid	
metal compound	3 "

Of the above-listed ingredients, only C.I. Pigment Blue 15, di-tert-butyl salicylic acid metal compound and styrene were subjected to preliminary mixing by a mixer ("Ebara Milder", mfd. by Ebara Seisakusho K.K.). Then, the remaining ingredients were added, and the entire mixture was warmed at 60 °C and dissolved and dispersed with each other to form a monomer mixture. Then, while the mixture was held at 60 °C, 10 parts of dimethyl 2,2'-azobisisobutyrate (initiator) was added thereto to form a monomer composition.

Into the above-prepared dispersion medium under stirring in a 2 liter-flask, the above monomer composition was added and dispersed into particles under stirring by the TK homomixer at 10000 rpm for 20 min. at 60 °C in a nitrogen atmosphere. Then, the content was stirred by a paddle stirrer for 3 hours of reaction at 60 °C and 10 hours of polymerization at 80 °C.

After the polymerization, the product was cooled, acidified with hydrochloric acid to dissolve $\text{Ca}_3(\text{PO}_4)_2$, recovered by filtration, washed with water




and dried to obtain a polymerization toner.

The thus-obtained toner was found to have a weight-average particle size of 8.2 microns and a sharp particle size distribution as measured by a Coulter counter. A particle section was observed by a transmission electron microscope by stained ultramicrotomy, whereby a capsule structure having a surface layer consisting mainly of the styrene-acrylic resin and a core consisting mainly of the wax was observed.

0.7 wt. part of hydrophobic silica having a BET specific surface area of $200 \text{ m}^2/\text{g}$ was externally added to 100 wt. parts of the toner. Further, 7 wt. parts of the toner was mixed with 93 wt. parts of a Cu-Zn-Fe type ferrite carrier surface-coated with styrene-methyl methacrylate copolymer to obtain a developer.

The developer was charged in a re-modeled commercially available full-color copying machine ("CLC-500", mfd. by Canon K.K.) and used to form an image on a laminate film as a recording medium prepared in the following manner under developing conditions including environmental temperature of 23°C and humidity of 65 %RH and a developing contrast of 320 volts.

The laminate film used was a laminate film A prepared by coating an about 100 micron-thick PET film



with an absorbing layer formed by CVD (chemical vapor deposition) in a known manner of inorganic fine powder comprising aluminum as a principal element. The laminate film A showed an average pore radius of 32 Å and a BET specific surface area of 7 m²/g.


A yet-unfixed toner image on the laminate film formed by development and transfer in the re-modeled copying machine ("CLC-500") was fixed by passing through an external fixing machine (having the same roller arrangement as the one in the "CLC-500" copying machine but having no oil applicator) at a fixing speed of 20 mm/sec.

As a result, a fixed toner image was formed without causing offset, in the form of a beautiful and clear transparent image free from exudation or flowout trace of the wax component. The fixed toner image was used for projection by an OHP apparatus to provide a very beautiful cyan-colored projected image.

Example 2

A laminate film B was prepared in the same manner as in Example 1 except that a wax-absorbing layer was formed by replacing the inorganic fine powder with silica-type inorganic fine powder. The wax-absorbing layer of the laminate film B showed an average pore radius of 55 Å and a BET specific surface area of 11 m²/g.

As a result of image formation on the

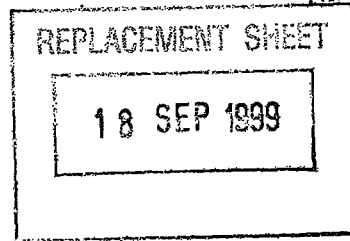


laminate film B otherwise in the same manner as in Example 1, a good fixed image was formed without any exudation trace of the wax component. As a result of projection of the image by an OHP apparatus, a beautiful projection image was obtained without impairing the transparency.

Example 3

The toner production process in Example 1 was repeated except that the C.I. Pigment Blue 15 was replaced with 9 parts of C.I. Pigment Red 122 to prepare a magenta toner, with 8 parts of C.I. Pigment Yellow to prepare a yellow toner, and with 12 parts of commercially available carbon black to prepare a black toner.

Three developers were prepared by using these three colors of toners in the same manner as in Example 1, and totally 4 colors of developers including the blue developer used in Example 1 were used to form a yet un-fixed full-color toner image on a laminate film A as used in Example 1 by development and transfer in the re-modeled copying machine ("CLC-500"). The full-color toner image was fixed by an external fixing machine equipped with a pressure roller of a silicone rubber and without oil application.

The resultant fixed toner image was free of offset or exudation trace of the wax component, thus

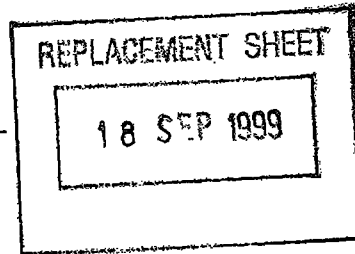

being excellent in quality.


The transparent film carrying the toner image was used for projection by an OHP apparatus to provide a beautiful full-color projection image. Further, the transparent film was obtained through fixation without oil application, so that it was free from stickiness and excellent in storage stability.

Example 4

A laminate film C was prepared by coating an about 100 micron-thick PET film with a coating liquid prepared by mixing 90 parts of alumina hydrate and 10 parts of polyvinyl alcohol with 1000 parts of water by bar coating, followed by drying at 150 °C for 10 min. in a drying oven to form an 8 micron-thick wax absorbing layer. The wax absorbing layer of the laminate film C showed an average pore radius of 50 Å and a BET specific surface area of 10 m²/g. Image formation and fixation was performed by using the laminate film C otherwise in the same manner as in Example 1, whereby a good fixed toner image was obtained free from exudation trace of wax component. As a result of projection by an OHP apparatus, a beautiful projection image was obtained without impairing transparency.

Comparative Example 1

Development, transfer and fixation of a toner image were performed by using a commercially available



OHP film (a corona discharged polyethylene terephthalate film) in place of the laminate film A otherwise in the same manner as in Example 1. As a result, no offset was caused due to the effect of the wax contained in the toner, but a wax exudation trace was observed at a rear end of the image and the image was accompanied with a low transparency as a whole.

Example 5


A laminate film D was prepared in the same manner as the laminate film A except that the amount of the inorganic fine powder was reduced to have a specific surface area of $0.08 \text{ m}^2/\text{g}$.

Development, transfer and fixation of a toner image were performed by using the laminate film D otherwise in the same manner as in Example 1, no offset was caused but there was observed a slight trace of wax exudation which was however within a practically acceptable extent.

Example 6

Styrene-butyl acrylate copolymer	100 parts
Low-molecular weight polyolefin wax	7 parts
Phthalocyanine pigment	4.5 parts
Di-tert-butylsalicylic acid	
metal compound	3 parts

The above ingredients were blended, melt-kneaded by a twin-screw kneading extruder, cooled and then pulverized by a jet stream pulverizer, followed

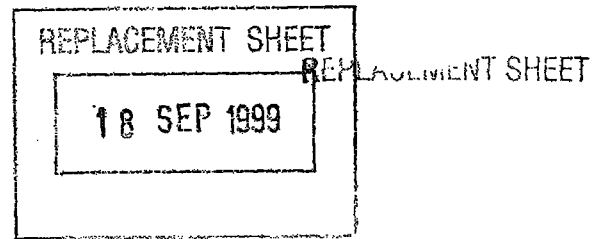


by classification by a pneumatic classifier to obtain a blue powdery toner having a weight-average particle size of 8.5 microns. Then, 100 parts of the toner was blended with 0.8 wt. part of negatively chargeable colloidal silica externally added thereto to obtain a cyan toner, which was then blended with ferrite particles coated with a fluorine-containing acrylic resin in a ratio of 1:9 to obtain a blue developer.

A yet-unfixed toner image was formed on the laminate film A used in Example 1 by using the above-prepared blue developer and the remodeled copying machine ("CLC-500"), and then fixed by an external fixing machine comprising an upper roller coated with a fluorine-containing resin and a lower silicone rubber roller but having no oil applicator, whereby a fixed image with a good transparency and no wax exudation trace was obtained without causing offset.

Example 7

A laminate film E was prepared by coating an about 100 micron-thick PET film with a film of silica formed by CVD and found to have an average pore radius of 26 Å and a BET specific surface area of 12 m²/g. Image formation and fixation were performed by using the laminate film E otherwise in the same manner as in Example 6, whereby a fixed toner image with a good transparency and with no wax exudation trace was obtained without causing offset.

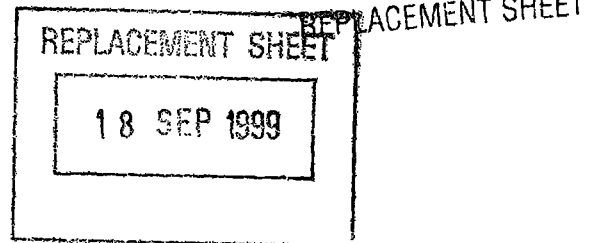

Example 8

Polyester	100 parts
Paraffin wax	9 parts
Phthalocyanine pigment	4.5 parts
Di-tert-butylsalicylic acid compound	3 parts

The above ingredients were subjected to melt-kneading, pulverization, classification, external addition of silica and blending with carrier in the same manner as in Example 6 to prepare a blue developer.


A yet-unfixed toner image was formed and fixed on the laminate film A by using the blue developer otherwise in the same manner as in Example 6, whereby a fixed toner image with excellent transparency was obtained without no wax exudation trace.

Example 9

Image formation and fixation were performed in the same manner as in Example 6 except for using the laminate film C used in Example 4 instead of the laminate film A, whereby a fixed image with a good transparency and no wax exudation trace was formed without causing offset.

Comparative Example 2

A blue developer was prepared in the same manner as in Example 6 except for omission of the wax component, and used for image formation and fixation

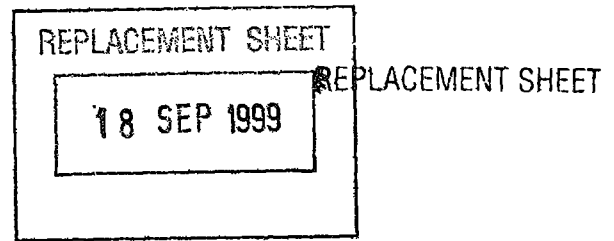

in the same manner as in Example 6, whereby offset was caused, thus failing to provide a good fixed toner image.

Example 10


A laminate film F having a BET specific surface area of $0.09 \text{ m}^2/\text{g}$ was prepared similarly as the laminate film A used in Example 6 by changing the conditions for forming the absorbing layer.

Image formation and fixation were performed on the laminate film thus formed otherwise in the same manner as in Example 6, whereby the resultant fixed toner image showed a somewhat lower transparency which was however at a practically acceptable level.

Example 11

A biaxially stretched 100 micron-thick polyethylene terephthalate (PET) film having a heat distortion temperature of 152°C and a maximum service temperature of 150°C was coated with a 16 micron-thick transparent resin layer formed by applying a solution in acetone of a polyester resin (solubility parameter: about 11) having a storage modulus (G') of $8 \times 10^4 \text{ dyn/cm}^2$ at a temperature of 160°C and a frequency (ω) of 100 rad/sec and a softening point of 116°C by bar coating, followed by drying, and then with a wax-absorbing layer formed in the same manner as in Example 1, to form a laminate film G.


Separately, a yellow toner powder was



prepared by using 100 parts of a polyester resin P₂ (solubility parameter: about 11) having a storage modulus (G') of 4×10^3 dyn/cm² at a temperature of 160 °C and a frequency (W) of 100 rad/sec and a softening point of 105 °C, 9 parts of paraffin wax, 3.5 parts of yellow colorant and 4 parts of a chromium-containing organocomplex. The yellow toner powder showed a volume-average particle size of 12 microns, a storage modulus (G') of 8×10^3 dyn/cm² and a softening point of 107 °C.

Then, 0.4 part of hydrophobic colloidal silica was externally added to 100 parts of the yellow toner powder to form a yellow toner, which was then mixed with ferrite particles in a weight ratio of 5:100 to obtain a yellow developer.

A uniform yet unfixed yellow toner image was formed on the above-prepared laminate film G by using the above yellow developer and image formation and transfer and then fixed in an image forming apparatus as shown in Figure 7 equipped with a hot pressure fixer including a hot fixing roller 161 surfaced with silicone rubber and a pressure roller 162 surfaced with a fluorine-containing resin under the fixing conditions of a hot fixing roller temperature of 160 °C, an average heating time of 25 msec and a pressing force of 3 kg/cm² to form a fixed yellow toner image having an image density (McBeth refractive

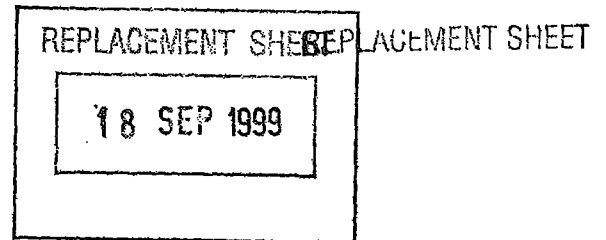

densitometer) of 1.5.

The thus obtained fixed toner image showed no offset and was clear and free from wax exudation trace. When the toner image was projected by an OHP, a very clear yellow transmitted light was obtained to provide a beautiful yellow projected image.


Example 12

A magenta toner powder having a volume-average particle size of 12 microns was prepared in the same manner as in Example 11 except for using 1.9 parts of a magenta colorant. The magenta toner powder showed a storage modulus of 6×10^3 dyn/cm².

A red developer was prepared by using the magenta toner powder otherwise in the same manner as in Example 11 and then used for image formation and fixation on the laminate film G in the same manner as in Example 11. The resultant fixed image caused no offset and was clear and free from wax exudation trace. When used for projection by an OHP apparatus, the fixed toner image provided very clear red transmitted light and also be beautiful red projected image.

Example 13

A cyan toner powder having a volume-average particle size of 12 microns was prepared in the same manner as in Example 11 except for using 5.0 parts of a cyan colorant. The magenta toner powder showed a

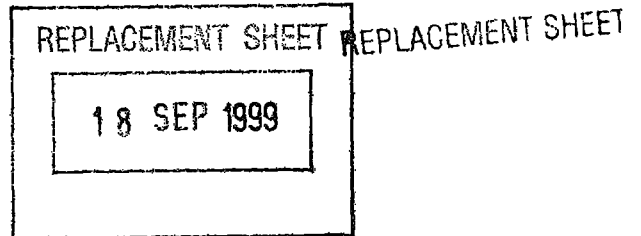


storage modulus of 1×10^4 dyn/cm² and a softening point of 108 °C.

A blue developer was prepared by using the magenta toner magenta otherwise in the same manner as in Example 11 and then used for image formation and fixation on the laminate film G in the same manner as in Example 11. The resultant fixed image caused no offset and was clear and free from wax exudation trace. When used for projection by an OHP apparatus, the fixed toner image provided very clear blue transmitted light and also be beautiful blue projected image.

Example 14

A laminate film H was prepared in the same manner as in the laminate film G used in Example 11 except that the absorbing layer was replaced by an 8 micron-thick absorbing layer comprising alumina and polyvinyl alcohol prepared in the same manner as in Example 4.

Image formation and fixation were performed on the laminate film H otherwise in the same manner as in Example 11, whereby a clear fixed toner image free from wax exudation trace was obtained without offset. When projected by an OHP, the toner image provided a very beautiful yellow transmitted light and also a beautiful yellow projection image.

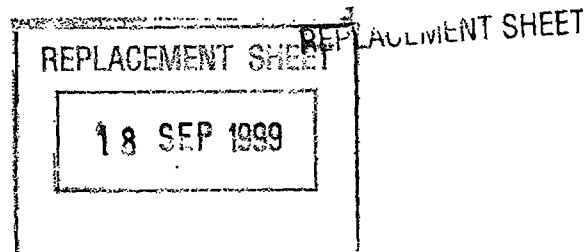

Example 15


A PET film as used in Example 11 was coated with a methyl ethyl ketone solution of an epoxy resin having a solubility parameter of 10.5, a weight-average molecular weight (M_w) of 20,000, a storage modulus (G') of 5×10^4 dyn/cm² and a softening point of 114 °C, followed by drying to form a 15 micron-thick transparent resin layer, and then coated with an absorbing layer formed in the same manner as in Example 1.

Image formation and fixation were performed on the laminate film I so as to provide a fixed toner image having an image density of 0.5 otherwise in the same manner as in Example 11. The resultant fixed toner image was clear, offset-free and also free from wax exudation trace. When projected by an OHP apparatus, the toner image provided a very clear yellow transmitted light and also a beautiful yellow projected image.

Example 16

A fixed magenta toner image was formed on the laminate film I in the same manner as in Example 15 except for using the magenta toner prepared in Example 12 so as to provide a fixed image density of 0.5.

The resultant fixed toner image was clear, offset-free and also free from wax exudation trace. When projected by an OHP apparatus, the toner image



REPLACEMENT SHEET

provided a very clear red transmitted light and also a beautiful red projection image.

Example 17

A fixed cyan toner image was formed on the laminate film I in the same manner as in Example 15 except for using the cyan toner prepared in Example 13 so as to provide a fixed image density of 0.5.


The resultant fixed toner image was clear, offset-free and also free from wax exudation trace. When projected by an OHP apparatus, the toner image provided a very clear blue transmitted light and also a beautiful blue projection image.

Examples 18 - 20

Yellow fixed toner image, magenta fixed toner image and cyan fixed toner image was each formed on a laminate film G having a transparent resin layer of a polyester resin as used in Example 11 otherwise in the same manner as in Examples 15 - 17, respectively. The thus obtained fixed toner images provided further better transmittances than in Examples 15 - 17 because of the transparent layer comprising a polyester resin of the same kind as the toner binder resin.

Example 21

A yellow fixed toner image having an image density of 0.5 was formed on the laminate film H used in Example 14 having a transparent layer of a polyester resin and a wax-absorbing layer comprising

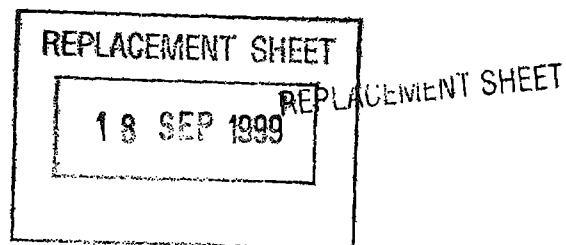

alumina particles and polyvinyl alcohol otherwise in the same manner as in Example 15. The toner image provided a further better transmittance than in Example 15 because the laminate film H had a transparent resin layer comprising a polyester resin of the same kind as the toner binder resin.

Example 22

A sharp-melting polyester resin prepared by condensation polymerization of propoxide bisphenol and fumaric acid and showing properties shown in the following Table 1 was used as a toner binder resin.

Table 1

Storage modulus (G') at 160 °C and 100 rad/sec	Softening point	Solubility parameter
7 x 10	106 °C	about 11

100 parts of the above polyester resin and materials shown in Table 2 below were used to prepare toner powder of respective colors.


Table 2

Toner	Colorant	Qty. (parts)	Charge controller	Qty. (parts)
Yellow	C.I. Pigment Yellow 17	3.5	Organochromium complex	4.0
Magenta	C.I. Solvent Red 52	1.0	ditto	4.0
	C.I. Solvent Red 49	0.9		
Cyan	Phthalocyanine pigment	5.0	ditto	4.4
Black	C.I. Pigment Yellow 17	1.2	ditto	4.4
	C.I. Pigment Red 5	2.8		
	C.I. Pigment Blue 15	1.5		

REPLACEMENT SHEET

18 SEP 1999

REPLACEMENT SHEET




Toner powder of the respective colors showed properties given in Table 3 below.

Table 3

Toner	Storage modulus (G') at 160°C, 100 rad/sec	Softening point
Yellow	1×10^4 dyn/cm ²	109 °C
Magenta	8×10^3	108
Cyan	1×10^4	109
Black	1×10^4	109

100 parts each of the toner powders of respective colors were respectively mixed externally with 0.5 part of hydrophobic colloidal silica to form respectively color toners, which were then respectively mixed with a resin-coated ferrite carrier in a weight ratio of 5:100 to provide respective colors of developers. The four colors of developers were charged in an image forming apparatus as shown in Figure 7, and were used for image formation repeatedly on the laminate film G and respectively in the same manner as in Example 11, followed by fixing in the same manner as in Example 11, to form a full-color fixed toner image thereon. The laminate film carrying the full-color fixed toner image was used for

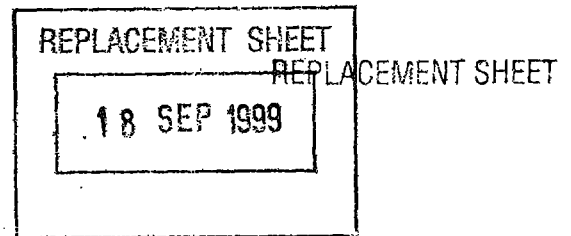

projection by an OHP apparatus, whereby a brilliant full-color projection image was formed on a screen and no wax exudation trace was observed.


Example 23

Image formation and fixation were performed to form a full-color fixed toner image on the laminate film H used in Example 14 instead of the laminate film G otherwise in the same manner as in Example 22. When used for projection by an OHP apparatus, the full-color fixed toner image provided a brilliant full color image was projected on a screen and no wax exudation trace was observed.


Example 24

A laminate film J was prepared by replacing the transparent resin layer of a polyester resin of the laminate film G with a 16 micron-thick layer of the polyester resin used as the binder resin in Example 16. A full-color toner image was formed on the laminate film J by using the yellow toner, magenta toner, cyan toner and black toner in the same manner as in Example 16, and the toner image was fixed to cause color mixing under the conditions of a hot fixing roller temperature of 160 °C, an average heating time of 25 msec and a pressing force of 3 kg/cm², whereby a full-color fixed image free from wax exudation trace was formed without offset.

- 63 -



A laminate film suitable for providing a transparency for an OHP (overhead projector) is formed by disposing an absorbing layer on a substrate. The absorbing layer functions to allow addition of a wax component to a toner so as to improve the color mixing characteristic and anti-offset characteristic of the toner without causing a wax exudation trace which is liable to occur in a fixed toner image if the absorbing layer is not provided.

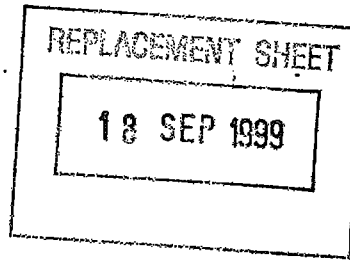

claims

1. Use of a laminate film comprising: an absorbing layer for absorbing a wax component and a substrate for supporting the absorbing layer in an electrophotographic color image forming process including a step of fixing a color toner image formed of a color toner containing the wax component onto the laminate film under heat and pressure.

2. The use according to Claim 1, wherein the wax component is one contained in a polymerization color toner obtained through suspension polymerization.


3. The use according to Claim 1, wherein wax component is one contained in a color toner prepared through melt-kneading, pulverization and classification of toner ingredients including the wax component.

4. The use according to Claim 1, wherein the wax component has a melting point of 30 - 150 °C.

5. The use according to Claim 1, wherein the wax component has a melting enthalpy of 50 - 250 Joule/g.

6. The use according to Claim 1, wherein the wax component comprises at least one





member selected from paraffin wax, modified paraffin wax, polyolefin wax, modified polyolefin wax, higher fatty acid, metal salt of higher fatty acid and amide wax.

7. The use according to Claim 1, wherein the absorbing layer is disposed on the substrate.

8. The use according to Claim 7, wherein the absorbing layer comprises inorganic fine powder.


9. The use according to Claim 8, wherein the absorbing layer comprises inorganic fine powder bonded to the substrate by partial dissolution of the substrate or the inorganic fine powder.

10. The use according to Claim 8, wherein the absorbing layer comprises inorganic fine powder held by a binder layer on the substrate.

11. The use according to Claim 8, wherein the absorbing layer comprises a film formed by dry coating of the inorganic fine powder.

12. The use according to Claim 8,



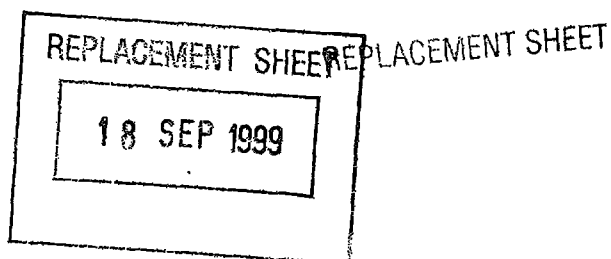

wherein the inorganic fine powder comprises activated alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.

13. The use according to Claim 8, wherein the absorbing layer shows an average pore radius of 10 - 200 Å.

14. The use according to Claim 8 or 13, wherein the laminate film shows a BET specific surface area of 0.1 - 30 m²/g.


15. The use according to Claim 10, wherein the binder layer comprises polyvinyl alcohol and the inorganic fine powder comprises alumina hydrate.

16. The use according to Claim 8, wherein the inorganic fine powder has an average primary particle size of 0.001 - 0.1 micron.

17. The use according to Claim 10, wherein the binder layer comprises a resin in a weight ratio of 1/1 to 1/50 with respect to the inorganic fine powder.

18. The use according to Claim 7, wherein the absorbing layer is disposed on a surface



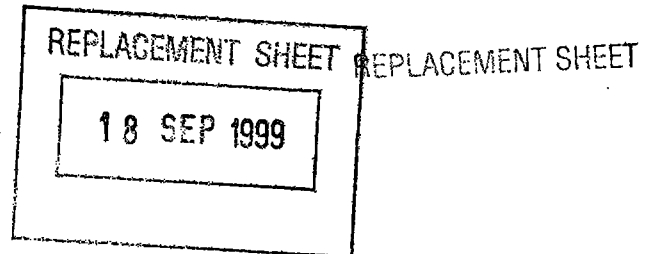

treated by plasma or corona discharge of the substrate.

19. The use according to Claim 1, wherein the absorbing layer is disposed on the substrate with an intermediate adhesive layer.


20. The use according to Claim 19, wherein the adhesive layer comprises polyester resin, acrylic resin, methacrylate resin, styrene-acrylate copolymer or styrene-methacrylate copolymer.

21. The use according to Claim 1, wherein the absorbing layer is disposed on the substrate with an intermediate transparent resin layer.

22. The use according to Claim 21, wherein the transparent resin layer comprises a resin having a solubility parameter of 9.5 - 12.5 and a storage modulus (G') of 1×10^3 - 1×10^6 dyn/cm² as measured at a temperature of 160 °C and a frequency (ω) of 100 rad/sec.

23. The use according to Claim 21, wherein the transparent resin layer comprises a resin having a storage modulus (G') larger than that of the





toner, respectively as measured at a temperature of 160 °C and a frequency (ω) of 100 rad/sec.

24. The use according to Claim 21, wherein the absorbing layer comprises inorganic fine powder.


25. The use according to Claim 24, wherein the absorbing layer comprises inorganic fine powder bonded the transparent resin layer by partial dissolution of the transparent resin layer or the inorganic fine powder.

26. The use according to Claim 24, wherein the absorbing layer comprises inorganic fine powder held by a binder layer on the transparent resin layer.

27. The use according to Claim 24, wherein the absorbing layer comprises a film formed by dry coating of the inorganic fine powder on the transparent resin layer.

28. The use according to Claim 24, wherein the inorganic fine powder comprises activated alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.



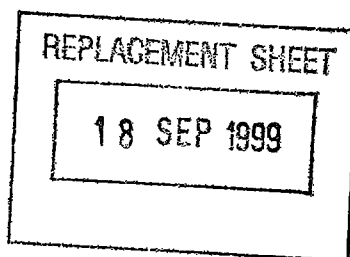

29. The use according to Claim 24, wherein the absorbing layer shows an average pore radius of 10 - 200 Å.

30. The use according to Claim 24, which shows a BET specific surface area of 0.1 - 30 m²/g.

31. The use according to Claim 26, wherein the binder layer comprises polyvinyl alcohol and the inorganic fine powder comprises alumina hydrate.

32. The use according to Claim 24, wherein the inorganic fine powder has an average primary particle size of 0.001 - 0.1 micron.

33. The use according to Claim 26, wherein the binder layer comprises a resin in a weight ratio of 1/1 to 1/50 with respect to the inorganic fine powder.

34. The use according to Claim 21, wherein the absorbing layer is disposed on a surface treated by plasma or corona discharge of the transparent resin layer.



REPLACEMENT SHEET

18 SEP 1999

REPLACEMENT SHEET

- 70 -

35. The use according to Claim 21, wherein the absorbing layer is disposed on the transparent resin layer with an intermediate adhesive layer.

36. The use according to Claim 35, wherein the adhesive layer comprises polyester resin, acrylic resin, methacrylate resin, styrene-acrylate copolymer or styrene-methacrylate copolymer.

37. The use according to Claim 21, wherein the transparent resin layer is disposed on a surface treated by plasma or corona discharge of the substrate.


38. The use according to Claim 21, wherein the transparent resin layer is disposed on the substrate with an intermediate adhesive layer.

39. The use according to Claim 38, wherein the adhesive layer comprises polyester resin, acrylic resin, methacrylate resin, styrene-acrylate copolymer or styrene-methacrylate copolymer.

40. The use according to Claim 1, wherein the absorbing layer is constituted as a transparent resin layer comprising a transparent resin



* C L H S *

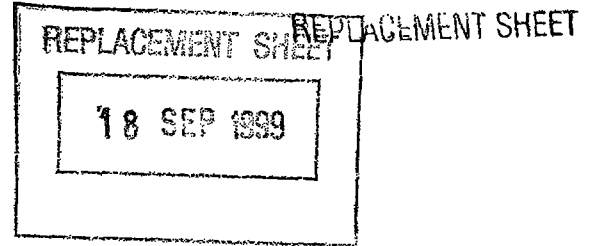

and inorganic fine powder.

41. The use according to Claim 40, wherein the inorganic fine powder has an average primary particle size of 0.001 - 0.1 micron.


42. The use according to Claim 40, wherein the transparent resin has a solubility parameter of 9.5 - 12.5 and a storage modulus (G') of 1×10^3 - 1×10^6 dyn/cm² as measured at a temperature of 160 °C and a frequency (ω) of 100 rad/sec.

43. The use according to Claim 40, wherein the transparent resin has a storage modulus (G') larger than that of the toner, respectively as measured at a temperature of 160 °C and a frequency (ω) of 100 rad/sec.

44. The use according to Claim 40, wherein the inorganic fine powder comprises activated alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.


45. The use according to Claim 40, wherein the absorbing layer shows an average pore radius of 10 - 200 Å.



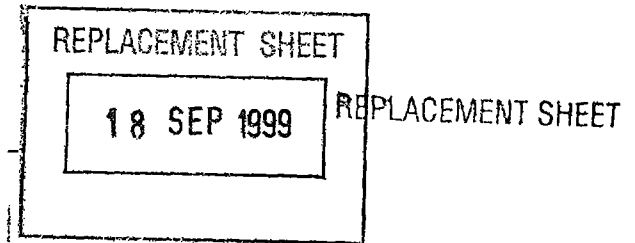

46. The use according to Claim 40,
which shows a BET specific surface area of 0.1 - 30
 m^2/g .
47. The use according to Claim 40,
which has heat-resistant layer on the absorbing layer.
48. The use according to Claim 47,
wherein the heat-resistant layer comprises polyvinyl
alcohol.
49. The use according to Claim 40,
wherein the absorbing layer is disposed on a surface
treated by plasma or corona discharge of the
substrate.
50. The use according to Claim 40,
wherein the absorbing layer is disposed on the
substrate with an intermediate adhesive layer.
51. The use according to Claim 50,
wherein the adhesive layer comprises polyester resin,
acrylic resin, methacrylate resin, styrene-acrylate
copolymer or styrene-methacrylate copolymer.



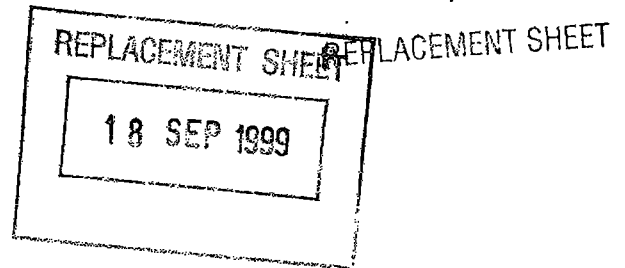

52. The use according to Claim 1, wherein the toner image is a full-color toner image.

53. A method for forming a fixed color toner image on a laminate film, comprising:

a developing step for developing an electrostatic latent image on an electrostatic image-bearing member with a color toner containing a wax component to form a color toner image on the electrostatic image-bearing member;


a transfer step for transferring the color toner onto the laminate film, the laminate film comprising an absorbing layer for absorbing the wax component and a substrate for supporting the absorbing layer; and

a fixing step for fixing the color toner image onto the laminate film under heat and pressure while absorbing the wax component in the color toner with the absorbing layer of the laminate film.

54. The method according to Claim 53, wherein the color toner comprises a polymerization toner containing the wax component obtained through suspension polymerization.

55. The method according to Claim 53, wherein the color toner is one prepared through melt-kneading,



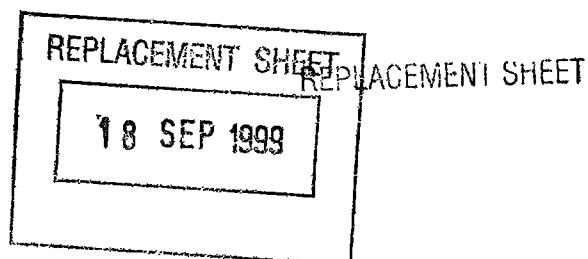

pulverization and classification of toner ingredients including the wax component.

56. The method according to Claim 53, wherein the wax component has a melting point of 30 - 150 °C.

57. The method according to Claim 53, wherein the wax component has a melting enthalpy of 50 - 250 Joule/g.


58. The method according to Claim 53, wherein the wax component comprises at least one member selected from paraffin wax, modified paraffin wax, polyolefin wax, modified polyolefin wax, higher fatty acid, metal salt of higher fatty acid and amide wax.

59. The method according to Claim 53, wherein the laminate film comprises an absorbing layer disposed on the substrate.

60. The method according to Claim 53, wherein the laminate film comprises the absorbing layer disposed on the substrate with an intermediate transparent resin layer comprising a transparent resin.

61. The method according to Claim 53, wherein the absorbing layer is constituted as a transparent resin



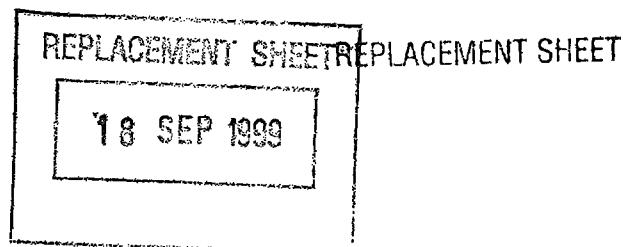

layer comprising a transparent resin and inorganic fine powder dispersed therein.

62. The method according to Claim 61, wherein the color toner contains a binder resin in addition to the wax component, and the transparent resin has a storage modulus (G') larger than that of the binder resin, respectively as measured at a temperature of 160°C and a frequency (ω) of 100 rad/sec.

63. The method according to Claim 53, wherein the absorbing layer comprises inorganic fine powder.


64. The method according to Claim 63, wherein the inorganic fine powder comprises activated alumina, aluminum hydroxide, alumina hydrate, silica or titanium oxide.

65. The method according to Claim 63, wherein the absorbing layer shows an average pore radius of 10 - 200 Å.

66. The method according to Claim 63 or 65, wherein the laminate film shows a BET specific surface area of $0.1 - 30 \text{ m}^2/\text{g}$.

67. The method according to Claim 63, wherein the inorganic fine powder has an average primary particle



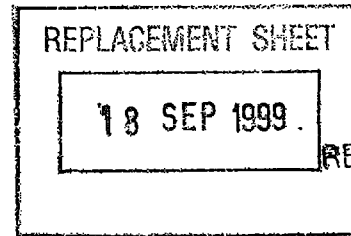


REPLACEMENT SHEET

size of 0.001 - 0.1 micron.

68. The method according to claim 53, wherein the color toner image is a full-color toner image.



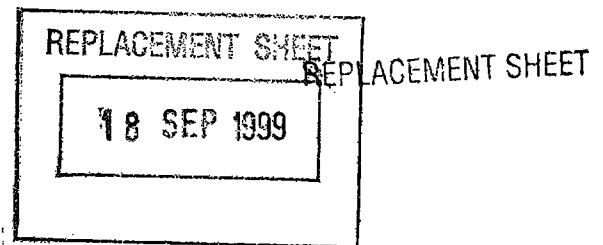

USE OF A LAMINATE FILM FOR RECEIVING A COLOR TONER IMAGE
AND METHOD FOR FORMING A FIXED COLOR TONER IMAGE

ABSTRACT OF THE DISCLOSURE

A laminate film suitable for providing a transparency for an OMP (overhead projector) is formed by disposing an absorbing layer on a substrate. The absorbing layer functions to allow addition of a wax component to a toner so as to improve the color mixing characteristic and anti-offset characteristic of the toner without causing a wax exudation trace which is liable to occur in a fixed toner image if the absorbing layer is not provided.

FIGURE 1

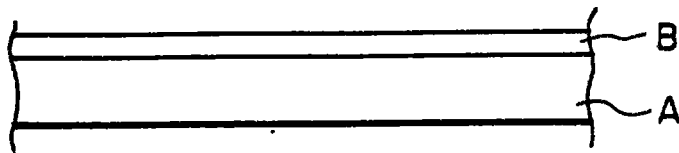
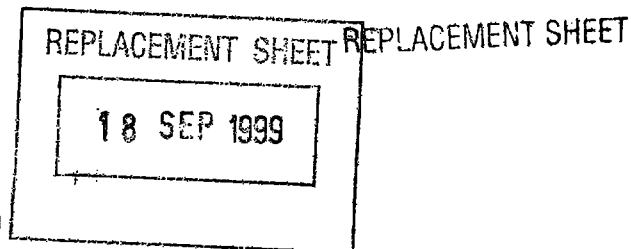


FIG. 1

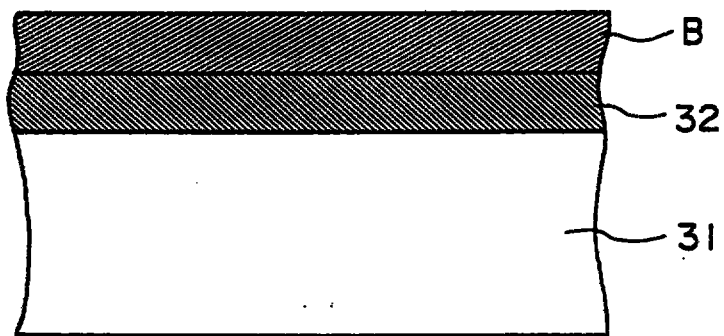


FIG. 2

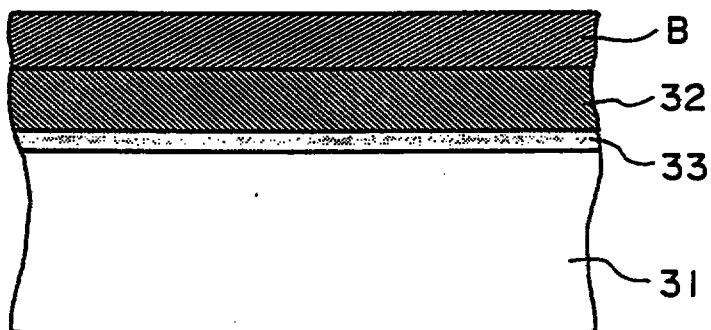


FIG. 3

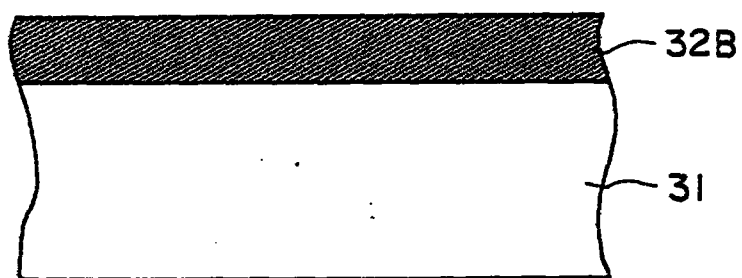
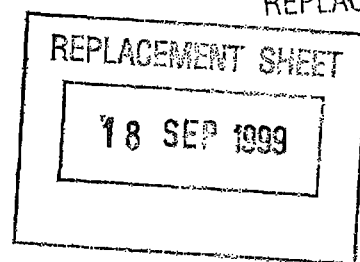


FIG. 4

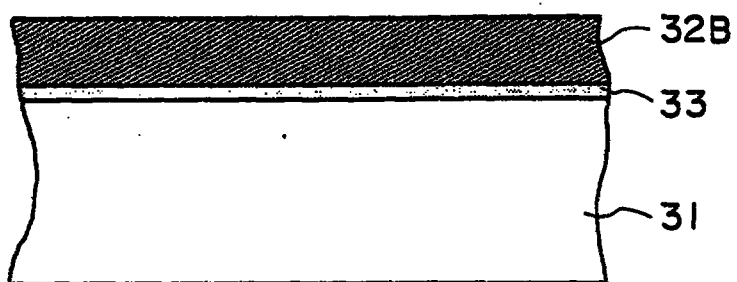


FIG. 5

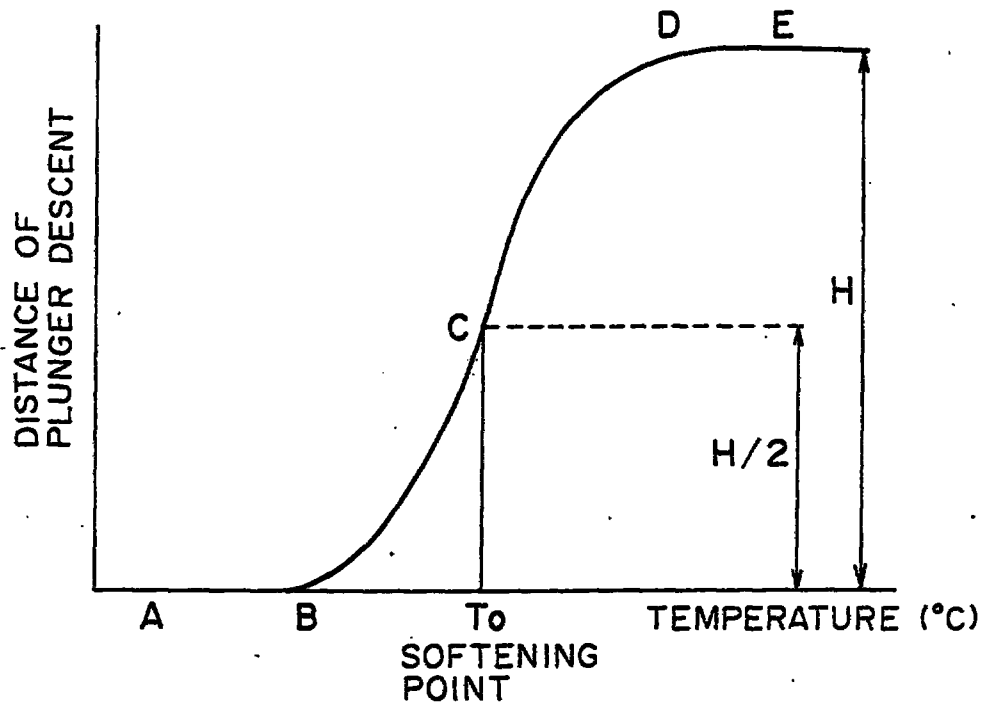
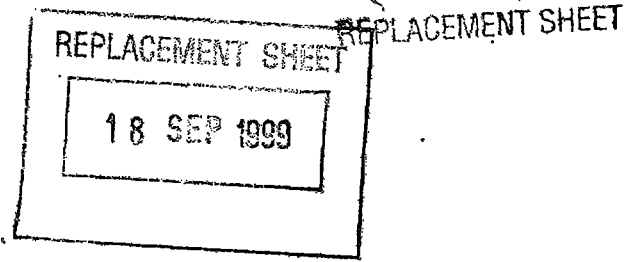


FIG. 6

P↑

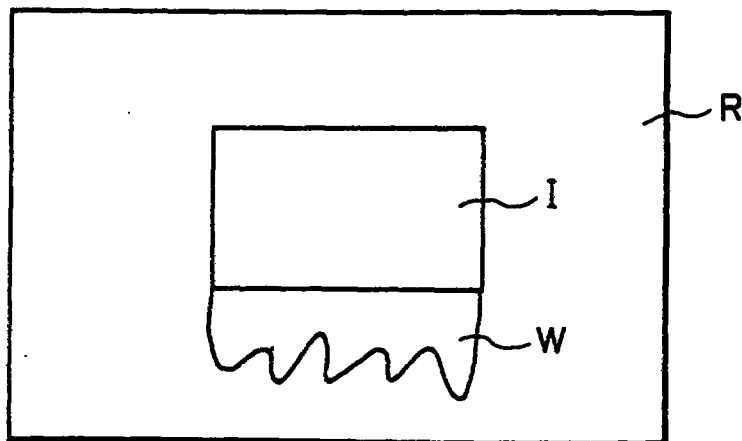


FIG. 8

18 SEP 1999



(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 501 360 A1

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **92103027.6**(51) Int. Cl.⁵: **G03G 7/00**(22) Date of filing: **24.02.92**

(30) Priority: **25.02.91 JP 50152/91**
11.03.91 JP 70479/91
06.11.91 JP 289936/91

(43) Date of publication of application:
02.09.92 Bulletin 92/36

(84) Designated Contracting States:
DE FR GB IT

(71) Applicant: **CANON KABUSHIKI KAISHA**
30-2, 3-chome, Shimomaruko, Ohta-ku
Tokyo(JP)

(72) Inventor: **Kanbayashi, Makoto, c/o Canon**
Kabushiki Kaisha
3-30-2 Shimomaruko
Ohta-ku, Tokyo(JP)
Inventor: **Menjo, Takeshi, c/o Canon**
Kabushiki Kaisha
3-30-2 Shimomaruko
Ohta-ku, Tokyo(JP)
Inventor: **Nagatsuka, Takayuki, c/o Canon**
Kabushiki Kaisha
3-30-2 Shimomaruko

Ohta-ku, Tokyo(JP)
Inventor: **Kasuya, Takashige, c/o Canon**
Kabushiki Kaisha

3-30-2 Shimomaruko
Ohta-ku, Tokyo(JP)
Inventor: **Nakamura, Tatsuya, c/o Canon**
Kabushiki Kaisha

3-30-2 Shimomaruko
Ohta-ku, Tokyo(JP)
Inventor: **Chiba, Tatsuhiko, c/o Canon**
Kabushiki Kaisha

3-30-2 Shimomaruko
Ohta-ku, Tokyo(JP)
Inventor: **Inaba, Kohji, c/o Canon Kabushiki**
Kaisha
3-30-2 Shimomaruko
Ohta-ku, Tokyo(JP)

(74) Representative: **Bühling, Gerhard, Dipl.-Chem.**
et al
Patentanwaltsbüro Tiedtke-Bühling-Kinne &
Partner, Bavariaring 4
W-8000 München 2(DE)

(54) **Laminate film for receiving toner image and method for forming fixed toner image on laminate film.**

(57) A laminate film suitable for providing a transparency for an OHP (overhead projector) is formed by disposing an absorbing layer on a substrate. The absorbing layer functions to allow addition of a wax component to a toner so as to improve the color mixing characteristic and anti-offset characteristic of the toner without causing a wax exudation trace which is liable to occur in a fixed toner image if the absorbing layer is not provided.

EP 0 501 360 A1

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced

