


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F16H 57/00	A1	(11) International Publication Number: WO 99/19643 (43) International Publication Date: 22 April 1999 (22.04.99)
(21) International Application Number: PCT/US98/12521 (22) International Filing Date: 17 June 1998 (17.06.98) (30) Priority Data: ① 08/949,009 ✓ 10 October 1997 (10.10.97) ✓ US ✓ ② 09/004,666 ✓ 8 January 1998 (08.01.98) ✓ US ✓ (71)(72) Applicant and Inventor: VITO, Robert, A. [US/US]; 1434 Sugartown Road, Berwyn, PA 19312 (US) (74) Agent: FIELDS, Scott, J.; Klehr, Harrison, Harvey, Branzburg & Ellers, LLP, 1401 Walnut Street, Philadelphia, PA 19102-3163 (US).	(81) Designated States: AU, BA, BB, BG, BR, CA, CN, CU, CZ, EE, GE, GW, HU, ID, IL, IS, JP, KP, KR, LG, LK, LR, LT, LV, MG, MK, MN, MX, NO, NZ, PL, RO, SG , SI, SK, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. ✓	

(54) Title: ANTI-THEFT BRAKE OR CLUTCH LOCKING DEVICE ✓

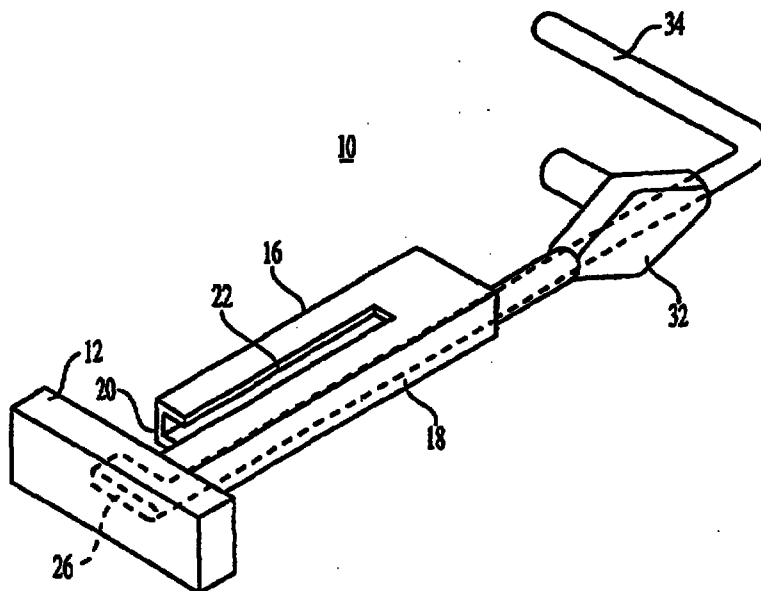

(57) Abstract

A device (10) for locking the brake or clutch of a vehicle and preventing its theft comprising: a base member (12) for a placement on the floorboard (35) of a vehicle beneath a brake pedal (13); a U-shaped housing (14) extending downward and having a first arm (18) attached to the base and having a second shorter arm (16) defining a gap (20) for receipt of a brake pedal shaft, said space between the first and second arms defining a slot (22) for receiving the brake pedal shaft (13) and permitting its full extension upward through said shaft; and locking means (32) associated with the second arm for locking the underside of the pedal within the slot (22) such that the brake pedal cannot be depressed.