

08/05/03
2003025731



162162

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 May 2002 (16.05.2002)

PCT

(10) International Publication Number
WO 02/38903 A1

(51) International Patent Classification: **E06B 3/663**

(21) International Application Number: PCT/US01/18282

(22) International Filing Date: 6 June 2001 (06.06.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/246,865 8 November 2000 (08.11.2000) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant: **TRUSEAL TECHNOLOGIES** [US/US];
23150 Commerical Park, Beachwood, OH 44122 (US).

Published:
— with international search report

74) Agent: **TUCKER, Todd, R.**; Renner Otto Boisselle & Sklar LLP, 1621 Euclid Avenue, 19th Floor, Cleveland, OH 44115 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **RIBBED TUBE CONTINUOUS FLEXIBLE SPACER ASSEMBLY**

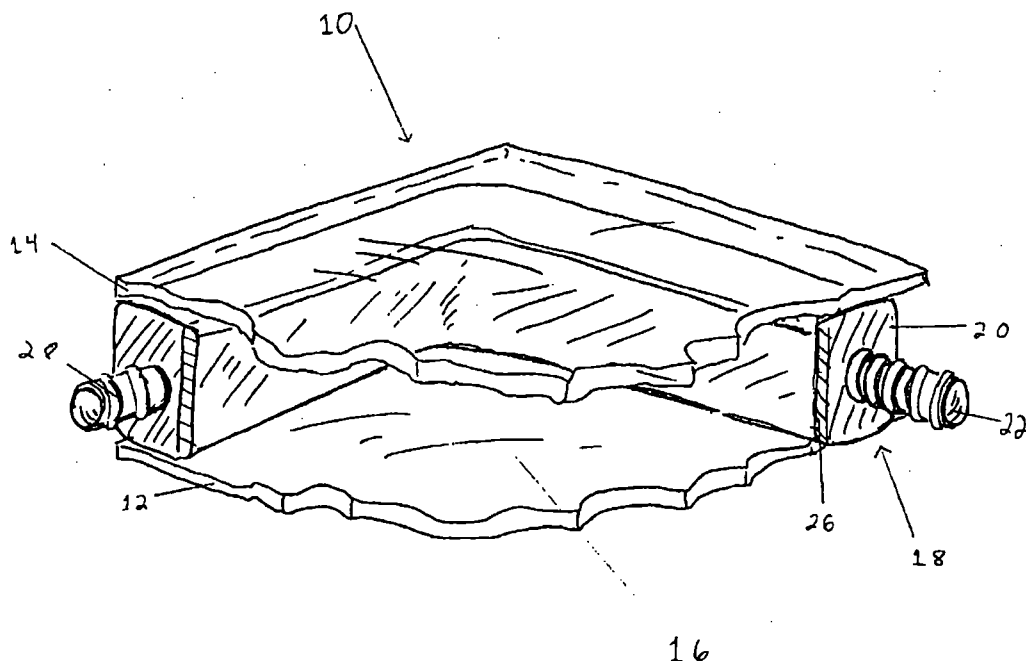

WO 02/38903 A1

(57) Abstract: A spacer assembly (18) is disclosed having a spacer (22) with a cross-section varying in a repeating manner along a longitudinal axis and an adhesive sealant (20) at least partially encapsulating the spacer (22). Also, a moisture vapor barrier may be provided as well as a desiccated topcoat (26).



ACTION