



- (51) International Patent Classification:
F04B 39/02 (2006.01) *F04B 39/12* (2006.01)
- (21) International Application Number:
PCT/BR2012/000452
- (22) International Filing Date:
14 November 2012 (14.11.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PI1105470-0 16 November 2011 (16.11.2011) BR
- (71) Applicant: **WHIRLPOOL S.A.** [BR/BR]; Av. das Nações Unidas, n° 12.995, 32° andar, Brooklin Novo, 04578-000 São Paulo - SP (BR).
- (72) Inventors: **BRÜGGMANN MÜHLE, Henrique**; Rua Quinze de Novembro, 1687, 89201-602 - Joinville - SC (BR). **LILIE, Dietmar Erich Bernhard**; Rua Orestes Guimarães, 904, 89204-060 - Joinville - SC (BR).
- (74) Agent: **DANNEMANN, SIEMSEN, BIGLER & IPAN-EMA MOREIRA**; Caixa Postal 2142, Rua Marquês de Olinda, 70, 22251-040 Rio de Janeiro - RJ (BR).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: SEALING GLOVE FOR A CYLINDER OF A COMPRESSOR, COMPRESSOR AND COOLING APPLIANCE

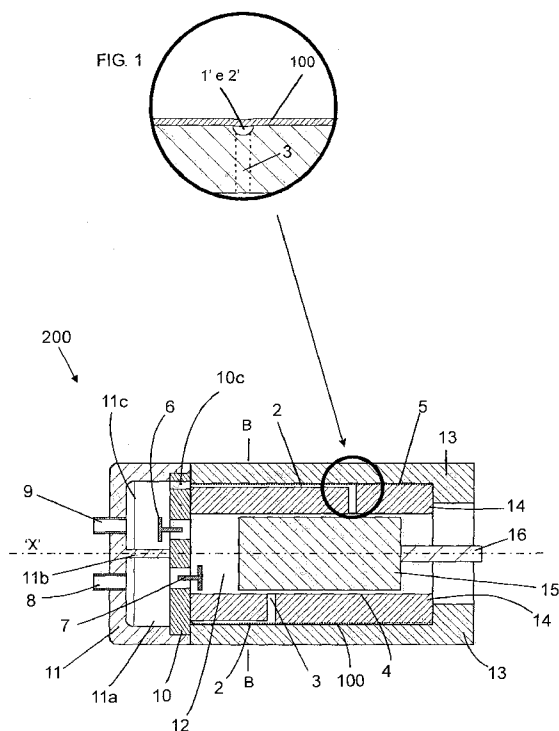


FIG. 2

(57) Abstract: The present invention refers to a flexible sealing glove (100) applicable under radial tension to aerostatic linear compressors (200), capable of sealing the bearing channels (1,2), which are located on the outer face (5) of the cylinder (14). The flexible sealing glove (100) is made of substantially polymeric material and its main functions are to increase the efficiency and the yield of the compressor (200).



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*