

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number
WO 00/75713 A1

(51) International Patent Classification⁷: G02B 26/10, G01B 11/03

(21) International Application Number: PCT/US00/15623

(22) International Filing Date: 7 June 2000 (07.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/327,817 8 June 1999 (08.06.1999) US

(71) Applicant: ROBOTIC VISION SYSTEMS, INC.
[US/US]; 423 Rabro Drive East, Hauppauge, NY 11788 (US).

(72) Inventor: LIU, Kuo-Ching; 41 Thompson Hay Path, Se-tauket, NY 11733 (US).

(74) Agents: HANDLER, Edward, J., III et al.; Kenyon & Kenyon, One Broadway, New York, NY 10004 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD/SYSTEM MEASURING OBJECT FEATURES WITH 2D AND 3D IMAGING COORDINATED

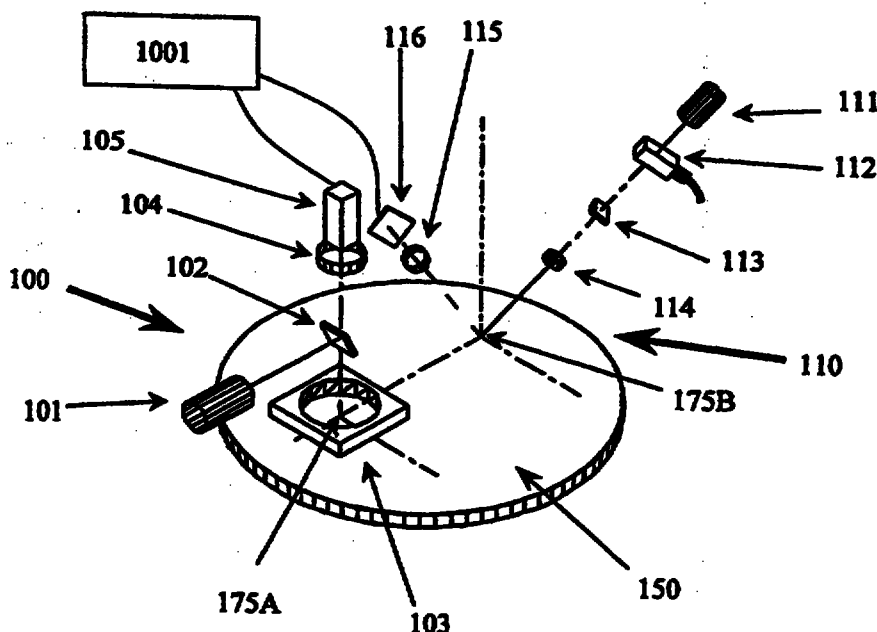

(57) Abstract: A system and method are disclosed for highly efficient imaging of selected object features utilizing, in combination, a 2D imaging subsystem (100) and a 3D imaging subsystem (110) wherein data from the 2D imaging subsystem (100) is used to predetermine areas containing 3D features of interest such that delay attributable to imaging of areas of non-interest for 3D features is minimized.

WO 00/75713 A1