

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(10) 国际公布号
WO 2021/228095 A1

(43) 国际公布日
2021 年 11 月 18 日 (18.11.2021)

(51) 国际专利分类号:
H04W 24/02 (2009.01) *H04W 24/08* (2009.01)

(21) 国际申请号: PCT/CN2021/093092

(22) 国际申请日: 2021 年 5 月 11 日 (11.05.2021)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
202010414606.5 2020 年 5 月 15 日 (15.05.2020) CN
202011127030.0 2020 年 10 月 20 日 (20.10.2020) CN

(71) 申请人: 华为技术有限公司 (HUAWEI TECHNOLOGIES CO., LTD.) [CN/CN]; 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。


(72) 发明人: 胡星星 (HU, Xingxing); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。 张宏平 (ZHANG, Hongping); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。

(74) 代理人: 北京润泽恒知识产权代理有限公司 (BEIJING RUN ZEHENG INTELLECTUAL PROPERTY LAW FIRM); 中国北京市海淀区中关村南大街 31 号神舟大厦 702, Beijing 100081 (CN)。

(81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT,

(54) Title: COMMUNICATION METHOD AND COMMUNICATION APPARATUS

(54) 发明名称: 通信方法和通信装置

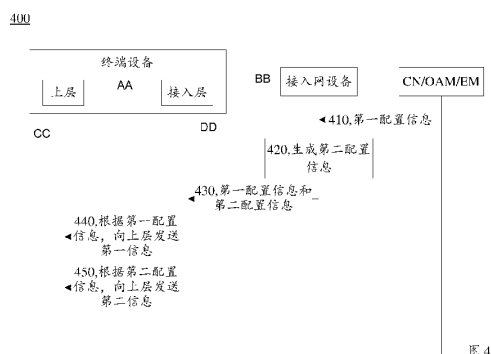

410 First configuration information
420 Generate second configuration information
430 First configuration information and second configuration information
440 Send first information to an upper layer according to the first configuration information
450 Send second information to the upper layer according to the second configuration information
AA Terminal device
BB Access network device
CC Upper layer
DD Access layer

(57) Abstract: The present application provides a communication method and a communication apparatus. The communication method comprises: an access network device receives first configuration information, the first configuration information being used for instructing a terminal device to perform quality of experience (QoE) measurement of an application layer; the access network device generates second configuration information, the second configuration information being used for instructing, by the access network device, the terminal device to report the measurement result of at least a part of measured amounts obtained by means of the QoE measurement;

[见续页]

JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:

— 包括国际检索报告(条约第21条(3))。

the access network device sends to the terminal device the first configuration information and the second configuration information. Therefore, in embodiments of the present application, the access network device sends the second configuration information to the terminal device to achieve that the access network device instructs the terminal device to report the measurement result of at least a part of the measured amounts obtained when the terminal device performs the QoE measurement, so that the access network device can sense the measurement result of the QoE measurement.

(57) 摘要: 本申请提供一种通信方法和通信装置。该通信方法包括: 接入网设备接收第一配置信息, 所述第一配置信息用于指示终端设备进行应用层的体验质量QoE测量; 所述接入网设备生成第二配置信息, 所述第二配置信息用于所述接入网设备指示所述终端设备上报所述QoE测量得到的至少部分测量量的测量结果; 所述接入网设备向所述终端设备发送所述第一配置信息和所述第二配置信息。因此, 本申请实施例中, 接入网设备通过向终端设备发送第二配置信息, 实现该接入网设备指示终端设备上报终端设备在进行QoE测量时得到的至少部分测量量的测量结果, 从而使得接入网设备能够感知到QoE测量的测量结果。