



- (51) International Patent Classification:
H04L 29/06 (2006.01)
- (21) International Application Number:
PCT/CN2012/072183
- (22) International Filing Date:
12 March 2012 (12.03.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
201110104879.0 26 April 2011 (26.04.2011) CN
- (71) Applicant (for all designated States except US): **INTERNATIONAL BUSINESS MACHINES CORPORATION** [US/US]; New Orchard Road, Armonk, New York 10504 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LI, Yan** [CN/CN]; IBM China, Building 19 Zhongguancun Software Park, 8 Dongbeiwang West Road, Haidian District, Beijing 100193 (CN). **ZHOU, Haofeng** [CN/CN]; IBM China, 6/F, Building 10, 399 Ke Yuan Road, Zhangjiang Hi-Tech Park, Pudong New District, Shanghai 201203 (CN). **WEI, Wei** [CN/CN]; IBM China, 6/F, Building 10, 399 Ke Yuan Road, Zhangjiang Hi-Tech Park, Pudong New District, Shanghai 201203 (CN). **ZHENG, Kai** [CN/CN]; IBM China, Building 19 Zhongguancun Software Park, 8 Dongbeiwang West Road, Haidian District, Beijing 100094 (CN).
- (74) Agent: **ZHONGZI LAW OFFICE**; 7F, New Era Building, 26 Pinganli Xidajie, Xicheng District, Beijing 100034 (CN).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AUTHENTICATION INFORMATION PROCESSING

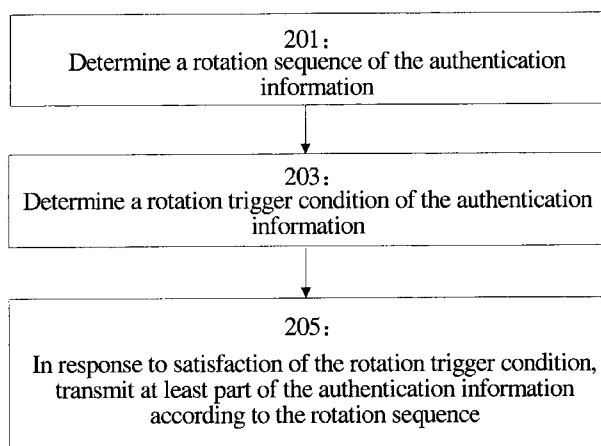


Fig.2

(57) Abstract: The present invention relates to an authentication information processing technology, which enables the authentication information to rotate among multiple authentication nodes, such that hackers cannot obtain the authentication information permanently. Specifically, the present invention provides an authentication information processing method, wherein the authentication information is stored on a first authentication node, comprising: determining a rotation sequence of the authentication information; determining a rotation trigger condition of the authentication information, and transmit at least part of the authentication information to a second authentication node so that the second authentication node processes the authentication request related to the authentication information according to the rotation sequence in response to satisfaction of the rotation trigger condition.

