



(51) International Patent Classification:
E03F 5/04 (2006.01)

(21) International Application Number:
PCT/EP2012/076008

(22) International Filing Date:
18 December 2012 (18.12.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12153111.5 30 January 2012 (30.01.2012) EP

(72) Inventor; and

(71) Applicant : DANNRUP, Niels [SE/SE]; Villatomtsvägen
5A, S-252 34 Helsingborg (SE).

(72) Inventor: PÄIVIÖ, Asko; Per Albin Hanssons väg 50 A,
S-214 63 Malmö (SE).

(74) Agent: LARSSON, Malin; Awapatent AB, Box 1066, SE-
251 10 Helsingborg (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A DEVICE AND A METHOD FOR FILTERING STORMWATER

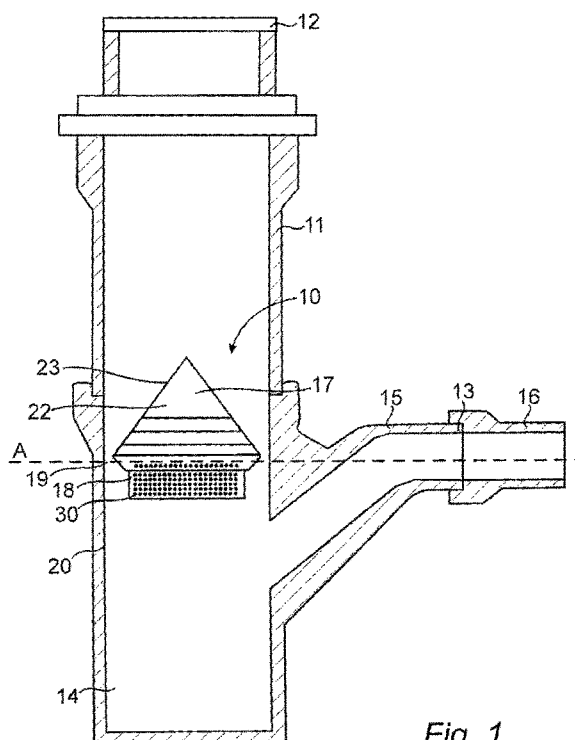


Fig. 1

(57) Abstract: A device (10) for filtering stormwater inside a storm drain (11), wherein the device (10) comprises a filter unit (17) and a floating carrier (18) for carrying the filter unit (17), wherein the filter unit (17) comprises a bottom portion (21) and a top portion (22), and wherein the carrier (18) comprises an axially extending recess (28) for receiving the bottom portion (21) of the filter unit (17), so that at least a part of the bottom portion (21) of the filter unit (17) is arranged below a surface (A) of the stormwater inside the storm drain (11) when the device (10) is arranged therein, and through apertures (30) extending radially from an outer surface of the carrier (18) to the recess (28), so that stormwater at the surface (A) can pass through the apertures (30) and reach the bottom portion (21) of the filter unit (17). Also a method for filtering stormwater inside a storm drain (11) is disclosed.