

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 July 2003 (24.07.2003)


PCT

(10) International Publication Number
WO 03/059453 A1

- (51) International Patent Classification⁷: **A62C 35/02**, 35/68, F16K 17/04
- (21) International Application Number: PCT/FI03/00028
- (22) International Filing Date: 16 January 2003 (16.01.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20020089 17 January 2002 (17.01.2002) FI
- (71) Applicant (for all designated States except US): **MAR-IOFF CORPORATION OY** [FI/FI]; P.O.BOX 25, Hakamäenkuja 4, FIN-01510 Vantaa (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI). **METZGER, Harry** [FI/FI]; Aleksis Kiven tie 49, FIN-04200 Kerava (FI).
- (74) Agent: **HEINÄNEN OY**; Annankatu 31-33 C, FIN-00100 Helsinki (FI).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**
— of inventorship (Rule 4.17(iv)) for US only
- Published:**
— with international search report

[Continued on next page]

(54) Title: VALVE ELEMENT

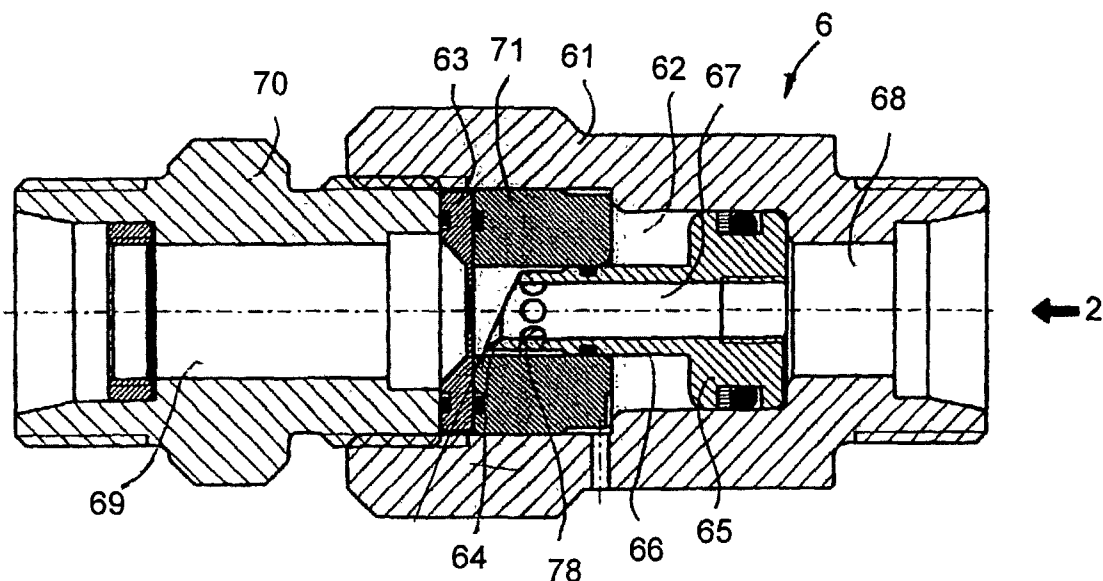

(57) Abstract: Valve element (3, 6, 10), comprising a frame, at least one inlet and at least one outlet, a passage connecting the inlet and outlet, at least one burst disk (13, 35, 63) or equivalent, which, when unbroken, closes the passage from inlet to outlet, and a piston element (15, 36, 65) provided with a piercing element or the like for piercing the burst disk. The piston element (15, 36, 65) is provided with a passage (17, 39, 67) for a pressure medium, said passage extending axially through the piston element from one first side to one second side, which passage leading through the piston forms a part of the passage of the pressure medium after the burst disk (13, 35, 63) has been pierced.



WO 03/059453 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.