


(51) International patent classification: Not classified	A2	(11) International publication number: WO 99/43193 (43) International publication date: 2 September 1999 (02.09.99)
(21) International application number: PCT/CH99/00261 (22) International filing date: 16 June 1999 (16.06.99) (71) Applicant (for all designated States except US): PHONAK AG [CH/CH]; Laubisrütistrasse 28, CH-8712 Stäfa (CH). (72) Inventor; and (75) Inventor/Applicant (US only): DITTLI, Erich [CH/CH]; Bahnhofstrasse 15e, CH-8864 Reichenburg (CH). (74) Attorney: TROESCH SCHEIDEGGER WERNER AG; Siewerdstrasse 95, Postfach, CH-8050 Zurich (CH).		(81) Designated states: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO Patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
		Published <i>On request of the Applicant, before expiry of the stipulated period allowed in accordance with Article 21 paragraph 2(a). Without the International Search Report and to be republished once the report has been received.</i> <i>Without classification; description and abstract not examined by the International Searching Authority.</i>

As printed

(54) Title: BEHIND-THE-EAR HEARING AID

(54) Bezeichnung: HINTEROHR-HÖRGERÄT

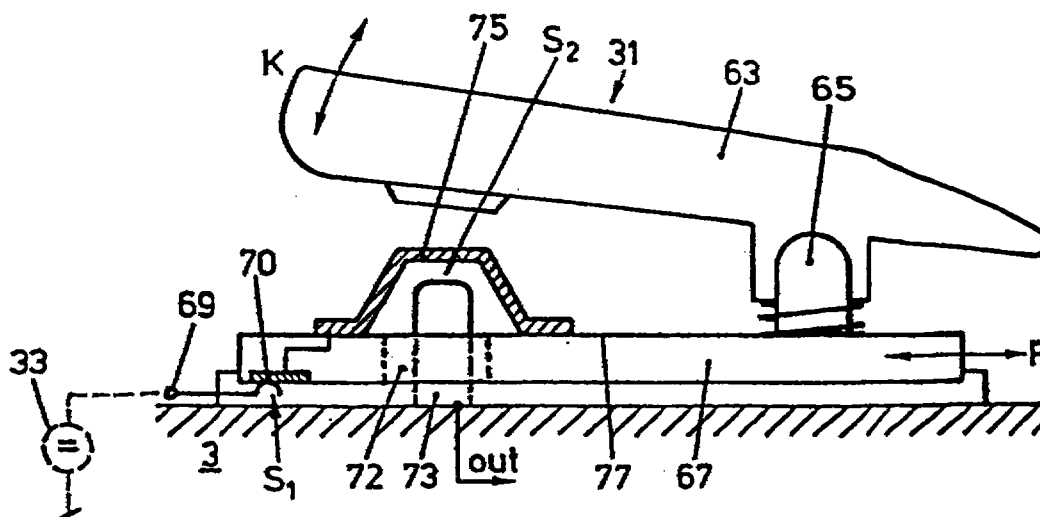

(57) Abstract

The invention relates to a behind-the-ear hearing aid comprising an actuating element (31) which can be actuated in two different directions (K, F) and has different switching functions in each direction.

(57) Zusammenfassung

An einem Hinterohr-Hörgerät wird ein Bedienungselement (31) vorgesehen, welches in zwei unterschiedlichen Richtungen (K, F) bedienbar ist und in diesen je unterschiedliche Schaltfunktionen ausübt.