



(51) International Patent Classification:

E02B 17/06 (2006.01) *B66F 7/00* (2006.01)
E02B 17/08 (2006.01) *B63B 35/00* (2006.01)
E02B 17/04 (2006.01)

(21) International Application Number:

PCT/SG2015/050288

(22) International Filing Date:

31 August 2015 (31.08.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicants: **KEPPEL OFFSHORE & MARINE TECHNOLOGY CENTRE PTE LTD** [SG/SG]; 50 Gul Road, Singapore 629351 (SG). **OFFSHORE TECHNOLOGY DEVELOPMENT PTE LTD.** [SG/SG]; 50 Gul Road, Singapore 629351 (SG).

(72) Inventors: **PERRY, Michael John**; 26, Bukit Batok East Ave 2, #16-11, Singapore 659920 (SG). **QUAH, Chin Kau**; Blk 104A, Edgefield Plains, #10-37, Singapore 821104 (SG). **FOO, Kok Seng**; Blk 719, Jurong West Ave 5, #03-56, Singapore 640719 (SG).

(74) Agent: **PYPRUS PTE LTD**; 7500A, Beach Road, #07-301, The Plaza, Singapore 199591 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FIXATION SYSTEM FOR HYDRAULIC JACKING SYSTEM

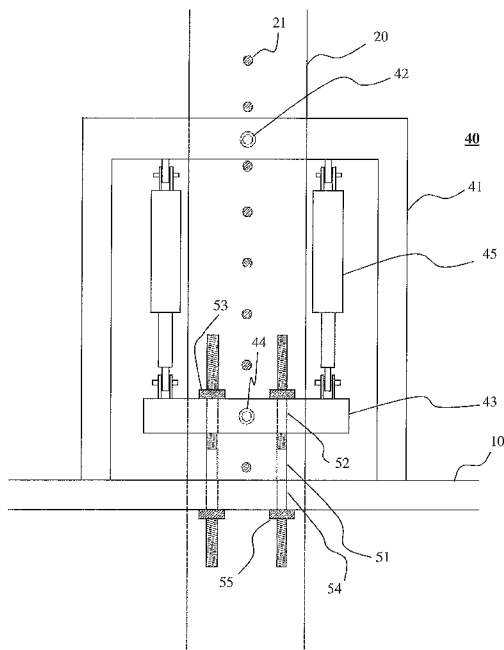


FIG 3

(57) Abstract: A self-elevating platform comprises a deck structure, a plurality of legs, a plurality of footings, and a jacking system, wherein the plurality of legs pass through the deck structure and are supported by the plurality of footings; and wherein the jacking system comprises a jackcase structure with a first locking pin, a jacking yoke with a second locking pin, a plurality of jacking cylinders with a first end and second end, where the first end of the jacking cylinders is supported by the jackcase structure, and the second end of the jacking cylinders by the jacking yoke; and a fixation system comprising a plurality of tension rods, wherein each tension rod has a first end and a second end, and wherein the first end of the tension rods is securely coupled with the jacking yoke, and the second end of the tension rods is securely coupled with the deck structure; thereby when the plurality of tension rods secures the jacking yoke to the deck structure, the load can be removed from the hydraulic cylinders and transferred to the fixation system.