



(51) International Patent Classification:
F41H 3/02 (2006.01)

(21) International Application Number:
PCT/IB2024/060591

(22) International Filing Date:
28 October 2024 (28.10.2024)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
202023000004707 13 November 2023 (13.11.2023) IT

(72) Inventor; and

(71) Applicant: **PLINI, Emanuele** [IT/IT]; Viale Leonardo Da Vinci, 226, 00145 Roma (IT).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

(54) Title: MULTILAYER MATERIAL FOR THE CREATION OF A MULTISPECTRAL (VIS-NIR-TIR) INDIVIDUAL CAMOUFLAGE

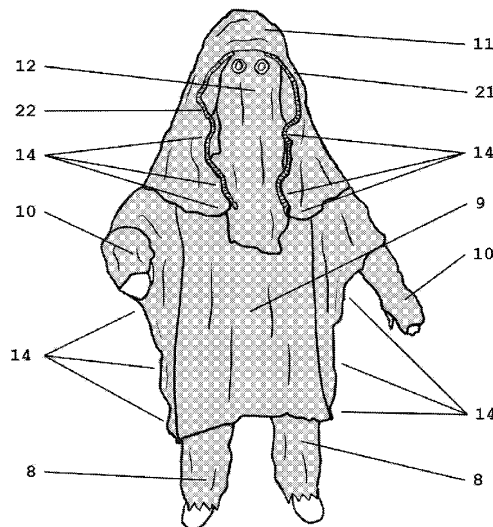


Fig. 4

(57) Abstract: A multilayer material (1) for the creation of a multispectral individual camouflage suit (VIS-NIR-TIR), has: - a sheer/semi-sheer layer (4) with a light transmission level between 20% and 80% / between 80 and 15 deniers, weighing between 40 g/m² and 80 g/m², printed with VIS and NIR camouflage colors with low infrared refraction (NIR 20% - 40%), and - a coated layer (5), coated by spreading (metal-plated) including the following metals: copper between 10% and 35%, nickel between 2% and 10%, aluminum between 5% and 15%, silver between 5% and 40%, titanium between 5% and 25%

[Continued on next page]

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*