

FIG. 1

Send first information to a network-side device in a case of interference, where the first information includes at least one of the following: first indication information, where the first indication information is used to indicate first expectation information autonomously determined by a terminal, and the first expectation information includes a type of each transmission time position in a transmission period; and carrier type information, where the carrier type information corresponds to the first expectation information, or the carrier type information corresponds to second expectation information selected and determined by the terminal

FIG. 2

00	00	10	01	01
----	----	----	----	----

FIG. 3a

UL	UL	F	DL	DL
----	----	---	----	----

FIG. 3b

00000	00100	10001	01000	01100
-------	-------	-------	-------	-------

FIG. 4a

UL (expected UL)	UL (non-expected UL)	F (expected UL)	DL (expected DL)	DL (non-expected DL)
---------------------	-------------------------	--------------------	---------------------	-------------------------

FIG. 4b

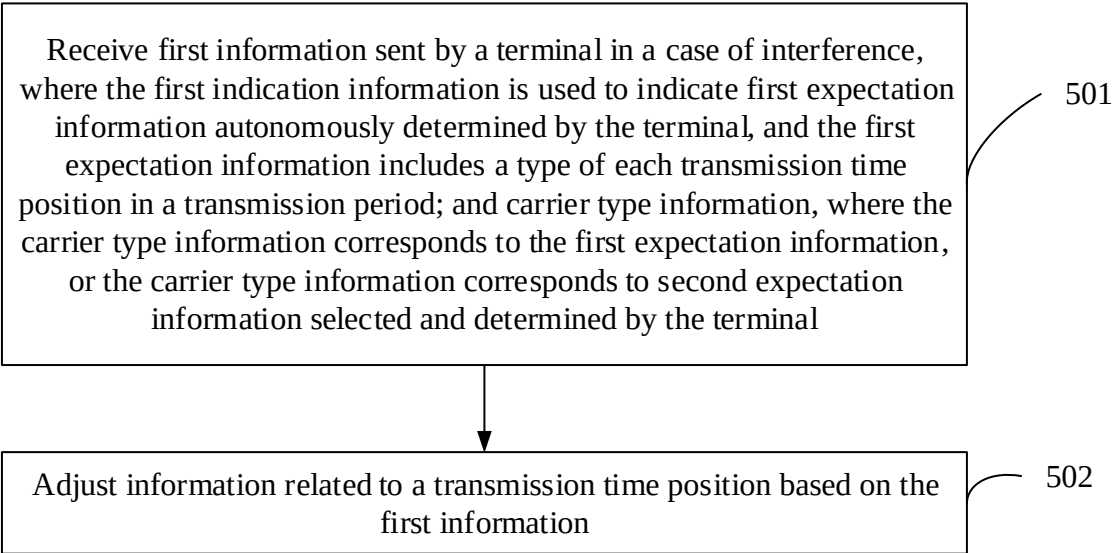


FIG. 5

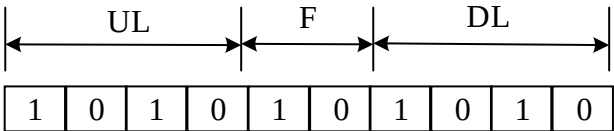


FIG. 6

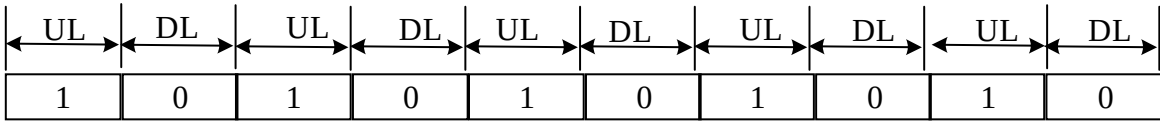


FIG. 7

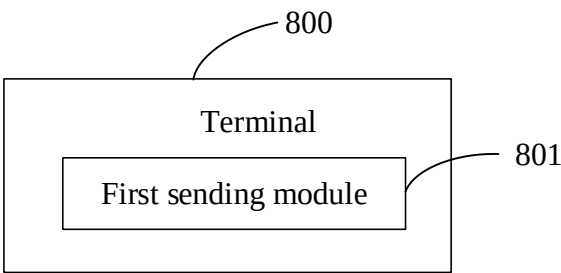


FIG. 8

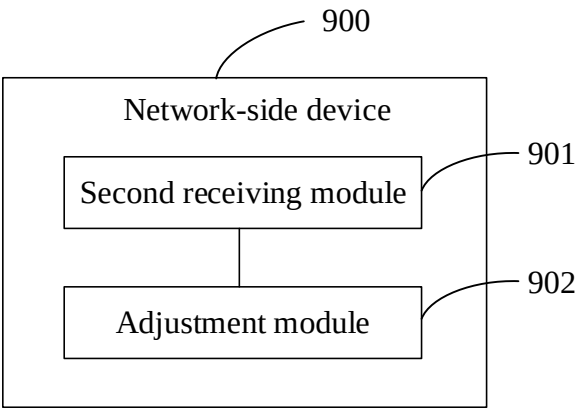


FIG. 9

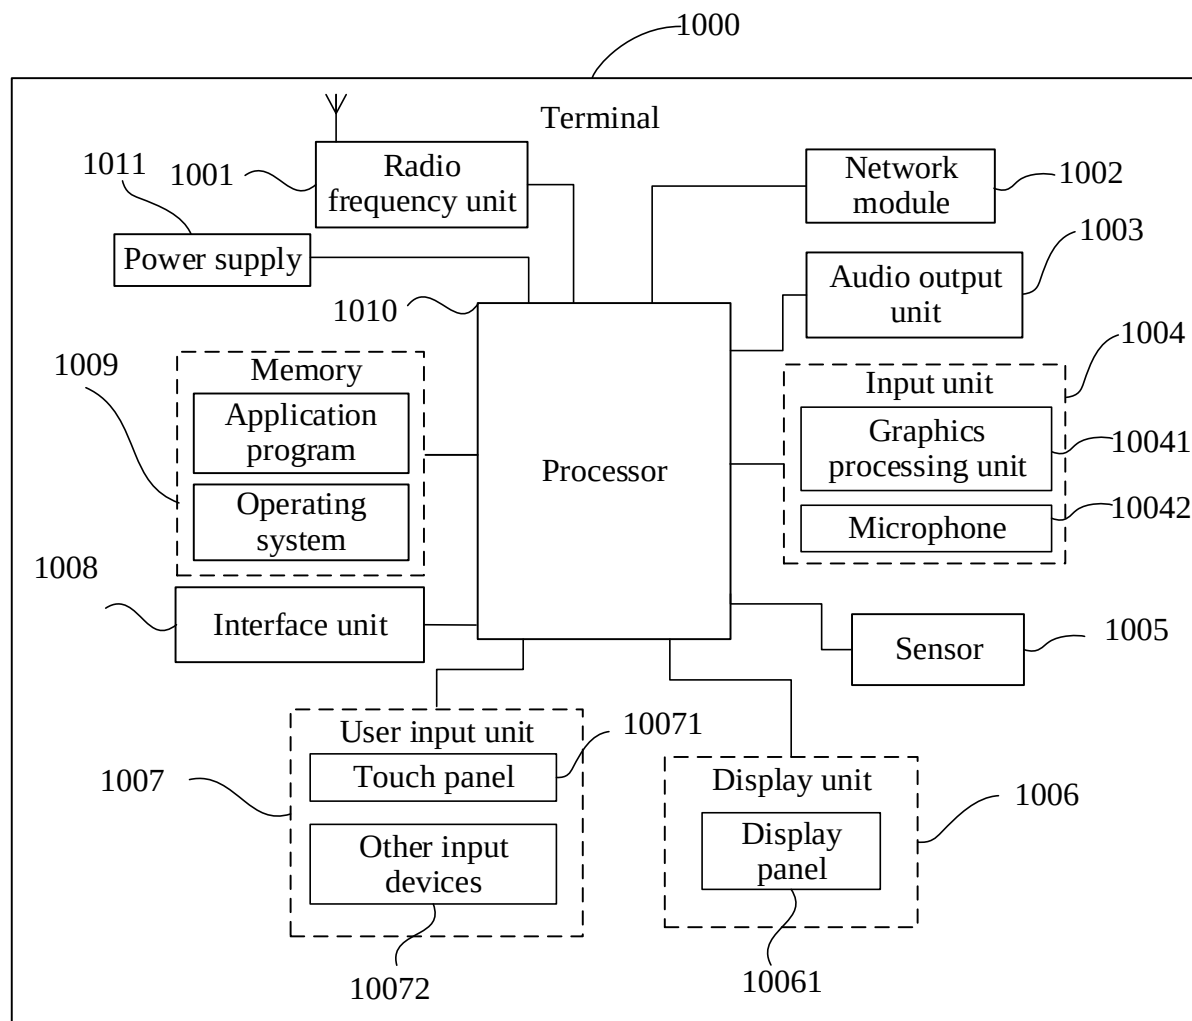


FIG. 10

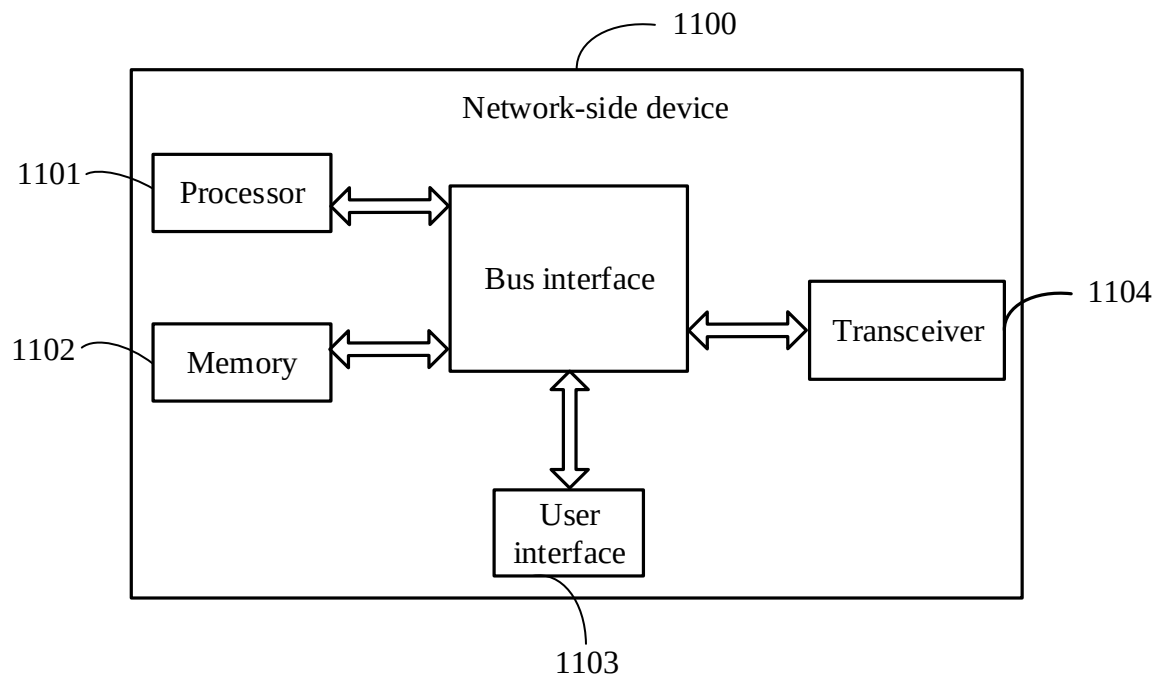


FIG. 11