



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶ : A62C 31/05, B05B 1/14, 1/34	A1	(11) International Publication Number: WO 95/31252 (43) International Publication Date: 23 November 1995 (23.11.95)
(21) International Application Number: PCT/FI95/00260 (22) International Filing Date: 17 May 1995 (17.05.95) (30) Priority Data: 942299 17 May 1994 (17.05.94) FI 942667 6 June 1994 (06.06.94) FI (71)(72) Applicant and Inventor: SUNDHOLM, Göran [FI/FI]; Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI). (74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).	(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Swedish).	

RTMP's copy
(in English)

(54) Title: **SPRINKLER**

(57) Abstract

The invention relates to sprinkler comprising a frame (2, 8, 2', 2''), into which at least one nozzle (15, 15', 15'') has been mounted, whereby the frame has a fluid inlet (5, 5', 5'') and a passage (13, 13', 13'') for conveying extinguishing medium to at least one nozzle (15, 15', 15''), whereby the sprinkler, in a standby state, has a heat-sensitive release means (22, 22', 22''), which is in contact with a spindle (16, 16', 16'') slidably arranged in a conduit (13, 13', 13'') having an inlet (11) and an outlet (14) to said nozzle. To provide a new sprinkler that ensures an even and straightlined load on the release means (22) without breaking the release means due to a high fluid pressure, the sprinkler is characterized in that the conduit is composed of a channel (13, 13', 13''), the wall of which the spindle (16, 16', 16'') is arranged in a slidable or almost slidable contact with, and that the spindle and the channel extend on both sides of the channel (13, 13', 13'') inlet (11, 11', 11'') in order to at least partially balance the fluid pressure in the inlet when the sprinkler is in the standby state.

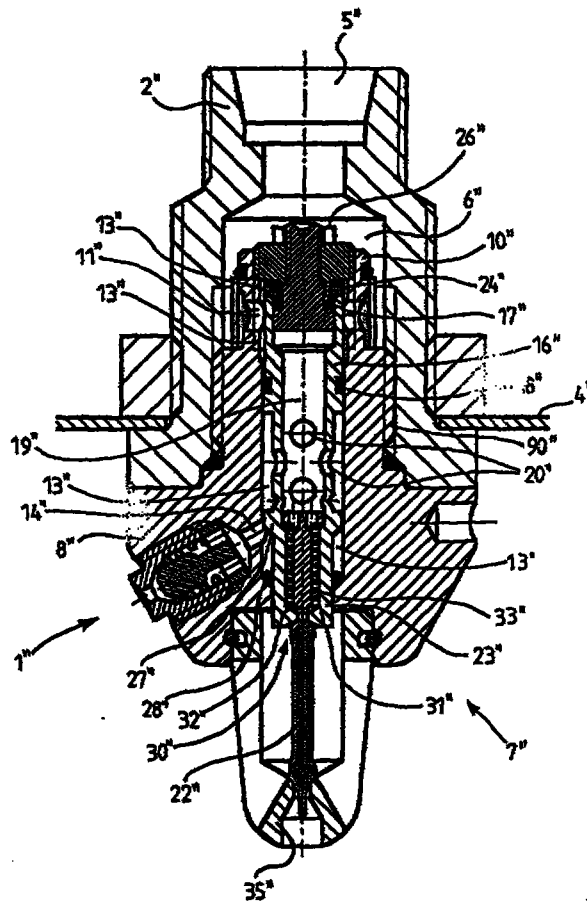

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

96 1 19 95 - 3

114. NOV 1996