


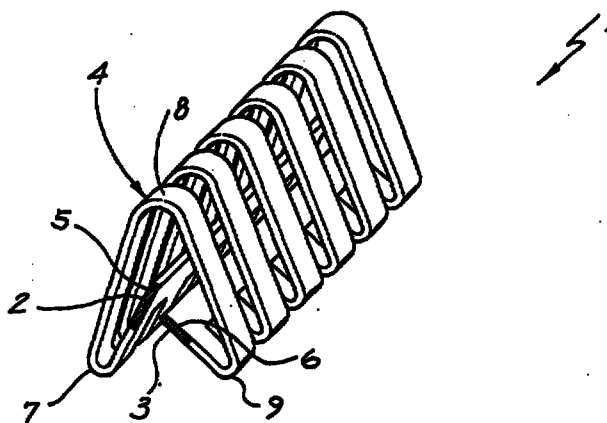

Romp
WPM

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01R 25/14, H02G 5/04	A1	(11) International Publication Number: WO 96/12327 (43) International Publication Date: 25 April 1996 (25.04.96)
(21) International Application Number: PCT/AU95/00675 (22) International Filing Date: 12 October 1995 (12.10.95) (30) Priority Data: PM 8815 14 October 1994 (14.10.94) AU PM 9833 2 December 1994 (02.12.94) AU PN 4299 20 July 1995 (20.07.95) AU (71)(72) Applicant and Inventor: SINCLAIR, John, Ashton [AU/AU]; Lot 1731, Combyne Road, Wingham, NSW 2429 (AU). (74) Agent: SPRUSON & FERGUSON; G.P.O. Box 3989, Sydney, NSW 2001 (AU).		(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, <u>SG</u> , SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published <i>With international search report.</i> SG 9701609-1

(54) Title: FLEXIBLE ELECTRICAL CONDUCTOR**(57) Abstract**

A flexible electrically conductive track including an elongated flexible insulating member (150) providing at least one longitudinally extending slot (159) to receive an electric conductor (158). The conductor (158) includes a pair of generally parallel co-extensive contact strips (165) joined by a plurality of transverse ribs (166). The slots (159) are closed by resiliently displaceable flanges (161) which are displaced to provide access to the conductor (158).