



- (51) International Patent Classification:
F04D 29/34 (2006.01) *F04D 29/38* (2006.01)
- (21) International Application Number:
PCT/US2013/022963
- (22) International Filing Date:
24 January 2013 (24.01.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/590,469 25 January 2012 (25.01.2012) US
- (71) Applicant: **DELTA T CORPORATION** [US/US]; 2425 Merchant Street, Lexington, KY 40511 (US).
- (72) Inventors: **HOLLAN, C., Jason**; 336 Valley Brook Drive, Lexington, KY 40511 (US). **FIZER, Richard, W.**; 2512 Bridle Court, Lexington, KY 40504 (US).
- (74) Agents: **DORISIO, Andrew, D.** et al.; King & Schickli, PLLC, 257 North Broadway, Lexington, Kentucky 40514 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: FAN WITH RESILIENT HUB

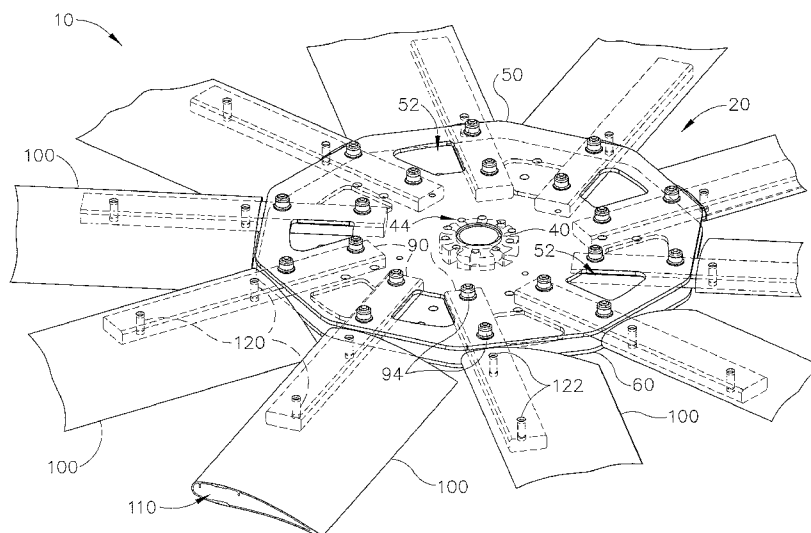


Fig.2

(57) Abstract: A resilient hub assembly comprises a top plate, bottom plate, central hub, and outer spars. The central hub is coupled between the top plate and the bottom plate. The outer spars are coupled between the top plate and the bottom plate, and the outer spars are positioned in a circular arrangement about a common longitudinal axis of the top plate and the bottom plate. The resilient hub assembly is configured to be flexible. The top plate and/or the bottom plate may comprise cutouts, and/or the outer spars may be positioned as to allow a gap between the central hub and the outer spars to promote flexibility.

