

DESCRIPTION
CHARGE-TRANSPORTING VARNISH

5

TECHNICAL FIELD

The present invention relates to a charge-transporting varnish and its products in the form of charge-transporting thin film, organic electroluminescence (abbreviated as
10 organic EL hereinafter) element, and solar cell.

BACKGROUND ART

Organic EL elements are broadly classified into low weight molecular type organic EL (OLED for short hereinafter)
15 elements and polymer type organic EL (PLED for short hereinafter) elements.

It has been reported that an OLED element is improved in initial characteristic properties (such as low drive voltage and high luminous efficiency) and life if it is
20 provided with a copper phthalocyanine (CuPC) layer as the hole injection layer. (Refer to Non-Patent Document 1: Applied Physics Letters, US, 1996, vol. 69, pp. 2160-2162)

It has been reported that a PLED element is also improved as in the case of OLED mentioned above if it is
25 provided with a hole transporting layer (buffer layer) made from a polyaniline type material or a polythiophene type material. (For the former, refer to Non-Patent Document 2: Nature, UK, 1992, vol. 357, pp. 477-479, and Non-Patent Document 3: Applied Physics Letters, US, 1994, vol. 64,
30 pp.1245-1247. For the latter, refer to Non-Patent Document 4: Applied Physics Letters, US, 1998, vol. 72, pp. 2660-2662)

It has been reported that an organic EL element is improved in initial characteristic properties if it is provided (at its cathode side) with an electron injection
35 layer made from any of the following materials. Metal oxide (refer to Non-Patent Document 5: IEEE Transaction on Electron Devices, US, 1997, vol. 44, pp. 1245-1248); metal halide

(refer to Non-Patent Document 6: Applied Physics Letters, US, 1997, vol. 70, pp. 152-154); metal complex (refer to Non-Patent Document 7: Japanese Journal of Applied Physics, 1999, vol. 38, pp. 1348-1350)

5 The hole injection material for OLED elements is mostly a material for deposition. The disadvantage of a material for deposition is that it should meet several requirements. For example, it should be an amorphous solid, it should be sublimable, it should have good heat resistance,
10 and it should have an adequate ionization potential (I_p for short hereinafter). This disadvantage narrows the range of choice for materials for deposition. Another disadvantage of a material for deposition is difficulties with electrically doping. The disadvantage prevents a material for deposition
15 from exhibiting a high charge transporting performance. The result is that the charge injection efficiency remains low. CuPC as a commonly used hole injection material has a highly irregular shape and adversely affects the characteristic properties even when a very small quantity of it enters the
20 other organic layer.

 The hole transporting material for PLED elements should meet such requirements as high charge transporting performance, insolubility in a solvent for luminous polymer such as toluene, and adequate I_p . Polyaniline type material
25 and polythiophene type material, which are commonly used at present, suffer several disadvantages as follows. They contain water as a solvent which might accelerate degradation of elements. They have a limited range of choice for solvents because of their low solubility. They are liable to
30 aggregation. They are restricted in methods for forming uniform film.

 Meanwhile, there has recently been found a charge transporting varnish (in the form of organic solution) which contains a low-molecular-weight oligoaniline type material as
35 the charge-transporting substance. It has been reported that an organic EL element exhibits outstanding characteristic properties if it is provided with a hole injection layer made

from the charge transporting varnish. (Refer to patent document 1: JP 2002-151272A.)

However, the charge-transporting varnish containing the low-molecular-weight charge-transporting substance (which
5 may be incorporated with a charge accepting dopant substance) presents difficulties in forming a highly flat film. In addition, it usually has a low viscosity because the charge-transporting substance has a low molecular weight and hence a low viscosity. The varnish with a low viscosity
10 presents difficulties in various coating process by printing, ink-jet spraying, and the like.

A common way to adjust the viscosity of varnish is by changing the molecular weight of the material or incorporating the material with a thickening agent.

15 However, change in the molecular weight of the charge-transporting material is accompanied by a great change in physical properties, such as charge transporting performance, I_p , solubility, and morphology. Thus it is difficult to adjust the viscosity without changing other
20 physical properties. On the other hand, incorporation with a thickening agent tends to deteriorate the charge transporting performance.

For reasons mentioned above, it is difficult to adequately adjust the viscosity of the varnish while
25 maintaining other properties such as charge transporting performance.

The present invention was completed in view of the foregoing. It is an object of the present invention to provide an improved charge-transporting varnish and its
30 products in the form of charge-transporting thin film, organic EL element, and solar cell. The above-mentioned charge-transporting varnish exhibits highly uniform film-forming performance even in the system containing a low-molecular-weight charge transporting substance and a
35 charge accepting dopant substance. When used in an OLED element or a PLED element, it exhibits outstanding EL

characteristics, such as low drive voltage, high luminous efficiency, and long life.

DISCLOSURE OF INVENTION

The inventors found that a varnish containing an organic charge-transporting substance, particularly an oligomeric one having a number-average molecular weight no higher than 5000, dissolved in a solvent tends to give rise to a film with surface irregularities due to aggregation after application and solvent evaporation, because it has a great intermolecular force due to its stacking effect and hence is poorer in dispersibility than polymeric materials having a sufficiently high molecular weight. On the basis of this finding, the present inventors carried out a series of researches to achieve the above-mentioned objective. As a result, it was found that a varnish containing a charge-transporting substance (or a charge-transporting organic material composed of a charge-transporting substance and a dopant) which is dissolved or uniformly dispersed in a high-viscosity solvent with a specific viscosity has a comparatively low flowability and prevents the material and solvent from aggregating due to solvent evaporation at the time of film formation. Thus, the varnish gives rise to a highly uniform thin film that can be used as the hole injection layer of organic EL elements. The resulting organic EL elements are found to have a low drive voltage, an improved luminous efficiency, and an extended life. These findings led to the present invention.


In a first aspect, there is provided a charge-transporting varnish which comprises a charge-transporting substance composed of a charge-transporting monomer or a charge-transporting oligomer having a number-average molecular weight of 200 to 5,000, or polymer having a number-average molecular weight of 200 to 500,000, or a charge-transporting organic material composed of said charge-transporting substance and an electron accepting dopant substance or hole accepting dopant substance, and a solvent containing at least one species of

high-viscosity solvent having a viscosity of 10 to 200 mPa's at 20°C, said charge-transporting substance or charge-transporting organic material being dissolved or uniformly dispersed in said solvent, said charge-transporting monomer and oligomer has conjugated units being at least one species selected from substituted or unsubstituted and di- to tetra-valent aniline, thiophene, dithiin, furan, pyrrole, ethynylene, vinylene, phenylene, naphthalene, anthracene, imidazole, oxazole, oxadiazole, quinoline, quinoxaline, silole, silicon, pyridine, pyrimidine, pyrazine, phenylenevinylene, fluorene, carbazole, triarylamine, metal-containing or metal-free phthalocyanine, and metal-containing or metal-free porphyrin, said conjugated units being homogeneous and continuously arranged or being heterogeneous and randomly arranged.

The charge-transporting substance may be a charge-transporting monomer having conjugated units or a charge-transporting oligomer with a number-average molecular weight of 200 to 5000 having conjugated units, said conjugated units being homogeneous and continuously arranged or being heterogeneous and randomly arranged.



The conjugated unit can be at least one species selected from substituted or unsubstituted and di- to tetra-valent aniline, thiophene, dithiin, furan, pyrrole, ethynylene, vinylene, phenylene, naphthalene, anthracene, imidazole, oxazole, oxadiazole, quinoline, quinoxaline, silole, silicone, pyridine, pyrimidine, pyrazine, phenylenevinylene, fluorene, carbazole, triarylamine, metal-containing or metal-free phthalocyanine, and metal-containing or metal-free porphyrin.

The charge-transporting substance may be an oligoaniline derivative represented by the formula (1) or a quinonediimine derivative which is an oxidized form of an oligoaniline derivative represented by the formula (1).

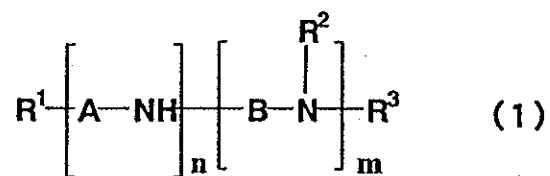

(where R^1 , R^2 , and R^3 independently denote hydrogen, hydroxyl group, halogen group, amino group, silanol group, thiol group, carboxyl group, sulfonic acid group, phosphoric acid group, phosphate ester group, ester group, thioester group, amide group, nitro group, monovalent hydrocarbon group, organoxy


group, organoamino group, organosilyl group, organothio group, acyl group, or sulfone group, and A and B independently denote a divalent group represented by the formula (2) or (3) below.

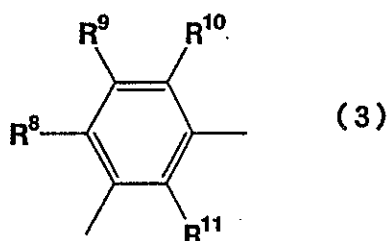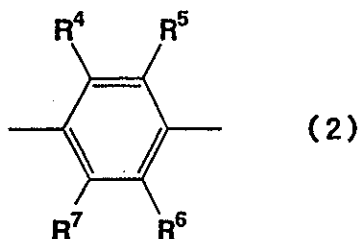

5

(where R^4 to R^{11} independently denote hydrogen, hydroxyl group, halogen group, amino group, silanol group, thiol group, carboxyl group, sulfonic acid group, phosphoric acid group, phosphate ester group, ester group, thioester group, amide group, nitro group, monovalent hydrocarbon group, organoxy group, organoamino group, organosilyl group, organothio group, acyl group, or sulfone group, and m and n independently denote an integer of 1 and above, such that $m+n \leq 20$.)


15 The charge-transporting substance may be a 1,4-dithiin derivative represented by the formula (4).

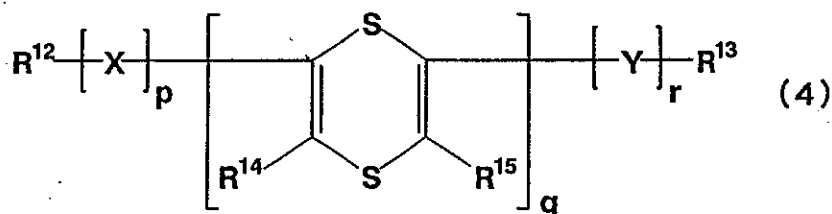

(where R^{12} , R^{13} , R^{14} , and R^{15} independently denote hydrogen, hydroxyl group, halogen group, amino group, silanol group, thiol group, carboxyl group, sulfonic acid group, phosphoric

20

acid group, phosphate ester group, ester group, thioester group, amide group, nitro group, monovalent hydrocarbon group, organoxy group, organoamino group, organosilyl group, organothio group, acyl group, or sulfone group; X and Y each denote at least one species selected from substituted or unsubstituted, di- to tetra-valent aniline, thiophene, furan, pyrrole, ethynylene, vinylene, phenylene, naphthalene, anthracene, imidazole, oxazole, oxadiazole, quinoline, quinoxaline, silole, silicon, pyridine, pyrimidine, pyrazine, phenylenevinylene, fluorene, carbazole, triarylamine, metal-containing or metal-free phthalocyanine, and metal-containing or metal-free porphyrin; the dithiin ring may be dithiinoxide ring or dithiindioxide ring; and p, q, and r independently denote 0 or an integer of 1 and above, such that $p + q + r \leq 20$). The electron accepting dopant substance may be a sulfonic acid derivative represented by the formula (5).

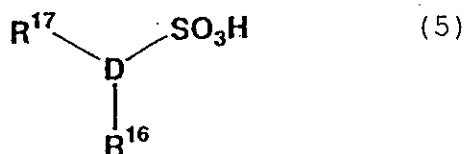

(where D denotes a benzene ring, naphthalene ring, anthracene ring, phenanthrene ring, or heterocyclic ring; and R^{16} and R^{17} independently denote a carboxyl group or hydroxyl group.)

In a second aspect, there is provided a charge transporting thin film which is made from the charge transporting varnish as defined in any of the paragraphs above.

In a third aspect, there is provided an organic electroluminescent element which has the charge transporting thin film as defined above.

In the organic electroluminescent element as defined above, the charge transporting thin film can be a hole injection layer or a hole transporting layer.

In a fourth aspect, there is provided a solar cell which is made with the charge transporting varnish as defined in any of the paragraphs above.

The charge-transporting varnish can have an adequate viscosity even when it is made from a low-molecular-weight charge transporting substance. Therefore, it is adaptable to various coating methods and baking methods. Moreover, it gives rise to a charge transporting thin film which is flat and highly uniform. The charge-transporting varnish may be made into a charge-transporting thin film as a hole injection layer for an organic EL element. The thus obtained hole injection layer may contribute to reduced drive voltage, improved luminous efficiency, and extended life.

BEST MODE FOR CARRYING OUT THE INVENTION

The invention will be described below in more detail.

The charge-transporting varnish according to the present invention comprises a charge-transporting substance composed of a charge-transporting monomer or a charge-transporting oligomer or polymer having a number-average molecular weight of 200 to 500,000, or a charge-transporting organic material composed of the above-mentioned charge-transporting substance and an electron accepting dopant substance or hole accepting dopant substance, and a solvent containing at least one species of high-viscosity solvent having a viscosity of 10 to 200 mPa·s at 20°C, the charge-transporting substance or charge-transporting organic material being dissolved or uniformly dispersed in the solvent.

Here, the term "charge-transporting" is synonymous with "electrically conductive", and it implies any of hole-transporting, electron-transporting, and hole- and electron-transporting. The charge-transporting varnish according to the present invention may be the one which exhibits charge-transporting property by itself; it may also be the one which gives rise to a solid film which exhibits charge transporting property.

The charge-transporting substance according to the present invention is not specifically restricted so long as

it is a charge-transporting monomer or a charge-transporting oligomer or polymer which is soluble or uniformly dispersible in a solvent. It should preferably be a charge-transporting monomer having conjugated units or a charge-transporting
5 oligomer with a number-average molecular weight of 200 to 5000 having conjugated units, the conjugated units being homogeneous and continuously arranged or being heterogeneous and randomly arranged.

The conjugated units are not specifically restricted
10 so long as they are atoms, aromatic rings, or conjugated groups capable of transporting charges. Considering high solubility in organic solvents and good charge-transporting performance, they should preferably be substituted or unsubstituted and di- to tetra-valent aniline, thiophene,
15 dithiin, furan, pyrrole, ethynylene, vinylene, phenylene, naphthalene, anthracene, imidazole, oxazole, oxadiazole, quinoline, quinoxaline, silole, silicon, pyridine, pyrimidine, pyrazine, phenylenevinylene, fluorene, carbazole, triarylamine, metal-containing or metal-free phthalocyanine,
20 and metal-containing or metal-free porphyrin. Incidentally, the conjugated units may join together to form a conjugated chain which may contain cyclic parts.

The substituent groups in the conjugated unit may be independently hydrogen, hydroxyl group, halogen group, amino
25 group, silanol group, thiol group, carboxyl group, sulfonic acid group, phosphoric acid group, phosphate ester group, ester group, thioester group, amide group, nitro group, monovalent hydrocarbon group, organoxy group, organoamino group, organosilyl group, organothio group, acyl group, or
30 sulfone group. These functional groups may have any arbitrary functional groups.

In this case, the monovalent hydrocarbon group may be exemplified by alkyl groups (such as methyl group, ethyl
group, propyl group, butyl group, t-butyl group, hexyl group,
35 octyl group, and decyl group), cycloalkyl groups (such as cyclopentyl group and cyclohexyl group), bicycloalkyl groups (such as bicyclohexyl group), alkenyl groups (such as vinyl

group, 1-propenyl group, 2-propenyl group, isopropenyl group, 1-methyl-2-propenyl group, 1-, 2-, or 3-butenyl group, and hexenyl group), aryl groups (such as phenyl group, xylyl group, tolyl group, biphenyl group, and naphthyl group), and
5 aralkyl groups (such as benzyl group, phenylethyl group, and phenylcyclohexyl group). The monovalent hydrocarbon group may have its hydrogen atoms substituted partly or entirely by halogen atoms, hydroxyl groups, and/or alkoxyl group.

The organoxy group is exemplified by alkoxy group,
10 alkenyloxy group, and aryloxy group. They are based on the same alkyl group, alkenyl group, and aryl group as mentioned above.

The organoamino group is exemplified by alkylamino groups (such as methylamino group, ethylamino group,
15 propylamino group, butylamino group, pentylamino group, hexylamino group, heptylamino group, octylamino group, nonylamino group, decylamino group, and laurylamino group), dialkylamino groups (such as dimethylamino group, diethylamino group, dipropylamino group, dibutylamino group,
20 dipentylamino group, dihexylamino group, diheptylamino group, dioctylamino group, dinonylamino group, and didecylamino group), cyclohexylamino group, and morpholino group.

The organosilyl group is exemplified by trimethylsilyl group, triethylsilyl group, tripropylsilyl group,
25 tributylsilyl group, tripentylsilyl group, trihexylsilyl group, pentyldimethylsilyl group, hexyldimethylsilyl group, octyldimethylsilyl group, and decyldimethylsilyl group.

The organothio group is exemplified by alkylthio groups such as methylthio group, ethylthio group, propylthio
30 group, butylthio group, pentylthio group, hexylthio group, heptylthio group, octylthio group, nonylthio group, decylthio group, and laurylthio group.

The acyl group is exemplified by formyl group, acetyl group, propionyl group, butyl group, isobutyl group,
35 vareryl group, isovareyl group, and benzoyl group.

The above-mentioned monovalent hydrocarbon groups, organoxy groups, organoamino groups,

organosilyl groups, organothio groups, and acyl groups are not specifically restricted in the number of carbon atoms. Their carbon number is usually 1 to 20, preferably 1 to 8.


The desirable substituent groups are fluorine,
5 sulfonic acid group, substituted or unsubstituted organoxy group, alkyl group, and organosilyl group. These substituent groups should preferably be absent for better charge-transporting performance.

According to the present invention, the
10 charge-transporting substance composed of charge-transporting oligomer or polymer should have a number-average molecular weight of 200 to 500,000. Under the lower limit, it will be poor in charge-transporting performance due to excessive volatility. Over the upper limit, it will be unusable due to
15 excessively low solubility in solvents.



Its number-average molecular weight should preferably be no higher than 5000, more preferably no higher than 2000 from the standpoint of its good solubility in solvents. For charge-transporting substances having a number-average
20 molecular weight of 5000 to 500,000, it is desirable to use at least one species of highly dissolving solvents (mentioned later) in order to raise their solubility. The highly dissolving solvents may be properly selected according to the charge-transporting substance to be used. The oligomer or
25 polymer should preferably be one which has no molecular weight distribution from the standpoint of good solubility and uniform charge-transporting performance.

Incidentally, the number-average molecular weight is measured by gel permeation chromatography (in terms of
30 polystyrene).

The charge-transporting substance should preferably be an oligoaniline derivative represented by the formula (1) or a quinonediimine derivative in its oxidized form, which has high solubility, good charge-transporting performance, and
35 adequate ionization potential. The oligoaniline derivative should preferably undergo reduction with hydrazine.

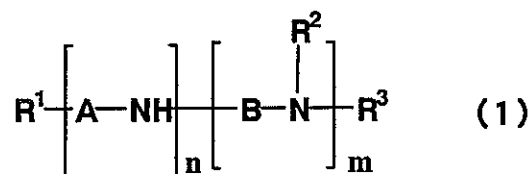

(where R^1 , R^2 , and R^3 independently denote hydrogen, hydroxyl group, halogen group, amino group, silanol group, thiol group, carboxyl group, sulfonic acid group, phosphoric acid group, phosphate ester group, ester group, thioester group, amide group, nitro group, monovalent hydrocarbon group, organoxy group, organoamino group, organosilyl group, organothio group, acyl group, or sulfone group, and A and B independently denote a divalent group represented by the formula (2) or (3) below.

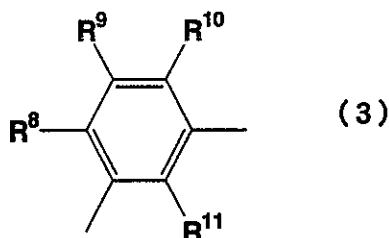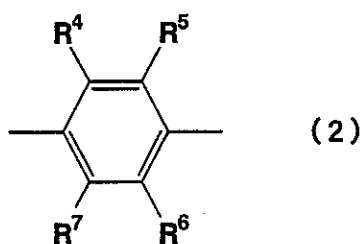

(where R^4 to R^{11} independently denote hydrogen, hydroxyl group, halogen group, amino group, silanol group, thiol group, carboxyl group, sulfonic acid group, phosphoric acid group, phosphate ester group, ester group, thioester group, amide group, nitro group, monovalent hydrocarbon group, organoxy group, organoamino group, organosilyl group, organothio group, acyl group, or sulfone group, and m and n independently denote an integer of 1 and above, such that $m+n \leq 20$.)


The substituent groups represented by R^1 to R^{11} may be the same ones as those in the conjugated units mentioned

above. These substituent groups may have any other arbitrary substituent groups.

The oligoaniline derivative is exemplified by phenyl tetraaniline, pentaphenyl aniline, tetraaniline (aniline tetramer), octaaniline (aniline octamer), hexadecaaniline (aniline hexadecamer), (phenyltolylanilino)triphenylamine, (phenyltrianilino)triphenylamine, (phenyltrianilino)diphenyloctylamine, hexadeca-o-phenetidine (o-phenetidine hexadecamer), aminotetraaniline, phenyltetraanilinesulfonic acid (having 1 to 4 sulfonic acid groups), and (butylphenyl)tetraaniline. They are all soluble in organic solvents.

Incidentally, these oligoaniline derivatives may be synthesized by any process which is not specifically restricted. Typical processes are disclosed in Bulletin of Chemical Society of Japan, 1994, vol. 67, pp. 1749-1752, and Synthetic Metals, US, 1997, vol. 84, pp. 119-120.

Another adequate charge-transporting substance is a 1,4-dithiin derivative represented by the formula (4).

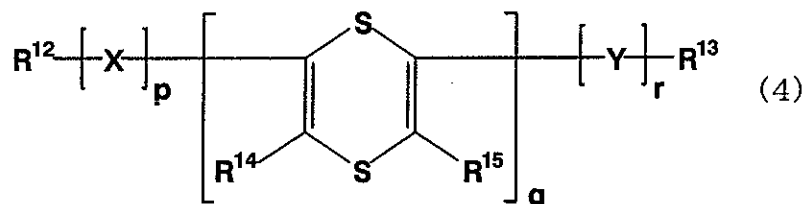

20

(where R^{12} , R^{13} , R^{14} , and R^{15} independently denote hydrogen, hydroxyl group, halogen group, amino group, silanol group, thiol group, carboxyl group, sulfonic acid group, phosphoric acid group, phosphate ester group, ester group, thioester group, amide group, nitro group, monovalent hydrocarbon group, organoxy group, organoamino group, organosilyl group, organothio group, acyl group, or sulfone group; X and Y each denote at least one species selected from substituted or unsubstituted, di- to tetra-valent aniline, thiophene, furan, pyrrole, ethynylene, vinylene, phenylene, naphthalene, anthracene, imidazole, oxazole, oxadiazole, quinoline, quinoxaline, silole, silicon, pyridine, pyrimidine, pyrazine,

25

30

phenylenevinylene, fluorene, carbazole, triarylamine, metal-containing or metal-free phthalocyanine, and metal-containing or metal-free porphyrin; the dithiin ring may be dithiinoxide ring or dithiindioxide ring; and p, q, and r independently denote 0 or an integer of 1 and above, such
5 that $p+q+r \leq 20$.)

The substituent groups represented by R^{12} to R^{15} may be the same ones as those in the conjugated units mentioned above. These substituent groups may have any other arbitrary
10 substituent groups. X and Y are the same units as the conjugated units mentioned above. These conjugated units may also have the above-mentioned substituent groups.

The dithiin derivative mentioned above is exemplified by 2,6-bis(2,2'-bithiophenyl)-1,4-dithiin, 2,6-bis(2,2'-
15 terthiophenyl)-1,4-dithiin, 2,6-bis(2,2'-biphenyl)-1,4-dithiin, 2,6-bis(2,2'-binaphthyl)-1,4-dithiin, and 2,6-bis(2,2'-bifuryl)-1,4-dithiin. Additional examples include oligothiophene derivatives such as α -ethylthienyl and 2,2':5',2"-terthiophene-5,5"-dialdehyde (which are soluble in
20 organic solvents).

Incidentally, these oligothiophene derivatives may be synthesized by any process which is not specifically restricted. Typical processes are disclosed in Heterocycles, 1987, vol. 26, pp. 939-942, and Heterocycles, 1987, vol. 26,
25 pp. 1793-1796.

Other suitable charge-transporting substances are exemplified by charge-transporting oligomers such as oligovinylene derivatives (which include β -carotene, lycopene, canthaxanthine, xanthophyll, astaxanthine, and bixin) and
30 charge-transporting monomers such as metal-containing and metal-free phthalocyanine (which include copper(II) 2,3,9,10,16,17,23,24-octakis(octhyroxy)-29H,31H-phthalocyanine, zinc(II) 2,3,8,10,16,17,23,24-octakis(octhyroxy)-29H,31H-phthalocyanine, nickel(II)
35 2,3,9,10,16,17,23,24-octakis(octhyroxy)-29H,31H-

phthalocyanine, and 1,4,8,11,15,18,22,25-octabutoxy-29H,31H-phthalocyanine).

The charge-transporting vanish according to the present invention may be prepared from the
5 charge-transporting substance alone or from a charge-transporting organic material which is composed of the charge-transporting substance and a charge-accepting dopant substance.

Here, the charge-accepting dopant substance is an
10 electron accepting dopant substance for the hole transporting substance or a hole accepting dopant substance for the electron transporting substance. Both should have a high charge-accepting capacity. The charge-transporting substance is not specifically restricted in solubility so long as it is
15 soluble in at least one kind of solvent used for the vanish.


The electron accepting dopant substance is exemplified by inorganic strong acids, such as hydrogen chloride, sulfuric acid, nitric acid, and phosphoric acid; Lewis acids, such as aluminum (III) chloride (AlCl_3), titanium (IV)
20 tetrachloride (TiCl_4), boron trichloride (BCl_3), boron trifluoride-ether complex ($\text{BF}_3 \cdot \text{OEt}_2$), iron (III) chloride (FeCl_3), copper (II) chloride (CuCl_2), antimony (V) pentachloride (SbCl_5), arsenic (V) pentafluoride (AsF_5), phosphorus pentafluoride (PF_5), and
25 tris(4-bromophenyl)aluminum hexachloroantimonite (TBPAH); organic strong acids, such as benzenesulfonic acid, tosylic acid, camphasulfonic acid, hydroxybenzenesulfonic acid, 5-sulfosalicylic acid, dodecylbenzenesulfonic acid, and polystyrenesulfonic acid, and organic or inorganic oxidants,
30 such as 7,7,8,8-tetracyanoquinodimethane (TCNQ), 2,3-dichloro-5,6-dicyano-1,4-benzoquinone (DDQ), and iodine. These examples are not limitative.

The hole accepting dopant substance is exemplified by alkali metals, such as Li, Na, K, and Cs, and metal complexes,
35 such as lithium quinolinolate (Liq) and lithium acetylacetonate ($\text{Li}(\text{acac})$). These examples are not limitative.

According to the present invention, both the charge-transporting substance and the charge-accepting dopant substance should preferably be amorphous solid. If either of them is required to be crystalline solid, it should desirably be a material which exhibits amorphous solid properties when a film is formed from the varnish composed of the charge-transporting substance, the charge-accepting dopant substance, and the solvent containing a high-viscosity solvent (which will be mentioned later).

Particularly in the case where at least either of the charge-transporting substance or charge-accepting dopant substance is crystalline solid, it should desirably be a substance which exhibits random intermolecular mutual actions. In the case where the charge accepting dopant is a low-molecular-weight compound, it should desirably be a compound which has three or more different polar functional groups in the same molecule.

These compounds are not specifically restricted; they include, for example, Tiron, dihydroxybenzenesulfonic acid, and sulfonic acid derivatives represented by the formula (5). The last one is most desirable. A typical example of the sulfonic acid derivatives is a sulfosalicylic acid derivative, such as 5-sulfosalicylic acid.

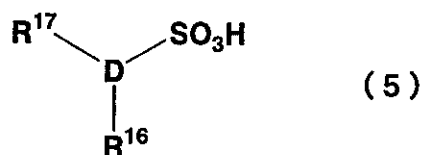

(where D denotes a benzene ring, naphthalene ring, anthracene ring, phenanthrene ring, or heterocyclic ring; and R^{16} and R^{17} independently denote a carboxyl group or hydroxyl group.)

The charge-transporting varnish according to the present invention is prepared with a solvent which contains at least one species of high-viscosity organic solvent having a viscosity of 10 to 200 mPa·s at 20°C and a boiling point of 50 to 300°C at normal pressure. This solvent should preferably be an organic solvent having a viscosity of 50 to

150 mPa·s at 20°C and a boiling point of 150 to 250°C at normal pressure. Moreover, this high-viscosity solvent should preferably be neutral so that it does not affect the oxidizing and reducing actions of the charge-transporting substance and the charge-accepting dopant substance. The value of viscosity is obtained by measurement with an E-type viscometer (ELD-50, made by Tokyo Keiki).

They are exemplified by cyclohexanol, ethyleneglycol, ethyleneglycol diglycidyl ether, 1,3-octyleneglycol, diethyleneglycol, dipropyleneglycol, triethyleneglycol, tripropyleneglycol, 1,3-butanediol, 1,4-butanediol, propyleneglycol, and hexyleneglycol. They are not limitative. Of these examples, cyclohexanol and dipropyleneglycol are preferable because of their adequate viscosity and boiling point and good coating performance on the substrate.

According to the present invention, the high-viscosity solvent in the charge-transporting varnish should be used in such an amount that it accounts for 10 to 100 wt%, preferably 30 to 90 wt%, more preferably 50 to 80 wt%, in the total amount of the solvent in the varnish. The ratio of the high-viscosity solvent should be 50 to 80 wt% so long as no solids separate out.

The charge-transporting varnish may contain a solvent which readily dissolves the charge transporting substance and the charge accepting dopant substance. This high-solvency solvent permits the charge-transporting substance to dissolve or uniform disperse in the varnish despite its low viscosity. The mixing ratio of the high-viscosity solvent to the high-solvency solvent is not specifically restricted. It is usually from 99:1 to 10:90, preferably from 90:10 to 30:70, and more preferably from 80:20 to 50:50 (by mass).

The high-solvency solvent is exemplified by water, methanol, N,N-dimethylformamide, N,N-dimethylacetamide, N-methylpyrrolidone, N-methylformanilide, N,N'-dimethylimidazolidinone, dimethylsulfoxide, chloroform, toluene, and methanol. They are not limitative.

The charge-transporting varnish may optionally contain a solvent which improves the varnish in wettability on the substrate, adjusts the surface tension, polarity, and boiling point of the solvent, and makes the film flat at the time of baking. The ratio of the optional solvent to the total amount of solvents in the varnish is 1 to 90 wt%, preferably 1 to 50 wt%.

The optional solvent may be exemplified by butyl cellosolve, diethyleneglycol diethyl ether, dipropyleneglycol monomethyl ether, ethyl carbitol, diacetone alcohol, γ -butyrolactone, and ethyl lactate. They are not limitative.

Incidentally, the charge-transporting varnish according to the present invention may vary in viscosity ranging from 1 to 60 mPa·s depending on the composition and ratio of solvents.

According to the present invention, the charge-transporting thin film is prepared from the charge-transporting varnish mentioned above. It is suitable for use as the hole injection layer (hole transporting layer) or the electron injection layer (electron transporting layer) of an organic EL element.

The thin film may be formed by applying the charge-transporting varnish onto a substrate, which is followed by solvent evaporation. The method for varnish application is not specifically restricted; it includes dipping, spin coating, transfer printing, roll coating, ink-jet, spraying, and brushing, which are capable of uniform film formation.

The method for solvent evaporation is not specifically restricted; it includes heating with a hot plate or oven under an adequate atmosphere, such as air, inert gas (nitrogen), and vacuum. The baking temperature is not specifically restricted so long as it is high enough for solvent evaporation; it is usually 40 to 250°C. For better film uniformity or for reaction on the substrate, baking may be accomplished in two or more stages at different temperatures.

The thickness of the charge-transporting thin film is not specifically restricted. It should preferably be 5 to 200 nm if it is used as the charge injection layer in an organic EL element. The film thickness may be adjusted by
5 changing the solid content in the varnish or by changing the amount of the solution applied onto the substrate.

The charge-transporting varnish (or the charge-transporting thin film prepared therefrom) according to the present invention may be used to form the OLED element
10 in the following manner, which is not limitative.

The first step starts with cleaning the substrate (as the electrode) with detergent, alcohol, or pure water. The anode substrate should preferably undergo surface treatment (such as ozone treatment and oxygen-plasma treatment)
15 immediately before use. However, this surface treatment may be omitted if the anode substrate is composed mainly of organic materials.

In the case where the hole transporting varnish is used for the OLED element, the thin film may be formed in the
20 following manner.

The hole transporting varnish is applied to the anode substrate by the above-mentioned coating method in order to form the hole transporting thin film on the electrode. The coated electrode is placed in a vacuum deposition chamber so
25 that it is coated sequentially with hole transporting layer, emitting layer, electron transporting layer, electron injection layer, and cathode metal layer by vacuum deposition. In this way the desired OLED element is obtained. Incidentally, a carrier block layer may be formed between any
30 adjacent layers in order to control the emitting region.

The anode is a transparent electrode represented one formed from indium tin oxide (ITO) or indium zinc oxide (IZO). It should preferably be planarized after deposition. These materials may be replaced by a polythiophene derivative or
35 polyaniline which exhibits high charge-transporting performance.

The hole transporting layer may be formed from any of the following materials. Triarylamines, such as (triphenylamine)dimer derivative (TPD), (α -naphthyl)diphenylamine dimer (α -NPD), and
5 [(triphenylamine)dimer]spirodimer (Sprio-TAD); starburst amines, such as 4,4',4''-tris[3-methylphenyl(phenyl)amino]triphenylamine (m-MTDATA), and 4,4',4''-tris(1-naphthyl(phenyl)amino)triphenylamine
10 (1-TNATA); and oligothiophenes, such as 5,5''-bis-{4-[bis(4-methylphenyl)amino]}phenyl-2,2':5',2''-terthiophene (BMA-3T).

The emitting layer may be formed from any of tris(8-quinolinolate)aluminum (III) (Alq_3),
15 bis(8-quinolinolate)zinc (II) (Znq_2), bis(2-methyl-8-quinolinolate)(p-phenylphenolate)aluminum (III) (BALq), and 4,4'-bis(2,2-diphenylvinyl)biphenyl (DPVBi). The emitting layer may also be formed by co-deposition with the electron-transporting material or hole-transporting
20 material and the emitting dopant.

The electron-transporting material includes Alq_3 , BALq , DPVBi, (2-(4-biphenyl)-5-(4-t-butylphenyl)-1,3,4-oxadiazole) (PBD), triazole derivative (TAZ), bathocuproin, and silole derivatives.

25 The emitting dopant includes quinacridone, rubrene, coumarin 540, 4-(dicyanomethylene)-2-methyl-6-(p-dimethylaminostyryl)-4H-pyran (DCM), tris(2-phenylpyridine)iridium (III) ($\text{Ir}(\text{ppy})_3$), and (1,10-phenanthroline)-tris(4,4,4-trifluoro-1-(2-thienyl)-butane-1,3-dionate)europium (III)
30 ($\text{Eu}(\text{TTA})_3\text{phen}$).

The carrier block layer may be formed from any of PBD, TAZ, and BCP.

The electron injection layer may be formed from any of lithium oxide (Li_2O), magnesium oxide (MgO), alumina (Al_2O_3),
35 lithium fluoride (LiF), magnesium fluoride (MgF_2), strontium fluoride (SrF_2), Liq , $\text{Li}(\text{acac})$, lithium acetate, and lithium benzoate.

The cathode may be formed from any of aluminum, magnesium-silver alloy, aluminum-lithium alloy, lithium, sodium, potassium, and cesium.

For application to the OLED element, the
5 electron-transporting varnish may be formed into thin film in the following manner.

The cathode substrate is coated with the electron-transporting varnish in order to form the electron-transporting thin film. The coated substrate is
10 placed in a vacuum deposition chamber so that it is coated sequentially with electron transporting layer, emitting layer, hole transporting layer, hole injection layer, and anode metal layer by sputtering from the above-mentioned materials. In this way the desired OLED element is obtained.

15 The charge-transporting varnish according to the present invention may be used to prepare the PLED element by any process which is not specifically restricted. A typical process is given below.

The process involves formation of an emitting
20 charge-transporting polymeric layer in place of the hole transporting layer, emitting layer, electron transporting layer, and electron injection layer, which are formed by vacuum deposition for the OLED element. The resulting PLED element contains the charge-transporting thin film formed
25 from the charge-transporting varnish of the present invention.

To be concrete, the process for preparing the PLED element consists of forming the hole transporting thin film on the anode substrate (in the same way as in the case of OLED element) from the hole transporting varnish, forming
30 thereon the emitting charge-transporting polymeric layer, and further depositing thereon the cathode electrode. In this way the desired PLED element is obtained.

An alternative process consists of forming the electron transporting thin film on the cathode substrate (in
35 the same way as in the case of OLED element) from the electron transporting varnish, forming thereon the emitting charge-transporting polymeric layer, and forming the anode

electrode by sputtering, vapor deposition or spin coating. In this way the desired PLED element is obtained.

5 The cathode and anode may be formed from the same material as used for the OLED element. They should undergo cleaning and surface treatment in the same way as mentioned above.

The emitting charge-transporting polymeric layer may be formed in the following way. The emitting charge-transporting polymeric material (with or without the
10 emitting dopant) is dissolved or uniformly dispersed in a solvent. The resulting solution is applied to the electrode substrate on which the hole injection layer has been formed. The solvent is removed by evaporation.

The emitting charge-transporting polymeric material
15 includes the following. Polyfluorene derivatives, such as poly(9,9-dialkylfluorene) (PDAF); polyphenylenevinylene derivatives, such as poly(2-methoxy-5-(2'-ethylhexoxy)-1,4-phenylenevinylene) (MEH-PPV); polythiophene derivatives, such as poly(3-alkylthiophene) (PAT); and polyvinylcarbazole
20 (PVCz).

The solvent includes toluene, xylene, chloroform, and the like. Dissolution or uniform dispersion may be accomplished by stirring, stirring with heating, or ultrasonic dispersion.

25 The coating method is not specifically restricted; it includes dipping, spin coating, transfer printing, roll coating, ink-jet, spraying, and brushing. Coating should preferably be carried out in an inert gas atmosphere, such as nitrogen and argon.

30 Solvent removal may be accomplished by heating with a hot plate or oven under an inert gas atmosphere or vacuum.

EXAMPLE

The invention will be explained in more detail with
35 reference to the following examples, which are not intended to restrict the scope thereof.

Physical data in Examples and Comparative Examples were measured in the following manner.

Viscosity: measured with an E-type viscometer (ELD-50),
made by Tokyo Keiki Co., Ltd.

- 5 Film thickness: measured with a surface profiler (DEKTAK3ST),
made by Nippon Shinkuu Gijutsu Co., Ltd.

Surface roughness: measured with an atomic force microscope
(AFM), "Nanoscope" (trademark) IIIa,
made by Japan Veeco Co., Ltd.

- 10 Current: measured with a digital multimeter 7555,
made by Yokogawa Denki Co., Ltd.

Voltage was generated by using a DC voltage current source
R6145, made by Advantest Co., Ltd.

- Luminance: measured with a luminance meter, BM-8,
15 made by Topcon Co., Ltd.

Ionization potential: measured with a photoelectron
spectrometer, AC-2, made by Riken Keiki Co., Ltd.

Example 1

- 20 Phenyltetraaniline (PTA) was prepared as follows
according to the process mentioned in Bulletin of Chemical
Society of Japan, 1994, vol. 67, pp. 1749-1752.

- In 2 liters of toluene was dissolved 12.977 g of
p-phenylenediamine. The resulting solution was given 245.05
25 g of tetra-n-butoxytitanium (as a dehydration-condensation
agent), which was dissolved at 70°C for 30 minutes. With
53.346 of p-hydroxydiphenylamine added, reaction was carried
out at 100°C for 24 hours under a nitrogen stream. After
reaction was complete, the reaction mixture was filtered and
30 remaining solids were washed sequentially with toluene and
ether. After drying, slivery crystals were obtained. One
part by weight of the crystals was placed in 25 parts by
weight of dioxane together with 0.2 equivalent of hydrazine
hydrate. With the atmosphere in the reaction system replaced
35 with nitrogen, the crystals were dissolved by refluxing.

To the resulting solution was added toluene (in an
amount of 25 parts by weight for 1 part by weight of the

crystals) so that the suspended solution was prepared. After refluxing the suspended solution, 10 parts by weight of dioxane was further added, and the crystals in the suspension was dissolved by further refluxing. The resulting solution
5 was filtered while hot. The filtrate was allowed to cool for precipitation of solids. The resulting solids were recrystallized, and the resulting crystals were washed sequentially with toluene-dioxane mixture (1:1) and ether under a nitrogen atmosphere. The thus obtained crystals were
10 dried at 60°C for 10 hours under reduced pressure. _____ Recrystallization was repeated in the same way as above to give 39.60 g of white crystals (in a 75% yields).

The thus obtained PTA in an amount of 1.000 g (2.260 mmol) was given 2.298 g (9.039 mmol) of 5-sulfosalicylic acid
15 dihydrate (5-SSA for short hereinafter) and 17.50 g of N,N-dimethylacetamide (DMAc) under a nitrogen atmosphere. The resulting solution was stirred with 52.50 g of cyclohexanol (c-HexOH, with a viscosity of 68 mPa·s at 20°C) as a high-viscosity solvent, in order to prepare a varnish
20 (containing 4.2 wt% solids). Table 1 shows the appearance, viscosity, and film-forming conditions of the varnish.

The varnish was applied by spin coating to an ITO glass substrate which had been cleaned with ozone for 40 minutes. Coating was followed by baking at 180°C for 2 hours
25 under the air to give a uniform thin film. The resulting thin film has the film thickness, conductivity, and surface roughness as shown in Table 2.

A hole-transporting thin film was formed on an ITO glass substrate from the above-mentioned varnish in the same
30 way as above. The coated substrate was placed in a vacuum deposition chamber, and it was coated sequentially with α -NPD (40 nm thick), Alq₃ (60 nm thick), LiF (0.5 nm thick), and Al (100 nm thick). Deposition was carried out at a pressure below 8×10^{-4} Pa. The rate of deposition (except for LiF) was
35 adjusted to 0.3 to 0.4 nm/s. The rate of deposition for LiF was adjusted to 0.02 to 0.04 nm/s. Transfer from one stage of deposition to another was carried out in a vacuum. The

resulting OLED element has the characteristic properties as shown in Table 3.

Comparative Example 1

5 PTA was prepared by synthesis and purification in the same way as in Example 1, and 1.000 g (2.260 mmol) of PTA, together with 2.298 g (9.039 mmol) of 5-SSA, were dissolved in 70 g of N,N-dimethylformamide (DMF) under a nitrogen atmosphere to give a varnish. The resulting varnish was
10 applied to an ITO glass substrate in the same way as in Example 1 to form a thin film thereon.

Table 1 shows the appearance, viscosity, and film-forming conditions of the varnish. Table 2 shows the thickness and surface roughness of the thin film.

15 It is noted from Table 1 that the varnish in Comparative Example 1 is less viscous than that in Example 1. It is also noted that the thin film formed from the varnish in Comparative Example 1 has a rougher surface than that formed from the varnish in Example 1.

20

Comparative Example 2

PTA was prepared by synthesis and purification in the same way as in Example 1, and 1.000 g (2.260 mmol) of PTA, together with 2.298 g (9.039 mmol) of 5-SSA, were dissolved
25 in 70 g of DMAc under a nitrogen atmosphere to give a varnish. Table 1 shows the appearance, viscosity, and film-forming conditions of the varnish.

It is noted from Table 1 that the varnish in Comparative Example 2 is less viscous than that in Example 1.

30

Comparative Example 3

An ITO glass substrate was treated in the same way as in Example 1. The treated ITO substrate was placed in a vacuum deposition chamber, and it was coated sequentially
35 with α -NPD, Alq₃, LiF, and Al in the same way as in Example 1. Table 2 shows the surface roughness of the treated ITO glass

substrate. Table 3 shows the characteristic properties of the OLED element.

It is noted from Table 2 that the ITO glass substrate without the thin film of the varnish of the present invention has a considerable surface roughness. It is noted from Table 3 that the OLED element in Comparative Example 3 is inferior to that in Example 1 in voltage, luminance, and current efficiency at a current density of 10 mA/cm². It is also noted from Table 3 that the OLED element in Comparative Example 3 is inferior to that in Example 1 in current density, luminance, and current efficiency at a voltage of 7.0 V.

Comparative Example 4

An ITO glass substrate was treated in the same way as in Example 1. The treated ITO substrate was coated by spin coating with an aqueous solution of polyethylene dioxythiophene-polystyrene sulfonic acid. Coating was followed by baking at 120°C for 1 hour under the air to give a uniform thin film. Table 2 shows the thickness, conductivity, and surface roughness of the thin film.

It is noted from Table 2 that the thin film in Comparative Example 4 has a lower conductivity and a rougher surface than that prepared from the varnish in Example 1.

The ITO glass substrate was coated with a hole-transporting thin film in the same way as in Example 1, and an OLED element was prepared in the same way as in Example 1. Table 3 shows the characteristic properties of the OLED element.

It is noted from Table 3 that the OLED element in Comparative Example 4 is inferior to that in Example 1 in voltage, luminance, and current efficiency at a current density of 10 mA/cm². It is also noted from Table 3 that the OLED element in Comparative Example 4 is inferior to that in Example 1 in current density, luminance, and current efficiency at a voltage of 7.0 V.

Example 2

Four kinds of varnishes were prepared as follows from PTA (which had been synthesized and purified by the process mentioned in Example 1) and 5-SSA in the same way as in
5 Example 1 (with their molar ratio remaining unchanged at 1:4 and the solids content remaining unchanged at 4.2 wt%), except that the solvent composition and ratio were changed.

That is, PTA and 5-SSA were dissolved in DMAc under a nitrogen atmosphere. The resulting solution was incorporated
10 with c-HexOH, or dipropyleneglycol (DPG for short hereinafter), or DPG plus BC (as the high-viscosity solvent). All of the resulting varnishes were complete solutions free of solids precipitation.

Table 1 shows the appearance, viscosity, and
15 film-forming conditions of the varnish. It is noted from Table 1 that the viscosity of the varnish ranges from 1.4 to 58 mPa·s depending on the solvent composition and mixing ratio.

The thus obtained varnishes were used to prepare OLED
20 elements in the same way as in Example 1. The resulting OLED elements have the same characteristic properties as that in Example 1.

Example 3

25 One of the varnishes in Example 2, which was dissolved in a mixed solvent of DPG-DMAc-BC (6:3:1), was formed into a thin film by off-set printing method under the condition shown in Table 1. An OLED element with this thin film was prepared. Table 3 shows the characteristic properties of the
30 resulting OLED.

Example 4


Aniline hexadecamer (Anil16) was prepared as follows according to the process mentioned in Synthetic Metals, 1997,
35 vol. 84, pp. 119-120. In 35.00 g of N,N-dimethylacetamide (DMAc) were dissolved 1.000 g of Anil16, together with 2.786 g of 5-sulfosalicylic acid under a nitrogen atmosphere. The

resulting solution was stirred with 105.00 g of cyclohexanol (c-HexOH), as a high-viscosity solvent, having a viscosity of 68 mPa·s at 20°C, to give a varnish (which contains 2.36 wt% solids).

Table 1 shows the appearance, viscosity, and film-forming conditions of the varnish. Table 3 shows the characteristic properties of the OLED element prepared with the varnish in the same way as in Example 1.

Example 5

2,6-bis(2,2'-bithiophenyl)-1,4-dithiin (BBD for short hereinafter) represented by the formula below was synthesized as follows according to the process mentioned in Heterocycles, 1997, vol. 26, pp. 939-942.



In 97.87 g of N,N-dimethylacetamide (DMAc) was dissolved 1.000 g of BBD, together with 1.142 g of 5-sulfosalicylic acid, under the air. The resulting solution was stirred with 48.94 g of cyclohexanol as a high-viscosity solvent to give a varnish (which contains 1.2 wt% solids).

Table 1 shows the appearance, viscosity, and film-forming conditions of the varnish. Table 3 shows the characteristic properties of the OLED element prepared with the varnish in the same way as in Example 1.

Example 6

A mixture of 1.000 g of BBD (obtained in Example 5) and 1.142 g of 5-SSA was dissolved in 17.50 g of DMAc with stirring at 60°C for 10 minutes under the air. The resulting solution was stirred with 52.50 g of cyclohexanol to give a varnish containing 2.8 wt% solids. The thus obtained varnish gave no precipitation when cooled to room temperature. Table 1 shows the appearance, viscosity, and film-forming conditions of the varnish. The varnish gave a flawless

uniform thin film when processed in the same way as in Example 1. The resulting thin film was found to have an ionization potential value of 5.5 eV.

5 Comparative Example 5

 A mixture of 1.000 g of BBD (obtained in Example 5) and 2.285 g of 5-SSA was dissolved in 140 g of DMF with stirring at room temperature under the air to prepare a varnish containing 1.4 wt% solids. Table 1 shows the appearance, viscosity, and film-forming conditions of the varnish. The varnish did not give a uniform thin film when processed in the same way as in Example 1. The resulting thin film has radial irregularities that occur at the time of spin coating.

15

Example 7

 A mixture of PTA (obtained in Example 1) and 5-SSA in different ratios was dissolved in any of solvents listed in Table 4 to give five kinds of varnishes. The resulting varnishes were complete solutions free of precipitation. Table 4 shows the amount of PTA and 5-SSA and the solids content, viscosity, and film-forming conditions of each varnish.

 Table 5 shows the characteristic properties of the OLED element prepared with the varnish in the same way as in Example 1. It also shows the characteristic properties of the PLED element prepared in the following manner.

Preparation of PLED Element

30 The varnish mentioned above was applied to the ITO glass substrate in the same way as mentioned in Example 1. The varnish film was further coated by spin coating with a toluene solution of MEH-PPV (with a solids content of 10 g/L) under a nitrogen atmosphere. The coating process was followed by baking at 110°C for 20 minutes to give an emitting layer (80 nm thick). The coated substrate was placed in a vapor deposition chamber, and it was coated

sequentially with Ca (20 nm thick) and Al (100 nm thick) by deposition to give the desired PLED element.

Table 1

	Solvent	Appearance	Viscosity of Varnish (mPa·s)	Film Forming Conditions
Example 1	c-HexOH-DMAC (3:1)	Green, clear solution	12	180° C, 2 h
Comparative Example 1	DMF	Light green, clear solution	1.4	180° C, 2 h
Comparative Example 2	DMAC	Light green, clear solution	1.6	180° C, 2 h
Example 2 (1)	c-HexOH-DMAC (5:1)	Green, clear solution	15	180° C, 2 h
Example 2 (2)	c-HexOH-DMAC (9:1)	Green, clear solution	21	180° C, 2 h
Example 2 (3)	DPG-DMAC (9:1)	Green, clear solution	58	180° C, 2 h
Example 2 (4)	DPG-DMAC-BC (6:3:1)	Green, clear solution	16	80° C, 5 min to 180° C, 2 h
Example 4	c-HexOH-DMAC (3:1)	Dark green, clear solution	12	180° C, 2 h
Example 5	c-HexOH-DMAC (1:2)	Reddish orange, clear solution	3.5	180° C, 30 min
Example 6	c-HexOH-DMAC (3:1)	Reddish orange, clear solution	12	180° C, 30 min
Comparative Example 5	DMF	Reddish orange, clear solution	1.4	180° C, 30 min

5

Table 2

	Film Thickness (nm)	Conductivity (S/cm) at 100 mA/cm ²	Surface Roughness		
			Standard Deviation Rms (nm)	Average Roughness Ra (nm)	Maximum Height Rmax (nm)
Example 1	21	--	0.16	0.56	0.72
Example 1	66	--	0.09	0.31	0.45
Example 1	58	3.5×10 ⁻⁷	--	--	--
Comparative Example 1	15	--	0.53	2.76	3.08
Comparative Example 3	150	--	3.31	4.29	72.43
Comparative Example 4	82	--	0.43	2.23	1.69
Comparative Example 4	63	1.5×10 ⁻⁷	--	--	--

Table 3

	Film Thickness (nm)	Current Density (mA/cm ²)	Voltage (V)	Luminance (cd/m ²)	Current Efficiency (cd/A)	Threshold Voltage for Emission (V)	Maximum Luminance (cd/m ²)	Ionization Potential (eV)
Example 1	21	10	8.1	410	4.1	2.75	18799	5.4
	21	2.86	7.0	101	3.5	2.75	18799	5.4
Example 3	25	10	8.2	395	4.0	2.75	19680	5.4
	25	2.75	7.0	96	3.5	2.75	19680	5.4
Example 4	28	10	7.5	310	3.1	2.75	11730	5.5
	18	5.69	7.0	169	3.0	2.75	11730	5.5
Example 5	10	10	7.3	709	3.3	2.75	18270	5.5
	10	9.38	7.0	309	3.3	2.75	18270	5.5
Comparative Example 3	--	10	9.2	330	3.3	4.50	10640	5.1
	--	0.37	7.0	1.2	0.3	4.50	10640	5.1
Comparative Example 4	42	10	6.9	230	2.3	2.75	5610	5.6
	42	11.4	7.0	253	2.2	2.75	5610	5.6

Table 4

	Amount of PTA (g)	Amount of SSA (g)	Solids Concentration (wt%)	Viscosity (mPa·s)	Film Forming Conditions
Example 7 (1)	1.000	1.149	2.8	12	180° C, 2 h
Example 7 (2)	1.000	2.298	4.2	12	180° C, 2 h
Example 7 (3)	1.000	4.596	6.6	12	180° C, 2 h
Example 7 (4)	1.000	6.900	5.0	12	180° C, 2 h
Example 7 (5)	1.000	9.200	7.0	12	180° C, 2 h

Table 5

	Film Thickness (nm)	Current Density (mA/cm ²)	Voltage (V)	Luminance (cd/m ²)	Current Efficiency (cd/A)	Threshold Voltage for Emission (V)	Maximum Luminance (cd/m ²)	Ionization Potential (eV)
Example 7 (1) OLED	59	11.6	7.0	433	3.7	2.75	17970	5.3
	59	10	6.9	365	3.7	2.75	17970	5.3
Example 7 (1) PLED	50	114	7.0	465	0.41	2.5	2620	5.3
	50	500	9.5	2150	0.43	2.5	2620	5.3
Example 7 (2) PLED	50	203	7.0	920	0.45	2.5	2980	5.4
	50	500	9.0	2000	0.40	2.5	2980	5.4
Example 7 (3) OLED	50	0.61	7.0	13	2.0	3.0	4570	5.4
	50	10	10.9	245	2.5	3.0	4570	5.4
Example 7 (3) PLED	50	352	7.0	2280	0.64	2.5	3000	5.4
	50	500	7.5	2850	0.57	2.5	3000	5.4
Example 7 (4) OLED	50	0.78	7.0	16	2.1	3.0	3400	5.5
	50	10	10.5	258	2.6	3.0	3400	5.5
Example 7 (4) PLED	50	662	7.0	3330	0.50	2.5	2810	5.6
	50	500	6.5	2850	0.57	2.5	2810	5.6
Example 7 (5) PLED	50	42	7.0	1626	0.39	2.5	1910	5.6
	50	500	7.5	1600	0.32	2.5	1910	5.6

It has been mentioned above that the

5 charge-transporting varnish according to the present invention provides a charge-transporting thin film which is flat and highly uniform. The charge-transporting thin film formed on the electrode surface makes the electrode surface flat and homogenous, thereby preventing electric shortage.

10 The varnish has a viscosity which readily changes according as the ratio of solvents changes. The varnish is also variable in baking temperature and applicable to various coating processes depending on the kind of solvents added.

In other words, the charge-transporting varnish of the present invention can be made into a charge-transporting thin film by a simple inexpensive wet process, such as printing, ink-jet, and spraying. The charge-transporting thin film is
5 used as the charge injection layer for the organic EL elements. The resulting organic EL element can be driven at a low voltage owing to reduction in injection barrier between the electrode and the organic layer. The flat electrode surface and the flat interface between the
10 charge-transporting thin film and the organic layer contribute to the luminous efficiency and to life of the organic EL element. Unlike the conventional charge-transporting varnish of aqueous solution type, the charge-transporting varnish of the present invention is in
15 the form of solution in organic solvents, and hence it prevents entrance of moisture detrimental to the element. The procedure according to the present invention makes it possible to apply conjugated oligomers poor in sublimability and heat resistance to the organic EL elements. According to
20 the present invention, the charge-transporting substance can be easily doped with a charge-accepting dopant substance. The ratio of the charge-accepting dopant may be adequately changed to modify the ionization potential of the thin film and the characteristic properties of the organic EL element.
25 Owing to its high flatness and good processability, the charge-transporting varnish will be applied to capacitor electrode protecting film, antistatic film, and solar cells.


CLAIMS:

1. A charge-transporting varnish which comprises a charge-transporting substance composed of a charge-transporting monomer or a charge-transporting oligomer having a number-average molecular weight of 200 to 5,000, or polymer having a number-average molecular weight of 200 to 500,000, or a charge-transporting organic material composed of said charge-transporting substance and an electron accepting dopant substance or hole accepting dopant substance, and a solvent containing at least one species of high-viscosity solvent having a viscosity of 10 to 200 mPa.s at 20°C, said charge-transporting substance or charge-transporting organic material being dissolved or uniformly dispersed in said solvent, said charge-transporting monomer and oligomer has conjugated units being at least one species selected from substituted or unsubstituted and di- to tetra-valent aniline, thiophene, dithiin, furan, pyrrole, ethynylene, vinylene, phenylene, naphthalene, anthracene, imidazole, oxazole, oxadiazole, quinoline, quinoxaline, silole, silicon, pyridine, pyrimidine, poyrazine, phenylenevinylene, fluorene, carbazole, triarylamine, metal-containing or metal-free phthalocyanine, and metal-containing or metal-free porphyrin, said conjugated units being homogeneous and continuously arranged or being heterogeneous and randomly arranged.



2. A charge-transporting varnish as defined in claim 1, wherein said high-viscosity solvent has a viscosity of 50 to 150 mPa's at 20°C.

3. A charge-transporting varnish as defined in claim 1, wherein said

4. A charge-transporting varnish as defined in any of claims 1 to 3, wherein said charge-transporting substance is an oligoaniline derivative represented by the formula (1) or a quinonediimine derivative which is an oxidized form of an oligoaniline derivative represented by the formula (1).

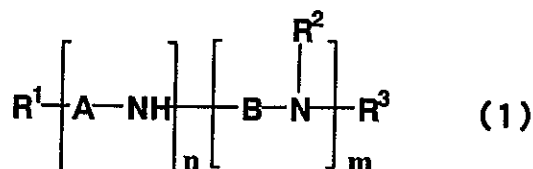


- (where R^1 , R^2 , and R^3 independently denote hydrogen, hydroxyl group, halogen group, amino group, silanol group, thiol group, carboxyl group, sulfonic acid group, phosphoric acid group, phosphate ester group, ester group, thioester group, amide group, nitro group, monovalent hydrocarbon group, organoxy group, organoamino group, organosilyl group, organothio group, acyl group, or sulfone group, and A and B independently denote a divalent group represented by the formula (2) or (3) below.

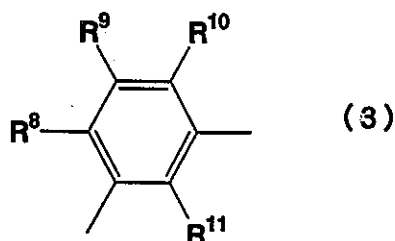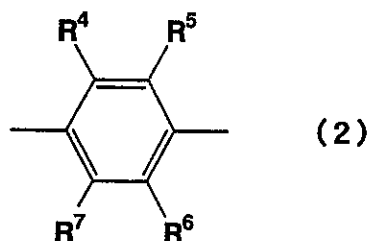

- (where R^4 to R^{11} independently denote hydrogen, hydroxyl group, halogen group, amino group, silanol group, thiol group, carboxyl group, sulfonic acid group, phosphoric acid group, phosphate ester group, ester group, thioester group, amide group, nitro group, monovalent hydrocarbon group, organoxy


group, organoamino group, organosilyl group, organothio group, acyl group, or sulfone group, and m and n independently denote an integer of 1 and above, such that $m+n \leq 20$.)

- 5 5. A charge-transporting varnish as defined in claim 1, wherein said charge-transporting substance is a 1,4-dithiin derivative represented by the formula (4).

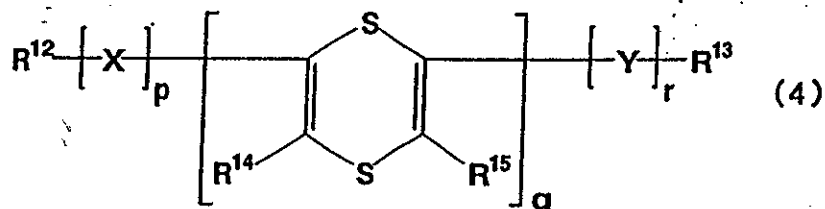

- (where R^{12} , R^{13} , R^{14} , and R^{15} independently denote hydrogen, hydroxyl group, halogen group, amino group, silanol group, thiol group, carboxyl group, sulfonic acid group, phosphoric acid group, phosphate ester group, ester group, thioester group, amide group, nitro group, monovalent hydrocarbon group, organoxy group, organoamino group, organosilyl group, organothio group, acyl group, or sulfone group; X and Y each denote at least one species selected from substituted or unsubstituted, di- to tetra-valent aniline, thiophene, furan, pyrrole, ethynylene, vinylene, phenylene, naphthalene, anthracene, imidazole, oxazole, oxadiazole, quinoline, quinoxaline, silole, silicon, pyridine, pyrimidine, pyrazine, phenylenevinylene, fluorene, carbazole, triarylamine, metal-containing or metal-free phthalocyanine, and metal-containing or metal-free porphyrin; the dithiin ring may be dithiinoxide ring or dithiindioxide ring; and p, q, and r independently denote 0 or an integer of 1 and above, such that $p+q+r \leq 20$.)

6. A charge-transporting varnish as defined in claim 1, which further comprises at least one species of High-solvency solvent.
7. A charge-transporting varnish as defined in Claim 6, wherein a mixing ratio of the high-viscosity solvent to the high-solvency solvent is from 99:1 to 50:50 by mass.
8. A charge-transporting varnish as defined in claim 6, wherein the high-solvency solvent is one or more solvent selected from the group consisting of N,N-dimethylformamide, N,N-dimethylacetamide, N-methylpyrrolidone, N-methylformanilide, N,N'-dimethylimidazolidinone and dimethylsulfoxide.
9. A charge-transporting varnish as defined in claim 1, wherein the high-viscosity solvent is one or more solvent selected from the group consisting of cyclohexanol, ethyleneglycol, ethyleneglycol diglycidyl ether, 1,3-octyleneglycol, diethyleneglycol, dipropyleneglycol, triethyleneglycol, tripropyleneglycol, 1,3-butanediol, 1,4-butanediol, propyleneglycol and hexyleneglycol.
10. A charge-transporting varnish as defined in any of claims 1 to 9, wherein said electron accepting dopant substance is a sulfonic acid derivative represented by the formula (5).

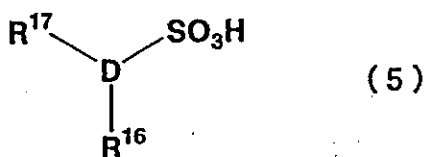

(where D denotes a benzene ring, naphthalene ring, anthracene ring, phenanthrene ring, or heterocyclic ring; and R¹⁶ and R¹⁷ independently denote a carboxyl group or hydroxyl group.)

11. A charge transporting thin film which is made from the charge transporting varnish defined in any of claims 1 to 10.

12. An organic electroluminescent element which has the charge transporting thin film defined in claim 11.

13. An organic electroluminescent element as defined in claim 12, wherein said charge transporting thin film is a hole injection layer or a hole transporting layer.

114. A solar cell which has the charge transporting thin film defined in claim 11.