

(19) World Intellectual Property Organization

International Bureau

WIPO

(43) International publication date

14 December 2000 (14.12.2000)

PCT

(10) International publication number

WO 00/75453 A1

(51) International patent classification⁷:

E01D 19/16

E04C 5/12,

(74) Representatives: LOISEL, Bertrand etc.; Cabinet Plasseraud, 84, rue d'Amsterdam, F-75440 Paris Cedex 09 (FR).

(21) International application number:

PCT/FR00/01479

(22) International filing date:

30 May 2000 (30.05.2000)

(25) Language of filing:

French

(26) Language of publication:

French

(30) Data relating to the priority:

99/07,016 3 June 1999 (03.06.1999)

FR

(71) Applicant (for all designated States except US):

FREYSSINET INTERNATIONAL (STUP) [FR/FR]; 1 bis, rue du petit Clamart, F-78140 Vélizy Cedex (FR).

(72) Inventors; and

(75) Inventors/Applicants (US only): FUZIER, Jean-Philippe

[FR/FR]; 103, rue du Four à Chaux, F-78630 Orgeval (FR).

STUBLER, Jérôme [FR/FR]; 4, rue Leconte de Lisle, F-75016

Paris (FR).

(81) Designated states (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated states (regional): ARIPO Patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:


With the International Search Report.

For an explanation of the two-letter codes and the other abbreviations, reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT Gazette.

As printed

(54) Title: DEVICE FOR ANCHORING A STRUCTURAL CABLE

(54) Titre: DISPOSITIF D'ANCRAGE D'UN CABLE DE STRUCTURE

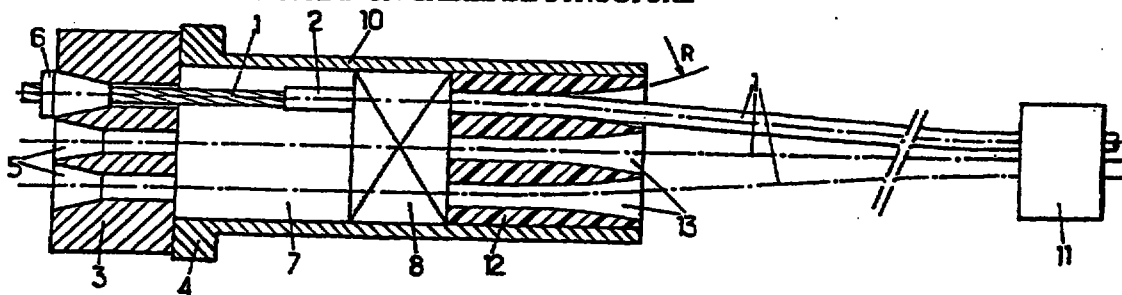

(57) Abstract: The device comprises an anchoring block (3) which is pierced by openings (5) which respectively receive a conductor (1) of a cable and a means (6) for locking said cable, a bearing part (4) for the anchoring block, and means (12) for guiding conductors duct (13) for each cable conductor, allowing for angular deviation. Each guide duct widens out in the direction of the common part of the cable. The guide ducts have a transversal distribution in the direction of the anchoring block whereby said distribution is aligned with the distribution of the openings.

(57) Abrégé: Le dispositif comprend un bloc d'ancrage (3) traversé par des orifices (5) recevant chacun un brin (1) du câble et un moyen (6) de blocage dudit brin, une pièce d'appui (4) pour le bloc d'ancrage, et des moyens (12) de guidage des brins entre le bloc d'ancrage et une partie courante du câble, reliés à la pièce d'appui et comportant pour chaque brin du câble un conduit de guidage individuel (13) autorisant une déviation angulaire. Chaque conduit de guidage s'évase en direction de la partie courante du câble. Les conduits de guidage présentent en direction du bloc d'ancrage une répartition transversale alignée avec celle des orifices du bloc d'ancrage.

WO 00/75453 A1