

RTMP copy

THIS SHEET HAS BEEN
REPLACED

- 1 -

Variable Day Start Tablet DispenserField of the Invention

5 This invention relates to a substantially circular
tablet dispenser component system which may be adapted for
a variable day start of a prescribed periodic tablet
regimen. Also provided are a tablet dispenser kit, a
tablet package adapted for filling the tablet dispenser
system, methods of filling the tablet dispenser of the
10 invention and methods of administering a prescribed
regimen of medication using the tablet dispenser system of
the invention.

Background of the Invention

15 Medicaments and other pharmaceutical preparations are
often prescribed for patients on a time related or
scheduled dispensing basis. Examples of tablets or pills
that are prescribed in a set periodic regimen include
tablets or pills adapted for oral ingestion that are used
20 for birth control, for regulating blood pressure, for
regulating blood lipids, as antibiotics and for treating
a variety of other ailments such as diabetes. Such
extended time periodic regimens are particularly adaptable
to preventative medicine (e.g. regulating blood pressure
25 or birth control) or for treatment of chronic ailments
which all require a relatively long course of therapy.

The amount of drug provided in a solid form
pharmaceutical preparation such as a tablet or pill is
30 inherently controlled so that each tablet contains a fixed
amount of dosage so that there is little or no confusion
as to the amount which should be taken. Variability in
pharmaceutical administration is often, if not invariably,
attributable to patient uncertainty, forgetfulness and/or
35 confusion as to whether or not a tablet has been taken at

This Sheet Has Been Replaced



- 2 -

the prescribed rate and time. This problem can be compounded when the dosage is to be repeated a number of times daily or when multiple medicaments are prescribed or when medicaments are to be taken over a long course of therapy which may extend from weeks to years. This problem may be applicable to most every type of patient including the elderly, the chronically ill (who may be in a weakened state), and the active person engaged in a long term course of treatment such as contraception or hormone replacement therapy.

As a result of problems of confusion, uncertainty or forgetfulness a patient may in reality take more or less than the prescribed rate of dosage that is indicated, thereby, inadvertently altering the prescribed course of treatment. To assure maximum effectiveness of medication prescribed it is desirable to provide a dispenser that will aid the patient in adhering to the prescribed time schedule for dosing whether that be once daily, multiple daily doses or less frequent doses.

Tablet dispensers and devices for dispensing solid form pharmaceutical preparations such as tablets or pills over a time related sequence are known. Examples of such a tablet dispenser is disclosed in U.S. Patent Number 4,165,709 which provides for a dispenser which allows a user to take a tablet on a prescribed basis, e.g. a daily basis, by providing an indicator that denotes the days of the week. The disclosure of this patent is hereby incorporated herein by reference. No provision is available in this device for enabling one to preset a specific day of the week in which the first designated pill in a differing series of pills is to be taken in a fashion that is simple and efficient. For example, if an indicator mechanism is not adjustable and is preset to

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

- 3 -

require that the first pill of a regimen made up of different pills is to be taken on a particular day of the week, such as Sunday, and a user is prescribed the medication on a Monday, the user will be at risk for a
5 period of time from Monday to the following Sunday. Producing seven different dispensers that will cover the start of each day of the week is a possible, albeit an impractical, solution to this problem.

10 Other patents such as U.S. Patent Nos. 4,915,256, 4,646,936 and 4,667,845 describe various pill dispensers which provide for a daily indicator which may designate the period when particular pills are to be taken and can
15 be preset to start the regimen on any day selected by the user. While such pill dispensers accomplish a desirable end of providing for any day start of a prescribed regimen with means for pills to be dispensed on a given day, such are not entirely practical for various reasons. These
20 devices may be either complicated to use or difficult to refill. For example, a counter clockwise rotation of a circular pill dispenser may be difficult to understand and unnatural for a user; a design requiring multiple steps which may be erroneously taken out of sequence could lead
25 to patient confusion or frustration and/or a noncompliant package, whereby a designated initial pill is not provided in the desired initial position in the dispenser.

It is therefore an object of the present invention to provide a unique design for dispensing tablets which is
30 simple and intuitive to use, readily refillable by the patient/consumer and relatively foolproof, i.e. assures compliance and avoids inadvertent mistakes. Further, the present invention is intended to provide a dispensing system which can provide a prescribed regimen of pills in
35 a consistent manner with a high degree of confidence while

This Sheet Has Been Replaced



- 4 -

also providing an any day start feature. Additional objects and advantages of the invention will be set forth, in part in the description which follows and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention are realized and obtained by means of the devices, combinations, and methods particularly pointed out in the appended claims.

10 Summary of the Invention

To achieve the objects and purposes of the invention, as embodied and fully described herein, the present invention provides a tablet dispenser component system comprising as a first component a rotatable substantially circular unidirectional knob having indicators of periodicity thereon. The rotatable knob is encircled with a notched skirt comprising a plurality of notches spaced substantially equally apart.

20 A second component comprises a substantially flat support having a single tablet dispensing aperture and a rising wall portion protruding therefrom to form an interior cup portion. A third component comprises a center axis means which is engaged and fixed onto the flat support. A first engagement means is provided whereby the rotatable knob is rotatably joined to the flat support. A second engagement means is provided comprising unidirectional ratchet means to form a functional system with the rotatable knob for unidirectionally rotating the rotatable knob in a circular fashion about the center axis means.

35 The rotatable knob and either the flat support or central axis means have unidirectional ratchet means comprising a plurality of ratchet stops corresponding to

This Sheet Has Been Replaced

- 5 -

a single space or notch on the notched skirt. In preferred embodiments the ratchet means comprises a ratchet track and spring pawls for positive engagement into the track to provide for each ratchet stop. The track and pawls may be located on the rotatable knob and fixed center axis or flat support. For example, the track may be located on the rotatable knob and the spring pawls located below the rotatable knob on the flat support or the track may be located on the center axis means and the spring pawls located on the rotatable knob.

The fourth component of the system comprises a separate and removable tablet package adapted to fit over the rotatable knob with means to positively engage the notched skirt such that the two components rotate in unison. The tablet package comprises a plurality of collapsible tablet pockets each containing a tablet arranged substantially circularly about the package. The spacing of the tablet pockets corresponds to each stop of the ratchet means whereby a new tablet is placed over the tablet dispensing aperture upon the positive engagement of each stop on the ratcheted rotatable knob. The tablet pockets are lidded with a frangible membrane which is interposed between the pockets and the single tablet dispensing aperture of the support. A tablet is dispensed from the package by collapsing the pocket which is in registry with the aperture thereby urging the tablet to fracture the membrane and pass through the aperture. The collapsible tablet pockets are formed to accommodate tablets of substantially circular, non-circular or caplet-like shape. In preferred embodiments the tablet package is fixed to a substantially rigid or stiff platform piece comprising a plurality of tablet apertures which correspond to the tablet pockets and one or more, preferably two, sprocket lugs on the interior thereof to positively fit in and engage the notched skirt.

This Sheet Has Been Replaced



- 6 -

In preferred embodiments of the tablet dispenser of the invention the substantially flat support and interior cup portion, formed by wall portions rising from the flat support base is provided with means for retaining the tablet package and for interlocking the tablet package in place upon engagement of a first stop of the unidirectional ratcheted and rotatable knob. The tablet package is removable from the support means upon completion of a full rotation of the ratcheted and rotatable knob. In a particularly preferred embodiment, the rotatable knob comprises a calendared ring which is unidirectionally rotatable about the fixed center axis in a clockwise direction wherein the notched skirt is attached to the rotatable ring portion thereof. The fixed center axis preferably has an indicator mark thereon aligned with the single tablet dispensing aperture of the flat support component.

In other preferred embodiments of the invention the tablet package has at least two complementary projections to positively engage at least two notches in the notched skirt when fitted over the rotatable knob. In preferred embodiments, the collapsible tablet pockets are formed to accommodate tablets of substantially circular, non-circular or caplet-like shape.

In a particularly preferred embodiment of the invention the substantially flat support is adapted with means for receiving, orienting and interlocking the tablet package by the provision of at least two, preferably three, inward extending ledges protruding from the rising wall portion therefrom. The shape and orientation of the ledges correspond to at least two, preferably three, complementary recesses on the tablet package, thus permitting reception of the tablet package onto the flat support in a single initial position of tablet orientation



- 7 -

about the flat support. A designated tablet is positioned above the tablet dispensing aperture at the initial tablet position and the tablet package is interlocked onto the base upon dispensing of the initial tablet followed by a
5 single advance of the calendared rotatable knob whereby the tablet package underlaps the ledges and is held in place thereby. The tablet package is therefore not disengageable or removable until a complete rotation of the knob returns the tablet package to the initial tablet
10 position.

In particularly preferred embodiments the inward extending ledges are spatially arrayed, preferably
15 asymmetrically, to inhibit the receipt of the package on the substantially flat support and the disengagement, discharge or removal of the tablet package from the substantially flat support at any position other than the initial tablet position. Further, the inward extending
20 ledges are preferably, arrayed, shaped or sized to receive or disengage with the complementary notched tablet package only at the initial tablet position.

In preferred embodiments of the system of the
25 invention the rotatable knob is marked with at least one set of the seven days of the week whereby each of the markings is oriented to a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support portion. A single
30 tablet corresponding to an indicated day of the week is fed over the single tablet dispensing aperture of the flat support portion upon each advance of the positively engaging stop of the calendared rotatable knob to the subsequent day of the week. The calendared rotatable knob
35 is preferably provided with days of the week in at least three sets of seven images on the rotatable knob. Any



THIS SHEET HAS BEEN REPLACED

- 8 -

setting of the calendared knob in relation to the indicator mark(s), thus, may constitute a predisposed start day setting for the package.

5 In preferred embodiments the tablet dispenser system comprises a lid or cover portion which fits over the support base to provide an enclosed compact package. Preferably, the lid and support include interlocking means for engaging the compact package in a closed position when
10 not in use.

 In other embodiments the invention is provided with medicament or a tablet dispenser kit for the administration of a particular medicinal regimen
15 comprising a tablet dispenser which is filled with the prescribed medicament in a preset prescribed orientation which complies with the periodic regimen of administration indicated. In particularly preferred embodiments, the medicament is an oral contraceptive or hormone replacement
20 therapy medicament provided in a prescribed regimen. In another kit embodiment, the tablet package is presented as a separate component from the dispensing container thereby calling attention to the refillability features of the system.

25 The present invention also provides for a method of administering a prescribed regimen of tablet medication comprising utilizing a tablet dispenser system of the invention whereby the tablets deployed therein and the
30 orientation of the days of the week to each tablet position is adapted to a prescribed regimen. Preferably, the prescribed regimen is for providing oral contraceptive or hormone replacement therapy.

35

This Sheet Has Been Replaced

- 9 -

The present invention also provides for a tablet package adapted for receipt and use in the tablet dispenser system of the invention which may be provided for refilling the tablet dispenser system.

5

Further, a method of filling or refilling the tablet dispenser system of the invention is provided which comprises the step of aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support of the tablet dispenser; and placing a tablet package onto the substantially flat support.

10

In other embodiments a method of filling the tablet dispenser system of the invention is provided comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position; aligning at least two complimentary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support; and placing the tablet package onto the substantially flat support.

15

20

25

In other embodiments, subsequent steps are provided for dispensing the initial tablet located at the initial tablet position and rotating the rotatable knob one stop to the next day to positively engage the tablet package in the tablet dispenser thereby inhibiting disengagement of the package until a full rotation of the rotatable knob has been completed. In another embodiment, the tablet package is anchored in the load position by a movable holding lug on the flat support of the tablet dispenser system.

30

35

This Sheet Has Been Replaced



- 10 -

In yet another embodiment, the tablet housing is bonded to the stiff platform by a plurality of posts attached to the platform, threaded through holes in the housing, and headed over in rivet fashion. The platform is designed to come apart upon removal of the tablet housing rendering it nonfunctional for reuse and separable for recycling.

In another embodiment of the invention a tablet dispenser component system is provided comprising:

a circular tablet package comprising a plurality of sequentially arranged collapsible tablet pockets each containing a tablet arranged substantially circularly about the package wherein the tablet package comprises at least two asymmetrically spaced notches about the outer periphery of the ringed circular package;

a base support comprising a single tablet dispenser aperture therein and at least two ledges which are shaped, sized, and oriented to receive the tablet package in only one position of positive engagement thereon whereby a designated tablet of the tablet package is provided over the single tablet dispensing aperture;

a means for rotating the circular tablet package about the base support around a center axis portion situated on the base support to orient tablets in the sequentially arranged tablet pockets of the tablet package over the tablet dispensing aperture; and

a means for positively engaging the tablet package onto the base support upon the initial dispensing of a tablet from the tablet package and rotation of the tablet package to move the next sequentially arranged tablet pocket over the tablet dispensing aperture.

In another embodiment of the invention a tablet dispenser system for dispensing a regimen of tablets in a designated sequence is provided comprising:



THIS SHEET HAS BEEN REPLACED

- 11 -

as a first element, a flat support having a single tablet dispensing aperture therein and an encircling wall portion erected thereto defining a cup-like interior;

5 as a second element, a pivot connected to the center of the flat support defining an axis;

as a third element, a rotatable knob having a top surface with indicators of periodicity marked thereon in correspondence with the tablets, a means for gripping thereby to apply rotary force, and a central bore sized
10 for encircling the pivot;

as a fourth element, a first connecting means for rotatably connecting the rotatable knob coaxially to the flat support;

as a fifth element, a means for intermittent
15 unidirectional advancement of the knob about the axis with registry corresponding to the aperture and the indicators of periodicity;

as a sixth element, a circular tablet package comprising a housing containing the tablets in a plurality
20 of frangibly lidded collapsible tablet pockets arranged circularly about the package at a radial distance corresponding to the distance of the aperture from the axis and having a central bore sized for encircling the rotatable knob;

25 as a seventh element, a means for orienting the tablet package to the flat support, whereby the first tablet is located over the aperture and misorientation of the tablet package to the flat support is inhibited; and

as an eighth element, a second connecting means for
30 connecting the tablet package to the rotatable knob upon loading onto the flat support for any initial setting of the knob such that rotary force applied to the knob is translated to the tablet package providing the manner in which the tablet package is advanced thereby causing each
35 tablet of the regimen to be presented in the designated order, accompanied with the corresponding indicator of

This Sheet Has Been Replaced



- 12 -

periodicity and registered by the intermittent unidirectional advancement means, to the aperture for the purpose of dispensing a single tablet at a time from the tablet dispenser by collapsing the collapsible tablet pocket positioned thereto and urging the tablet through the frangible lidding into and through the aperture.

The invention also provides a tablet package adapted for placement into the tablet dispenser system of the invention. In preferred embodiments the tablet package comprises a hole in its center and notches in its outer periphery which are shaped, sized or oriented to be placed upon a base support for the tablet package which support comprises a center knob and protruding ledges which are complementary to the hole and notches of the tablet package, respectively. Whereby, the tablet package is received onto the base support in only a single desired orientation providing a designated tablet of the tablet package over a single tablet dispensing aperture in the base support of the tablet dispenser system.

The invention also provides an intuitive tablet dispenser component kit for dispensing a regimen of solid dosage preparations in a designated sequence, comprising:

- as a first element, a container;
- as a second element, a refill carrier housing the solid dosage preparations in a circular array loaded into the container, the refill carrier presented separately upon introduction to emphasize a refillable feature;
- as a third element, a means for individually dispensing the solid dosage preparations from the refill carrier; and
- as a fourth element, a set of timing indicators, appropriate for the course of therapy and in correspondence with the solid dosage preparations in count



- 13 -

and layout, affixed to, and in registry with, the refill carrier.

Brief description of the drawings

5

Figures 1-5 and 6-13 illustrate two distinct embodiments of the present invention.

10

Figure 1 is a perspective view of a tablet dispenser incorporating the present invention with the notched skirt and tablet platform provided in a cut away view;

15

Figure 2 is a side view of the tablet dispenser in a closed position;

20

Figure 3 is a plan view of the cup like support portion of the dispenser with the tablet package provided in a cut away view;

25

Figure 4 is a cross-sectional view of Figure 4 with the tablet dispenser shown in a closed position;

30

Figure 5 is an exploded cross-sectional view of Figure 4 with a tablet dispenser provided as if in a closed position;

Figure 6 is a perspective view of a tablet dispenser incorporating the present invention in a closed position;

Figure 7 is a perspective view of the tablet dispenser in an open position with a tablet package (refill unit) positioned for loading;

35

Figure 8 is an exploded perspective view of the tablet dispenser and tablet package (refill unit);



THIS SHEET HAS BEEN
REPLACED

- 14 -

Figure 9 is a cross-sectional view taken along line 9-9 of Figure 6 with the tablet dispenser shown in a closed position;

5 Figures 10 and 11 show details of the ratchet mechanism of the tablet dispenser;

10 Figure 12 is a perspective view of the tablet package (refill unit) which is adapted for insertion into the pill dispenser of the invention with a cut away view of the blister ring to show the tablet package platform;

15 Figure 13 is a perspective view of a tablet package platform upon which a blister ring containing tablets may be mounted; and

 Figure 14 is a top plan view of the tablet package platform.

20

Detailed Description of the Preferred Embodiments

25 Reference will now be made in detail to preferred embodiments of the invention. Examples of two preferred embodiments are illustrated in the accompanying figures and described in detail below with reference to such figures and the numbers provided therein.

30 Referring now to Figures 1-6, a first preferred embodiment of the invention will be described in further detail. Figure 1 is a perspective view of a tablet dispenser 1 incorporating the tablet dispenser system of the present invention. The tablet dispenser 1 comprises as a first component, a substantially circular unidirectional rotatable knob 3 which is encircled with a notched skirt 9 comprising a plurality of notches 11
35 spaced substantially equally apart. The rotatable knob 3

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

- 15 -

comprises a flat surface 2 and a cylindrical wall 4. A portion of the cylindrical wall 4 may be provided with ridges 94 in a knurling pattern for enhancing hand gripping of the rotatable knob 3. The rotatable knob 3 is mounted onto a second component, which is base 5 comprising a substantially flat support 6, having a single tablet dispensing aperture 13, and a rising wall 8 extending from the periphery of the flat support 6.

10 The rotatable knob 3 is attached to the flat support by engagement means around a third component which is a fixed center axis means 7 about which said rotatable knob 3 may be rotated in a circular fashion. The fixed center axis means 7 has a flat top 14 and includes an optimal pointer shaped indicator 15 which aligns with an angular ledge 17, a current or initial tablet position 97 and a corresponding day of administration 12 imprinted on the flat surface 2 of the rotatable knob 3.

20 The tablet dispenser shown in Figure 1 comprises a fourth component which is a separate and removable tablet package 19 which is adapted to fit over the rotatable knob 3 with means to positively engage the notched skirt 9 thereof such that the two components rotate in unison. 25 The separate and removable tablet package 19 comprises a rigid platform 24 and an essentially flexible blister ring 26 upon which tablets 99 are provided in collapsible tablet pockets 21. The tablet package 19 comprises a plurality of collapsible tablet pockets 21 each containing 30 a tablet 99 arranged substantially circularly about the package whereby the spacing of the tablet pockets 21 correspond to each stop of the ratchet means, whereby a new tablet 99 is placed over the tablet dispenser aperture 13 upon the positive engagement of each stop on the 35 ratcheted rotatable knob 3. The tablet pockets 21 are

This Sheet Has Been Replaced



- 16 -

lidded with a frangible membrane 22 (best seen in Figure 4) which is sealed to the blister ring 26 and interposed between the tablets 99 in the tablet pockets 21 and a single tablet dispensing aperture 13. A substantially rigid or stiff platform 24 comprises a plurality of tablet apertures 23 which are substantially aligned with each tablet pocket 21. A tablet 99 is dispensed from the tablet dispenser 1 by collapsing the tablet pocket 21 which is in registry with the single tablet dispensing aperture 13 thereby forcing the tablet to fracture a frangible membrane 22 and pass through the apertures 23 and 13 (as seen in Figure 4). The rigid platform 24 and the flexible blister ring 26 are held together by bonding means (e.g. glue, ultrasonic welding or staking).

15

The base 5 has a rising wall 8 extending from the flat support 6 to form a cup like interior space in which the rotatable knob 3 and tablet package 19 are housed. The base 5 comprises at least two inwardly extending ledges 16 protruding from the rising wall portion 8 toward the center axis means 7. The shape and the orientation of the ledges 16 correspond to at least two complementary recesses 18 on the tablet package 19 permitting reception of the tablet package 19 onto the flat support 6, whereby a designated first tablet 97 is positioned above the tablet dispensing aperture 13 at the initial or current tablet position 98 which is indicated by an angular ledge 17. The angular ledge 17 may be cooperative with ledges 16 by corresponding to complementary recesses 20 and 18 of the tablet package 19 to provide reception of the tablet package 19 onto the flat support 6. The tablet package 19 is interlocked onto the base 5 upon a single advance of the calendared rotatable knob 3 whereby a portion of the rigid platform 24 underlaps the inwardly extending ledges 16 and 17. The tablet package is not disengageable or

35

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

- 17 -

removable until a complete rotation of the knob 3 returns the tablet package 19 to the initial tablet position 98. A finger lever 32 is provided, diametrically opposite the angular ledge 17, as is more fully discussed below in the description of Figure 3.

The tablet package further comprises a cover 101 which together with the base 5 protects the dispenser contents from impact damage and light degradation particularly where the base and cover material is of such density and opacity as to filter out degradative wavelengths of light and to protect the dispenser's contents from physical damage attendant to normal use. A latch strut 103 extends toward the base 5 from the cover 101. The latch strut 103 comprises an inward hook 131 and an outward lever 132. When the cover 101 is closed onto the base 5, the latch strut 103 passes through a latch seat aperture 133 into a cavity beneath latch seat 105 thereby snapping the inward hook 131 beneath the bottom surface of the latch seat 105 and abutting the outward lever 132 to the top surface of the latch seat. The latch seat 105 is connected to the base 5 by torsion arms 134 such that latch lever 135 overhangs the base. To open the dispenser, the latch lever 135 is urged upward thereby lifting the outward lever 132 while rotating the seat aperture 133 into disengagement from the inward hook 131 resulting in the cover springing ajar.

Figure 2 is a side view of a tablet dispenser 1 in a closed position upon which the cover 101 is closed upon the base 5 over the flat support 6.

Figure 3 is a plan view of the cup like support portion of the dispenser base 5 with the blister ring 26 provided in a cut away view showing many of the components described for Figure 1 above. A notch 20 in the tablet

This Sheet Has Been Replaced



- 18 -

package 19 at the current dispensing tablet position 97 permits the tablet package to be placed over the angular indicating ledge 17. The top of the rotatable knob 3 is marked with the seven days of the week repeated for four
5 weeks or 28 days of administration 12. Ratchet spring pawls 10 are shown by ghost lines on the edges of the rotatable knob 3. An optional day indicator 15 is positioned on top of fixed center axis 7 and points to the current day 12 at the current dispensing pill position 97
10 and aligns with the angular indicator 17.

The rotatable knob 3 has a notched skirt 9 and a flat top surface 2 connected by a cylindrical wall 4. The flat top surface 2 is imprinted with days of administration 12
15 of a number corresponding to the number of tablet pockets 21 and in such a way that the days align both with the tablets 99 disposed in the tablet pockets 21 and the ratchet positions (not shown). The tablet pockets 21 and tablets 99 disposed therein are sequenced such that they
20 advance clockwise continuously without interruption. The notched skirt 9 is edged with notches 11 of a number corresponding to the pill positions and similarly co-aligned with the ratchet system and the tablets 99. Sprocket lugs 110 of the tablet package 19 are shown in
25 engagement with notches 11 of the notched skirt 9. This engagement of sprocket lugs 110 causes the tablet package 19 to interlock and rotate in unison with the notched skirt 9 of the rotatable knob 3.

30 A holding lug 31 is appended to the rising wall portion 8 of the flat support 6 and overhangs the tablet package 19 when the tablet package is inserted onto the tablet dispenser 1 thereby adding a safety feature for the load position where ledges 16 and recesses 18 are in
35 bypass alignment. The rising wall portion 8 of the flat support 6 is provided with slots 34 to allow articulation

This Sheet Has Been Replaced



- 19 -

of the holding lug 31 when the tablet package 19 is pressed into location. The finger lever 32 is provided to ease the removal of the tablet package.

5 Figure 4 is a cut away view taken along line 4-4 of Figure 3 with a pill package shown in a closed position. A first pair of hinge struts 140 depend from the cover and interleave with a second pair of hinge struts 140 attached to the rising wall portion 8 to form a hinge between the
10 cover and base when pin 109 is threaded into four aligned holes 108 of the two pairs of hinge struts. The cover 101 performs the function, together with base 5, of protecting the dispenser contents from impact damage and light degradation, and each is shaped in a manner to cup roughly
15 one-half of the enclosed volume. The latching means comprising strut 103 and seat 105 are in an engaged and locked position.

 Figure 5 is an exploded cut away view taken along
20 line 4-4 of Figure 3 with a tablet dispenser provided as if in a closed position. A base insert 5b, which includes center axis portion 7, is snap fitted into base unit 5a by friction jackets 51 of the base unit 5a and friction posts 53 of the base insert unit 5b. The interior portions of
25 the notches 11 of the notched skirt 9 engage two or more protruding lugs 110 of the tablet package 19, upon such engagement the tablet package 19 moves as the rotatable knob 3 moves thus rotating the tablet package 19 and the tablets 99 contained therein along their circular pathway
30 around the dispenser and sequentially deploys an individual tablet 99 over the tablet dispensing aperture 13 upon each ratchet stop of the ratcheted rotatable knob 3. The base insert 5b also contains ratchet spring-pawls 10 circularly positioned and symmetrically arrayed around
35 the axis of symmetry and tangentially inclining upward from the plane of the floor, rising in a clockwise

This Sheet Has Been Replaced



- 20 -

direction. An elevated structure centered on the axis of symmetry provides a fixed center axis means 7 for rotatably connecting the rotatable knob 3 by three flexible retainer struts 87 which overhang a retaining ledge 88 on the inner diameter of the rotatable knob 3. The retainer struts 87 and ledges 88 allow bypass of the rotatable knob 3 during assembly and thereafter form a rotatable assemblage.

The bottom of the notched skirt 9 contains a circular ratchet track 81 with clockwise tending vertical ramps 83 of a number corresponding to the number of tablet pockets 21, aligned with the days 12, the tablets 99, and the base aperture 13. The clockwise tending vertical ramps 83 ride over, depress and engage the ratchet spring-pawls of the base providing discrete positioning of the tablets 99 over the base aperture 13 and in alignment with sequential days 12 while preventing counterclockwise backoff.

The tablet dispenser of the invention may be operated as follows, referring to FIGS. 1 and 3: To fill the tablet dispenser 1 with the tablet package 19, the user rotates the rotatable knob 3 to align the current or desired start or initial day of the week 112 with angular ledge 17 and pointer shaped indicator 15. The user then places the tablet package 19 onto the base 5 by aligning the complementary recesses 18 of the tablet package 19 with the extending ledges 16 of the base 5 and the angular ledge 17 with the complementary recess 20 and fitting the tablet package 19 over the base 5 and the holding lug 31. The tablet package 19 is pressed over the holding lug 31 and into the base 5 to insert the tablet package 19. The sprocket lugs 110 of the tablet package 19 are thereby oriented for engagement with the notched skirt 9 for rotatable operation. After dispensing the first tablet 99, the user rotates the rotatable knob 3 so that the



THIS SHEET HAS BEEN
REPLACED

- 21 -

specific mark 12, indicating the second day on which a tablet is to be taken, is in alignment with pointer 17 (this also aligns the tablet, corresponding with that particular day, in registry with the aperture 13 in flat support 6). When it is time to take the next tablet 99, the user presses downwardly on collapsible pocket 21 thereby urging the tablet 99 to fracture, frangible membrane 22 and pass through its corresponding tablet aperture 23 in the platform 24 and then through aperture 13 in the flat support 6 for collection thereafter. The ratchet track 81 in cooperation with the pawls 10, unseen to the user, controls the rotation so that each tablet passes incrementally over and in registration with the aperture. This procedure continues until the supply of tablets is exhausted, whereupon the user merely lifts out the empty tablet package and replaces it with a new tablet package containing a full supply of tablets thus refilling the tablet dispenser.

Referring now to the Figures 6-13, a second preferred embodiment of the invention will be described in detail.

Figure 6 shows the tablet dispenser 200 in a closed position whereby a cover 202 sits atop a flat support 201.

Figure 7 shows the tablet dispenser system comprising a tablet dispenser 200 and circular tablet package 205. The tablet dispenser comprises a flat support 201, a cover 202, and a rotatable knob 203 rotatably fixed onto the flat support by pivot 204 thereby providing an axis of rotation for the rotatable knob. The cover and base are connected at hinge 206. The recitation of the hinge structure is similar to that previously described. The circular tablet package 205 contains a regimen or kit of

This Sheet Has Been Replaced



- 22 -

tablets or pills 207 illustrated in a count of 28 (partially shown). Upon loading, the circular tablet package connects to the rotatable knob such that torque applied to the knob rotates each tablet 207 of the circular tablet package in turn over a tablet dispensing aperture 208 located in the flat support 201 thereby providing means for a selected tablet to be expressed from the tablet dispenser.

10 In the exploded view of Figure 8, the flat support 201 is bounded by an encircling wall portion 209 erected thereon. Attached to the flat support at the center is a cylindrical wall portion 210. The pivot 204 comprises a flat surface 211 mounted onto and overlapping a
15 cylindrical stalk 212 which provides a support means. The overlap defines a bottom surface 223, best illustrated in Figure 10, which forms the base for a circular ratchet track 224. The outside diameter of the stalk 212 is of such dimension as to cause a friction fit with the
20 interior surface 247 of the cylindrical wall portion 210 when assembled thereto. An orientation means for the pivot is provided by four radial vanes 213 extending inward from the cylindrical wall portion 210 which nest within four complementary slots 214 in the base of the
25 stalk 212 when assembled. The slots are provided with lead-in chamfers 215 to guide the slots into position when assembling. A fastening means is provided by circumscribing corrugations 216 on the stalk 212 and complementarily-placed inscribing corrugations 217 on the
30 interior surface 247, the sets of opposing corrugations interlocking when the pivot 204 is pressed into the cylindrical wall portion 210 causing the sets to bypass.

35 The flat support encircling wall portion 209 supports two rounded ledges 225 and a pointed ledge 226, all of which extend inwardly with clearance underneath. The

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

- 23 -

pointed ledge, positioned adjacent to the aperture 208, provides a means for indicating the position of the aperture during and after the loading of the circular tablet package 205. The encircling wall portion 209 also supports a holding lug 227 attached to a slotted portion (not shown) of the wall which snaps over the tablet package 205 during loading in order to retain it thereafter. The holding lug 227 has a ledge portion 228, best shown in Figure 9, serving the function of holding the tablet package in place on the flat support, and an inclined plane portion (not shown) providing a means for levering the structure aside during loading. The outside surface of the encircling wall portion 209 contains a latch recess 229, positioned at a point diametrically opposite the hinge 206, which works in cooperation with a latch lug 230 in the cover, best shown in Figure 9, to provide a latching means when the tablet dispenser is closed.

The rotatable knob 203 has a top surface 248 supported by an exterior cylindrical wall 249 and has a central bore 218. The central bore is of sufficient dimension to surround the pivot stalk 212 when the pivot flat top surface 211 is nested within recess 246 which is bounded by an interior cylindrical wall 219 extending downward from the inside diameter of the top surface 216. Extending inward from the bottom edge of the interior cylindrical wall, defining the floor of the recess 246, are four spring pawls 220. The spring pawls comprise four arcuately-arrayed spring arms 221 which terminate in four ratchet pawls 222 which, in turn, provide a cantilevered upward bias by the spring arms from base points lying on a common circle corresponding to the ratchet track 224 (see Figure 10). When the pivot 204 is seated in the cylindrical wall portion 210 of the flat support 201 passing through the central bore 218 of the rotatable knob

This Sheet Has Been Replaced



- 24 -

203, thereby providing connecting means with the flat support, the ratchet pawls 222 close with the ratchet track 224, thereby forming a means for intermittent unidirectional advancement of the rotatable knob. The
5 pawls and track have a rest position, as best shown in Figure 11, defining a ratchet stop. The sliding face 232 of the pawl provides for clockwise advancement of the rotatable knob 203 and the abutting face 223 limits counterclockwise motion. The number of ratchet stops
10 corresponds to the number of tablets 207 in the regimen. The ratchet stops are in fixed alignment with the flat support 201 and, in particular, with the dispensing aperture 208, by means of the radial vanes 213. The interposition of componentry is best shown in the cut-away
15 view of Figure 9.

A notched skirt 231 extends outward from the bottom edge of the exterior cylindrical wall 249. The notches also correspond to the number of tablets 207 of the tablet
20 package 205 and are in registry, linked by the spring pawls 220, with the stops on the ratchet track 224 (Figure 10) and, associatively, with the dispensing aperture 208. Indicators of periodicity 251, such as days of the week, are printed or engraved onto the top of the flat surface
25 248 of the rotatable knob 203, also in registry with the ratchet track stops. An indicator mark 233 is similarly printed or engraved onto the flat surface 211 of the pivot 204 in fixed registry with the dispensing aperture 208, providing, in cooperation with the indicators of
30 periodicity, a means for indicating by name (e.g. day of week) the ratchet position corresponding to the aperture. Knurls 234 are formed into the top outside edge of the rotatable knob 203 thereby providing a means for gripping when torque is applied to the knob by hand.

35

This Sheet Has Been Replaced



- 25 -

The circular tablet package 205 comprises a tablet housing 235 and a rigid skeletal structure 236. The tablet housing contains the tablets 207 between a layer of flexible material having collapsible tablet pockets 237, such as thermoformed PVC film, and a frangible lidding, such as aluminum foil, sealed underneath. The tablet housing 235 is shaped like a donut and is perforated with two pilot holes 238 adjacent the inside diameter. During assembly, the pilot holes are threaded over posts 239 attached to lugs 240 on the rigid skeletal structure 236. The posts are then headed over in rivet fashion thereby unitizing the rigid skeletal structure with the tablet housing 235 to form the complete tablet package 205. After use, the spent tablet housing can be stripped from the rigid skeletal structure for the purpose of recycling materials by pulling the tablet housing away from the rigid skeletal structure thus rupturing the connecting structure of the lugs 240 at the fragile necks 241, which are otherwise robust when remaining combined with the tablet housing 235. The rigid skeletal structure 236 has apertures 242 of a number corresponding to the number of tablets, and arrayed so as to fall beneath each of the collapsible tablet pockets 237 of the tablet housing 235 when oriented thereto by the pilot holes 238. A tablet 207 is dispensed by applying finger pressure to a collapsible tablet pocket thereby urging the tablet 207 through the frangible film and the supporting aperture.

The circular tablet package 205 is provided with two rounded cut-aways 243 and a pointed cut-away 244 complementary in size, shape, and layout, respectively, to the rounded ledges 225 and the pointed ledge 226 appended to the flat support 201. The pointed cut-away 244 corresponds to a designated first tablet of the regimen. The cut-aways 243 and 244, in cooperation with the ledges 225 and 226, permit loading of the circular tablet package

This Sheet Has Been Replaced



- 26 -

205 into the tablet dispenser 200 in only one initial orientation thereby furnishing a designated first tablet at the dispensing aperture 208 for initial dispensing. A connecting means is provided by the lugs 240 of the rigid skeletal structure 236 which are complementarily shaped to interlock with the notched skirt 231 of the rotatable knob 203. Upon advancement of the next tablet to the aperture 208 by rotation of the rotatable knob, the periphery rail 245 of the rigid skeletal structure 236 underpasses the ledges 225 and 226 by traversing the clearance underneath thereby locking the circular tablet package 205 within the tablet dispenser 200. Because the layout or geometry of the cut-aways and ledges permits a match at only the loading position, the locking arrangement is maintained until the advancement completes a circle back to the initial position. The circular tablet package 205 can then be removed, and the tablet dispenser 200 can be refilled with a fresh tablet load via a new tablet package.

20

Figure 12 is a perspective view of the tablet package (refill unit) which is adapted for insertion into the pill dispenser of the invention with a cut away view of the blister ring to show the tablet package platform.

25

Figures 13 and 14 are perspective views of a tablet package platform upon which a blister ring containing tablets may be mounted. The substantially circular platform comprises a rigid skeletal structure 236 having posts 239 on the inside diameter which are attached to lugs 240. The lugs 240 are connected to the rigid skeletal structure 236 by means of fragile necks 241. The rigid skeletal structure 236 has apertures 242 for passage of tablets and cutaways or notches 243 and 244 which are adapted to correspond to ledges in the tablet dispenser

35

This Sheet Has Been Replaced



- 27 -

for positive and correct placement of the tablet package into the tablet dispenser system.

5 While the material for the elements of the tablet dispenser are generally left to choice and compatibility with the functions of the dispenser, the rotatable knob, the center axis means, the support base, rigid platform and cover are preferably made of plastic. Plastic materials such as general purpose polystyrene are
10 conveniently injection molded into the desired configurations, while providing sufficient rigidity and durability for continual, frequent and repeated use of the dispenser. The cover, base, and calendar components may be injection molded in high impact polystyrene (HIPS).
15 The days of the week are imprinted onto the top calendar surface, and the indicator mark 15 is similarly highlighted by imprinting. The method of imprinting is either by hot stamping or by pad printing. These three components may be preassembled and supplied as a unit. As
20 alluded to briefly above, the tablet package blister pack 19 has collapsible pockets made from plastic, and inasmuch as they contain the tablets, it is preferable that the dispenser be sufficiently compact to fit in the palm of the user's hand. Typically, the diameter of the circular
25 platform which has twenty-eight (28) openings therein is about 3.0 inches (7.6 cm.), while the support is slightly larger.

The refill composite consists of a platform
30 injection-molded in medium impact polystyrene (MIPS) and a blister unit containing the pills. The platform and blister are bonded together in a fixed orientation. The blister may comprise polyvinyl chloride (PVC) film which is thermoformed into cavities to receive the tablets or
35 pills before laminating the aluminum foil lidding, and

This Sheet Has Been Replaced



- 28 -

subsequently die-cutting the laminate from the web, according to well-known manufacturing processes.

5 Thus there has been provided a tablet dispenser for dispensing tablets or similar solid-form pharmaceutical preparations according to a time related regimen whereby the user thereof is plainly informed when the tablet should be taken thereby eliminating the uncertainty and confusion which may often accompany the taking of such
10 pharmaceutical preparations and following of prescribed dosage regimens.

The scope of the present invention is not limited by the description, examples and suggested uses herein and
15 modifications can be made without departing from the intended scope and spirit of the invention. For example, other components may be added to the dispenser including additional locking mechanisms for making the package more child or tamper resistant or additional aesthetic features
20 including embossing or coloring of the package. The dispenser may also be easily adapted to different languages or days of periodicity of dosage by application of an adhesive label over the calendared knob. The dispenser may be further adopted for twice daily
25 pharmaceutical regimens by providing a.m. or p.m. markings in addition to the days of the week. Further, the ledges on the tablet dispenser base and notches on the tablet package may be interchanged by providing an extended cavity in the base to accept a notched tablet package
30 therein. The present invention may also be used to provide a dispenser for vitamins, minerals or other nutrients.

35

This Sheet Has Been Replaced



**THIS SHEET HAS BEEN
REPLACED**

- 29 -

As illustrated above, application of the dispenser of the present invention for medical and pharmaceutical uses can be accomplished by any clinical, medical and pharmaceutical methods and techniques as are presently and prospectively known to those skilled in the art. Thus it is intended that the present invention cover the modifications and variations of this invention provided that they come within the scope of the appended claims and their equivalents.

10

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

- 30 -

What is claimed is:

1. A tablet dispenser component system comprising:

5 as a first component a rotatable substantially
circular unidirectional knob having indicators of
periodicity thereon wherein the rotatable knob is
encircled with a notched skirt comprising a plurality of
notches spaced substantially equally apart, said rotatable
knob having unidirectional ratchet means comprising a
10 ratchet track with a plurality of ratchet stops whereby
each positive engagement of said ratchet stops corresponds
to a single space of each notch of the notched skirt;

as a second component a substantially flat support
having a single tablet dispensing aperture therein and a
15 rising wall portion protruding therefrom to form an
interior cup portion thereon, a first engagement means
whereby said rotatable knob is rotatably joined to said
flat support, a fixed center axis means around which said
rotatable knob is rotated in a circular fashion, and a
20 second engagement means interposed with said
unidirectional ratchet means forming a functional system
therewith; and

a third component which is a separate and removable
tablet package adapted to fit over the rotatable knob with
25 means to positively engage the notched skirt such that the
two components rotate in unison, said tablet package
comprising a plurality of collapsible tablet pockets each
containing a tablet arranged substantially circularly
about the package whereby the spacing of the tablet
30 pockets corresponds to each stop of the ratchet means
whereby a new tablet is placed over the tablet dispensing
aperture upon the positive engagement of each stop on the
ratcheted rotatable knob, said tablet pockets being
covered with a frangible membrane which is interposed
35 between said pockets and the single tablet dispensing
aperture of the support, whereby a tablet is dispensed



* C L M S *



THIS SHEET HAS BEEN
REPLACED

- 31 -

from the package by collapsing the pocket which is in registry with said aperture thereby urging said tablet to fracture said membrane and pass through said aperture.

5 2. The tablet dispenser system of claim 1 wherein the
substantially flat support and interior cup portion formed
thereon by wall portions rising therefrom is provided with
means for supporting the tablet package in a substantially
10 circular path around the fixed center axis and rotatable
knob and for interlocking the tablet package in place upon
engagement of a first stop of the unidirectional ratcheted
and rotatable knob, whereby the tablet package is
removable from the support means upon completion of a full
rotation of the ratcheted and rotatable knob.

15 3. The tablet dispenser system of claim 2 wherein the
rotatable knob comprises a calendared ring which is
unidirectionally rotatable in a clockwise direction about
the fixed center axis and the notched skirt is attached to
20 the periphery of the rotatable knob.

4. The tablet dispenser system of claim 3 wherein the
fixed center axis has an indicator mark aligned with the
single tablet dispensing aperture of the flat support
25 component.

5. The tablet dispenser system of claim 1 wherein the
means to positively engage the notched skirt comprises at
least two complementary projections to positively engage
30 at least two notches in the notched skirt when fitted over
the rotatable knob.

6. The tablet dispenser system of claim 1 wherein the
collapsible tablet pockets are formed to accommodate
35 tablets of substantially circular, non-circular or caplet-
like shape.



THIS SHEET HAS BEEN
REPLACED

- 32 -

7. The tablet dispenser system of claim 1 wherein the substantially flat support is adapted for receiving and interlocking the tablet package by the provision of at least two inward extending ledges protruding from the rising wall portion, whereby the shape and orientation of said ledges correspond to at least two complementary recesses on the tablet packages permitting reception of said tablet package onto the flat support in a single initial position of tablet orientation about the flat support whereby a designated tablet is positioned above the tablet dispensing aperture at the initial tablet position and the tablet package is interlocked upon a single advance of the calendared rotatable knob by overlap with said ledges; whereby said tablet package is not disengageable or removable until a complete rotation of the knob returns the tablet package to the initial tablet position.

8. The tablet dispenser system of claim 7 whereby the inward extending ledges are spatially arrayed to inhibit the receipt of the package on the substantially flat support and the disengagement, discharge or removal of the tablet package from the substantially flat support at any position other than the initial tablet position.

9. The tablet dispenser system of claim 7 whereby the inward extending ledges are shaped or sized to receive or disengage with the complementary notched tablet package only at the initial tablet position.

This Sheet Has Been Replaced



* C L M S *

- 33 -

10. The tablet dispenser system of claim 1 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package
5 corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support upon each advance of the positively engaging stop of the
10 rotatable knob.

11. The tablet dispenser system of claim 1 wherein the calendared rotatable knob is provided with periodicity means consisting of days of the week in at least one set
15 of seven images on the rotatable knob such that there is an ordered one-to-one correspondence of days with ratchet stops and such that any setting of the knob in relation to the indicator mark constitutes a predisposed start day setting for the package.

20

12. The tablet dispenser system of claim 8 wherein the spacial array of the inward extending ledges is asymmetrical.

25 13. The tablet dispenser system of claim 7 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package
30 corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support upon each advance of the positively engaging stop of the
rotatable knob.

35

This Sheet Has Been Replaced



* C L M S *

- 34 -

14. The tablet dispenser system of claim 8 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package
5 corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support portion upon each advance of the positively engaging stop
10 of the rotatable knob.

15. The tablet dispenser system of claim 9 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to
15 a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support
20 portion upon each advance of the positively engaging stop of the rotatable knob.

16. The tablet dispenser system of claim 1 further comprising a lid portion to provide an enclosed compact
25 package.

17. The tablet dispenser system of claim 16 wherein the lid and support comprise interlocking means for engaging the compact package in a closed position.
30

18. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 1 and oral contraceptive tablets.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

- 35 -

19. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 2 and oral contraceptive tablets.
- 5 20. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 7 and oral contraceptive tablets.
- 10 21. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 10 and oral contraceptive tablets.
- 15 22. A method of administering a prescribed regimen of tablet medication comprising the utilization of the tablet dispenser system of claim 10 in which the tablets deployed therein, and the orientation of the days of the week to each tablet position, are adapted to a prescribed regimen.
- 20 23. The method of claim 22 wherein the prescribed regimen provides oral contraceptive or hormone replacement therapy.
- 25 24. A tablet package adapted for receipt and use in the tablet dispenser system of claim 1.
- 30 25. A tablet package adapted for receipt and use in the tablet dispenser system of claim 7.
- 35 26. A method of filling the tablet dispenser system of claim 7 comprising the steps of aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support and thereafter placing said tablet package onto the substantially flat support.



* C L M S *



THIS SHEET HAS BEEN
REPLACED

- 36 -

27. A method of filling the tablet dispenser system of claim 8 comprising the steps of aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support and thereafter placing said tablet package onto the substantially flat support.

28. A method of filling the tablet dispenser system of claim 9 comprising the step of aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support and thereafter placing said tablet package onto the substantially flat support.

29. A method of filling the tablet dispenser system of claim 13 comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position; aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support, and placing said tablet package onto the substantially flat support.

30. A method of filling the tablet dispenser system of claim 14 comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position, aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support, and placing said tablet package onto the substantially flat support.



* C L M S *



- 37 -

31. A method of filling the tablet dispenser system of claim 15 comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position, aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support, and placing said tablet package onto the substantially flat support.
32. The filling method of claim 28 further comprising the subsequent steps of dispensing the initial tablet located at the initial tablet position and rotating the rotatable knob one stop to the next day in order to positively engage the tablet package in the tablet dispenser, thereby inhibiting disengagement of the package until a full rotation of the rotatable knob has been completed.
33. A tablet dispenser component system comprising:
- a circular tablet package comprising a plurality of sequentially arranged collapsible tablet pockets each containing a tablet arranged substantially circularly about the package and at least two asymmetrically spaced notches about either the inner or outer periphery of the ringed circular package;
 - a base support comprising a single tablet dispenser aperture therein and at least two ledges which are shaped, sized, or oriented to receive the tablet package in only one position of positive engagement thereon whereby a designated tablet of the tablet package is provided over the single tablet dispensing aperture;
 - means for rotating the circular tablet package about the base support around a center axis portion of the base support to locate tablets in the sequentially arranged



* C L M S *

THIS SHEET HAS BEEN
REPLACED

- 38 -

tablet pockets of the tablet package over the tablet dispensing aperture for dispensing therefrom; and

means for positively engaging the tablet package onto the base support upon the initial dispensing of a tablet from the tablet package and subsequent rotation of the tablet package causing the next sequentially arranged tablet pocket to be positioned over the tablet dispensing aperture.

10 34. A tablet package adapted for placement into the tablet dispenser system of claim 33 by the inclusion of notches in the tablet package which correspond to ledges of the base support.

15 35. The tablet dispenser of claim 33 wherein two spaced notches of the tablet package are asymmetrically spaced.

20 36. A tablet package adapted to be provided into the tablet dispenser system of claim 33 by the inclusion of at least two notches which are oriented asymmetrically to each other and at least two ledges of the base support which are complementary spaced in relation to the notches.

25 37. A circular tablet package adapted for loading into a tablet dispenser system wherein the tablet package comprises a hole in its center and notches in its outer periphery which are shaped, sized or oriented to be placed upon a base support of the tablet dispenser system which support comprises a center knob and protruding ledges
30 which are complementary to the hole and notches of the tablet package, respectively, whereby the tablet package is received onto the base support of the tablet dispenser system in only a single desired orientation providing a designated tablet of the tablet package over a single
35 tablet dispensing aperture in the base support of the tablet dispenser system.



* C L M S *



- 39 -

38. The circular tablet package of claim 37 wherein the notches of the tablet package are asymmetrically spaced to complement asymmetrically spaced ledges on the base support of the tablet dispenser system.

5

39. The circular tablet package of claim 37 further comprising lugs inwardly protruding from the periphery of the center hole to engage a complementily notched skirt on the center knob of the base support of a tablet dispenser system.

10

40. A tablet dispenser system for dispensing a regimen of tablets in a designated sequence comprising:

as a first element, a flat support having a single tablet dispensing aperture therein and an encircling wall portion erected thereto defining a cup-like interior;

15

as a second element, a pivot connected to the center of the flat support defining an axis;

as a third element a rotatable knob having a top surface with indicators of periodicity marked thereon in correspondence with the tablets, a means for gripping thereby to apply rotary force, and a central bore, sized for encircling the pivot;

20

as a fourth element, a first connecting means for rotatably connecting the rotatable knob coaxially to the flat support;

25

as a fifth element, a means for intermittent unidirectional advancement of the knob about the axis with registry corresponding to the aperture and the indicators of periodicity;

30

as a sixth element, a circular tablet package comprising a housing containing the tablets in a plurality of frangibly lidded collapsible tablet pockets arranged circularly about the package at a radial distance corresponding to the distance of the aperture from the

35





- 40 -

axis and having a central bore sized for encircling the rotatable knob;

as a seventh element, a means for orienting the tablet package to the flat support whereby the first
5 tablet is located over the aperture and misorientation of the tablet package to the flat support is prevented; and

as a eighth element, a second connecting means for connecting the tablet package to the rotatable knob upon loading onto the flat support for any initial setting of
10 the knob such that rotary force applied to the knob is translated to the tablet package providing the manner in which the tablet package is advanced thereby causing each tablet of the regimen to be presented in the designated order, accompanied with the corresponding indicator of
15 periodicity and registered by the intermittent unidirectional advancement means, to the aperture for the purpose of dispensing a single tablet at a time from the tablet dispenser by collapsing the collapsible tablet pocket positioned thereto and urging the tablet through
20 the frangible lidding into and through the aperture.

41. The tablet dispenser of claim 40 comprising as an additional element a means for indicating the location of the aperture remaining visible after loading the tablet
25 package thereby providing a fixed registry point.

42. The tablet dispenser system of claim 40 further comprising a means for retaining the tablet package onto the flat support and in continuous connection with the
30 rotatable knob.

43. The tablet dispenser system of claim 40 further comprising a cover which encloses the tablet dispenser.





- 41 -

44. The tablet dispenser system of claim 43 wherein the cover is hinged to the flat support and secured in a closed position by a latch means.

5 45. The tablet dispenser system of claim 41 wherein the pivot comprises a stationary flat surface elevated above the flat support by a support means projecting through a through-bore of the rotatable knob after assembly thereto.

10 46. The tablet dispenser system of claim 45 wherein the support means comprises a stalk having means for orienting the pivot stationary flat surface to the flat support, and thereby to the indicating means, and further having means for fastening the stalk rigidly to the flat support.

15 47. The tablet dispenser system of claim 46 wherein the means for fastening the stalk comprises a cylindrical wall portion, attached to the flat support at its center and contained within the bore of the rotatable knob when
20 assembled thereto, for receiving the pivot stalk with a friction fit to the interior surface of the cylindrical wall.

25 48. The tablet dispenser system of claim 47 wherein the means for orienting the stalk comprises a plurality of radial vanes extending inward from the cylindrical wall portion wherein said vanes nest within complementary slots in the base of the stalk when assembled thereto.

30

35



* C L M S *



- 42 -

49. The tablet dispenser system of claim 46 wherein the first connecting means comprises an overlap of a pivot stationary flat surface bottom surface and a plurality of clockwise-tending spring pawls based at the bottom of a second interior cylindrical wall spacing the spring pawls beneath the inner edge of the top surface of the rotatable knob, thereby forming a recess, the second interior cylindrical wall closely encircling the pivot stationary flat surface interposed in the recess and positioned relative thereto in assembly by an essentially cylindrical exterior wall elevating the top surface to a point of contact between the spring pawls and the pivot stationary flat surface when bottomed on the flat support.

50. The tablet dispenser system of claim 49 wherein the means for intermittent unidirectional advancement of the rotatable knob comprises the plurality of clockwise-tending spring pawls cantilevered for an upward bias and arrayed to match a circular clockwise-tending ratchet track formed into the pivot stationary flat surface bottom surface, with ridge and recess geometry of a conventional design and in registry with the indicators of periodicity and the indicating means, the interaction of components such that the spring pawls are urged downward by the rotation of the ratchet track over sliding face surfaces of the spring pawls, the spring pawls subsequently clearing the ridges and springing back into the recesses of the ratchet track thus simultaneously interrupting the rotation, positively locating the rotatable knob, and locking against counterclockwise thrust through interference of abutting face surfaces of the spring pawls and ratchet track ridges.

35



* C L M S *

THIS SHEET HAS BEEN
REPLACED

- 43 -

51. The tablet dispenser system of claim 50 wherein the method of assembling the flat support, the rotatable knob and the pivot comprises the steps of placing the rotatable knob over the center of the flat support, orienting the pivot to the flat support with the pivot orienting means, and connecting the pivot to the flat support with the pivot fastening means while coaxially inserting the pivot stationary flat surface into the recess formed by the second interior cylindrical wall of the rotatable knob, overlapping the spring pawls and interposing the spring pawls and ratchet track for cooperation therebetween.

52. The tablet dispenser system of claim 45 wherein the indicating means comprises a mark placed on the stationary flat surface of the pivot at the aperture position thereby facilitating visual alignment with the indicator of periodicity corresponding to the aperture position.

53. The tablet dispenser system of claim 41 wherein the means for orienting the tablet package comprises a plurality of ledges extending inwardly from the encircling wall portion of the flat support coupled with cut-aways on the periphery of the tablet package, complementary with the ledges in geometry and location, the ledges having underclearance for the rotation of the tablet package thereunder and spaced sufficiently apart to frustrate loading by angling the periphery underneath the ledges without proper alignment with the cut-aways, the periphery having sufficient stiffness to prevent forceable entry of the tablet package to the flat support without alignment of the ledges and cut-aways, the proper alignment of features thereby permitting receipt of the tablet package onto the flat support, the bypass of ledges and cut-aways occurring in no other than the preferred tablet orientation as a result of means for uniquely matching ledge and cut-away pairs.



THIS SHEET HAS BEEN
REPLACED

- 44 -

54. The tablet dispenser system of claim 53 wherein the periphery is stiffened by stiffening means comprising a rigid skeletal structure underlaying the tablet housing with apertures appropriately positioned to allow for the discharge of tablets through the underlayer, the skeletal structure fixed by bonding means to the tablet housing.

55. The tablet dispenser system of claim 54 wherein the bonding means comprises a plurality of posts erected from the skeletal structure and inserted through pilot holes provided in the tablet housing and subsequently headed over in rivet fashion for securing the assembly therewith.

56. The tablet dispenser system of claim 53 wherein the means for uniquely matching ledge and cut-away pairs comprises differing shapes for the ledge and cut-away pairs such that only one orientation results in a match.

57. The tablet dispenser system of claim 53 wherein the means for uniquely matching ledge and cut-away pairs comprises differing sizes for the ledge and cut-away pairs such that only one orientation results in a match.

58. The tablet dispenser system of claim 53 wherein the means for uniquely matching ledge and cut-away pairs comprises an asymmetrical spatial array of pairs such that only one orientation results in a match.

59. The tablet dispenser of claim 53 wherein a second indicating means comprises one of the ledges located adjacent to the aperture which is uniquely shaped like a pointer.





- 45 -

5 60. The tablet dispenser of claim 40 wherein the second connecting means comprises a notched skirt extending outward from the base of the rotatable knob with identical notches in registry with the intermittent unidirectional advancement means and at least one complementarily shaped lug on the tablet package which is positioned for interlocking with a corresponding notch when assembled thereto.

10 61. The tablet dispenser of claim 60 wherein the lugs and notches are reversed with respect to the rotatable knob and the tablet package.

15 62. The tablet dispenser of claim 60 wherein only two diametrically opposed lugs are used to assure firm connection with the notched skirt while providing ease of assembly.

20 63. The tablet dispenser of claim 62 wherein the lugs are weakly attached by fragile necks to a rigid skeletal structure underlaying the tablet housing and bonded by posts joined to the lugs and headed over in rivet-fashion after insertion through the complementary pilot holes in the tablet housing, thereby forming a robust composite, the weak attachment being such that the removal of the
25 spent tablet housing material ruptures the fragile necks through force applied at the post heads, thereby providing separation of materials for recycling and preventing unauthorized use of the skeletal structure.

30 64. The tablet dispenser system of claim 42 wherein the retaining means comprises a plurality of ledges extending inward with underclearance from the encircling wall portion of the flat support, the ledges matched to
35 complementary cut-aways on the periphery of the tablet package thereby providing unique orientation during





- 46 -

assembly, the ledges further overlapping the tablet package periphery for each position of the intermittent unidirectional advancement means other than the initial position, the ledges supplemented by a holding lug
5 extending from a slotted portion of the encircling wall portion of the flat support, the slots useful for providing spring-like flexibility to the intervening wall structure, the holding lug having a ledge portion overlapping the tablet dispenser periphery for every
10 position of the unidirectional advancement means and an inclined plane portion angled, during assembly, against the tablet package periphery such that downward force applied to the periphery flexes the slotted wall portion thereby allowing bypass of the tablet package and the
15 holding lug, the spring-back of the slotted wall portion providing a tactile confirmation of the seating of the tablet package onto the flat support and in positive interlock with the rotatable knob.

20 65. The tablet dispenser system of claim 64 wherein the method of disengagement and removal of the tablet package from the tablet dispenser comprises the steps of indexing the rotatable knob to the initial position and lifting the tablet package from a location opposite the holding lug
25 thereby clearing the ledges and pivoting over the lug into disengagement from the dispenser.

30 66. The tablet dispenser system of claim 40 wherein the tablet package after use is removed and replenished with a fresh tablet package providing thereby for a reusable dispenser, extendable in use through multiple refill replenishments.

35



* C L M S *



- 47 -

67. The tablet dispenser of claim 40 wherein the collapsible tablet pockets are formed to accommodate various shapes and sizes of tablets postured either on a surface or on edge.

5

68. The tablet dispenser of claim 41 wherein the indicators of periodicity are days of the week.

10

69. The tablet dispenser of claim 68 wherein the method for loading with selection of a preferred starting day comprises the steps of removing any previously loaded tablet package, rotating the rotatable knob until the desired day is aligned with the indicating means and loading the tablet package onto the flat support with registry of the designated first tablet to the desired day.

15

70. The tablet dispenser of claim 40 wherein the gripping means comprises an edge formed by the intersection of the top surface with an essentially cylindrical exterior wall which elevates the edge to an accessible height.

20

71. The tablet dispenser of claim 70 wherein the edge is knurled to facilitate hand gripping.

25

72. An intuitive tablet dispenser kit for dispensing a regimen of solid dosage preparations in a designated sequence comprising:

as a first element, a container;

30

as a second element, a refill carrier housing the solid dosage preparations in a circular array loaded into the container, the refill carrier presented separately upon introduction to emphasize a refillable feature;

35

as a third element, a means for individually dispensing the solid dosage preparations from the refill carrier; and



* C L M S *

THIS SHEET HAS BEEN
REPLACED

- 48 -

as a fourth element, a set of timing indicators,
appropriate for the course of therapy and in
correspondence with the solid dosage preparations in count
and layout, affixed to, and in registry with, the refill
5 carrier.

73. The intuitive tablet dispenser kit of claim 72
further comprising literature or labeling for informing
and instructing the patient, the physician or the
10 pharmacist as to the use of the tablet dispenser kit.

74. The intuitive tablet dispenser kit of claim 72
wherein a plurality of refill carriers are provided.



* C L M S *

- 49 -

ABSTRACT

5 This invention relates to a substantially circular
tablet dispenser component system which may be adapted for
a variable day start of a prescribed periodic tablet
regimen. Also provided are a tablet dispenser kit, a
tablet package adapted for filling the tablet dispenser
system, methods of filling the tablet dispenser of the
invention and methods of administering a prescribed
10 regimen of medication using the tablet dispenser system of
the invention.

This Sheet Has Been Replaced






FIG-1

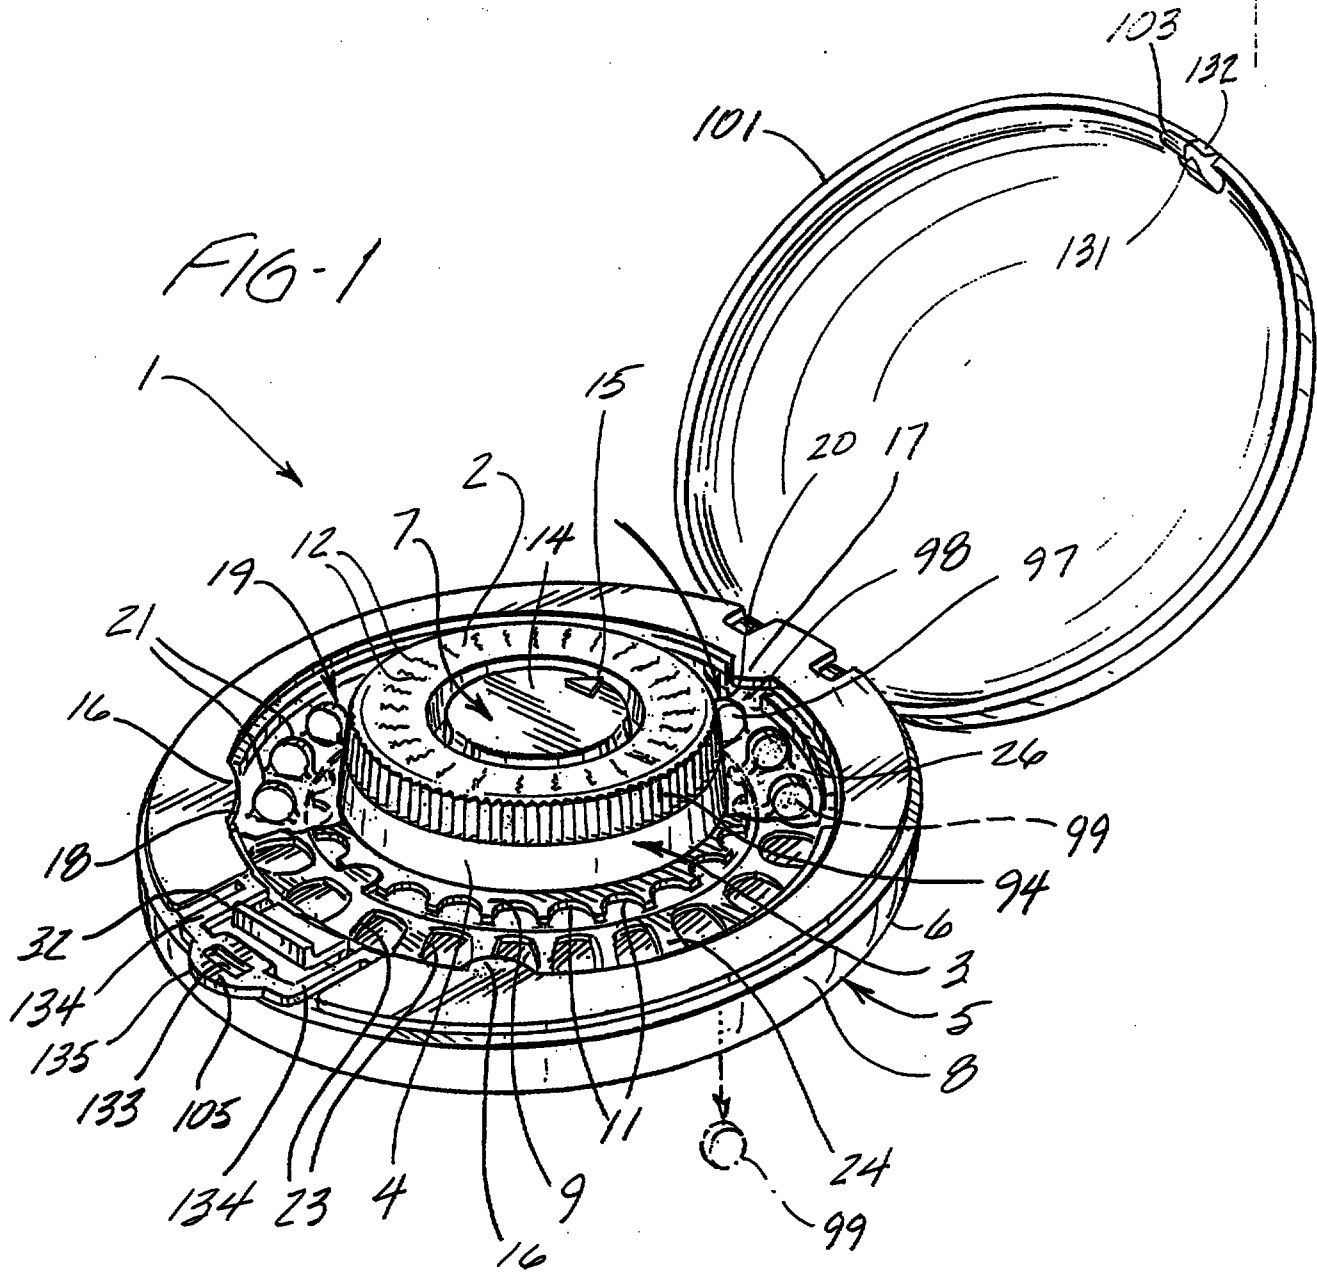


FIG-2

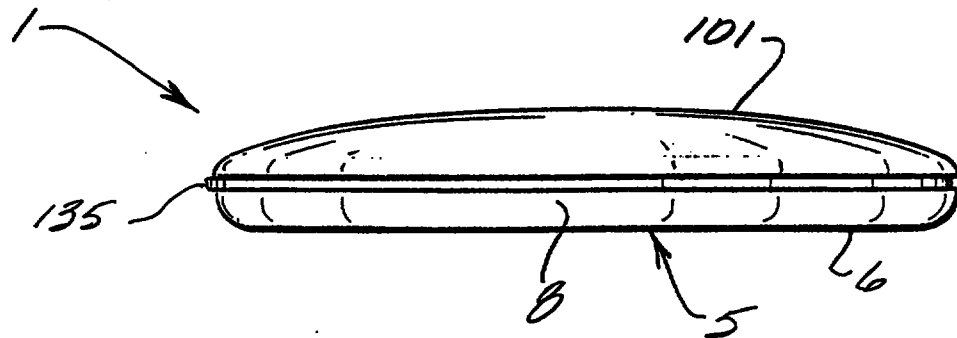
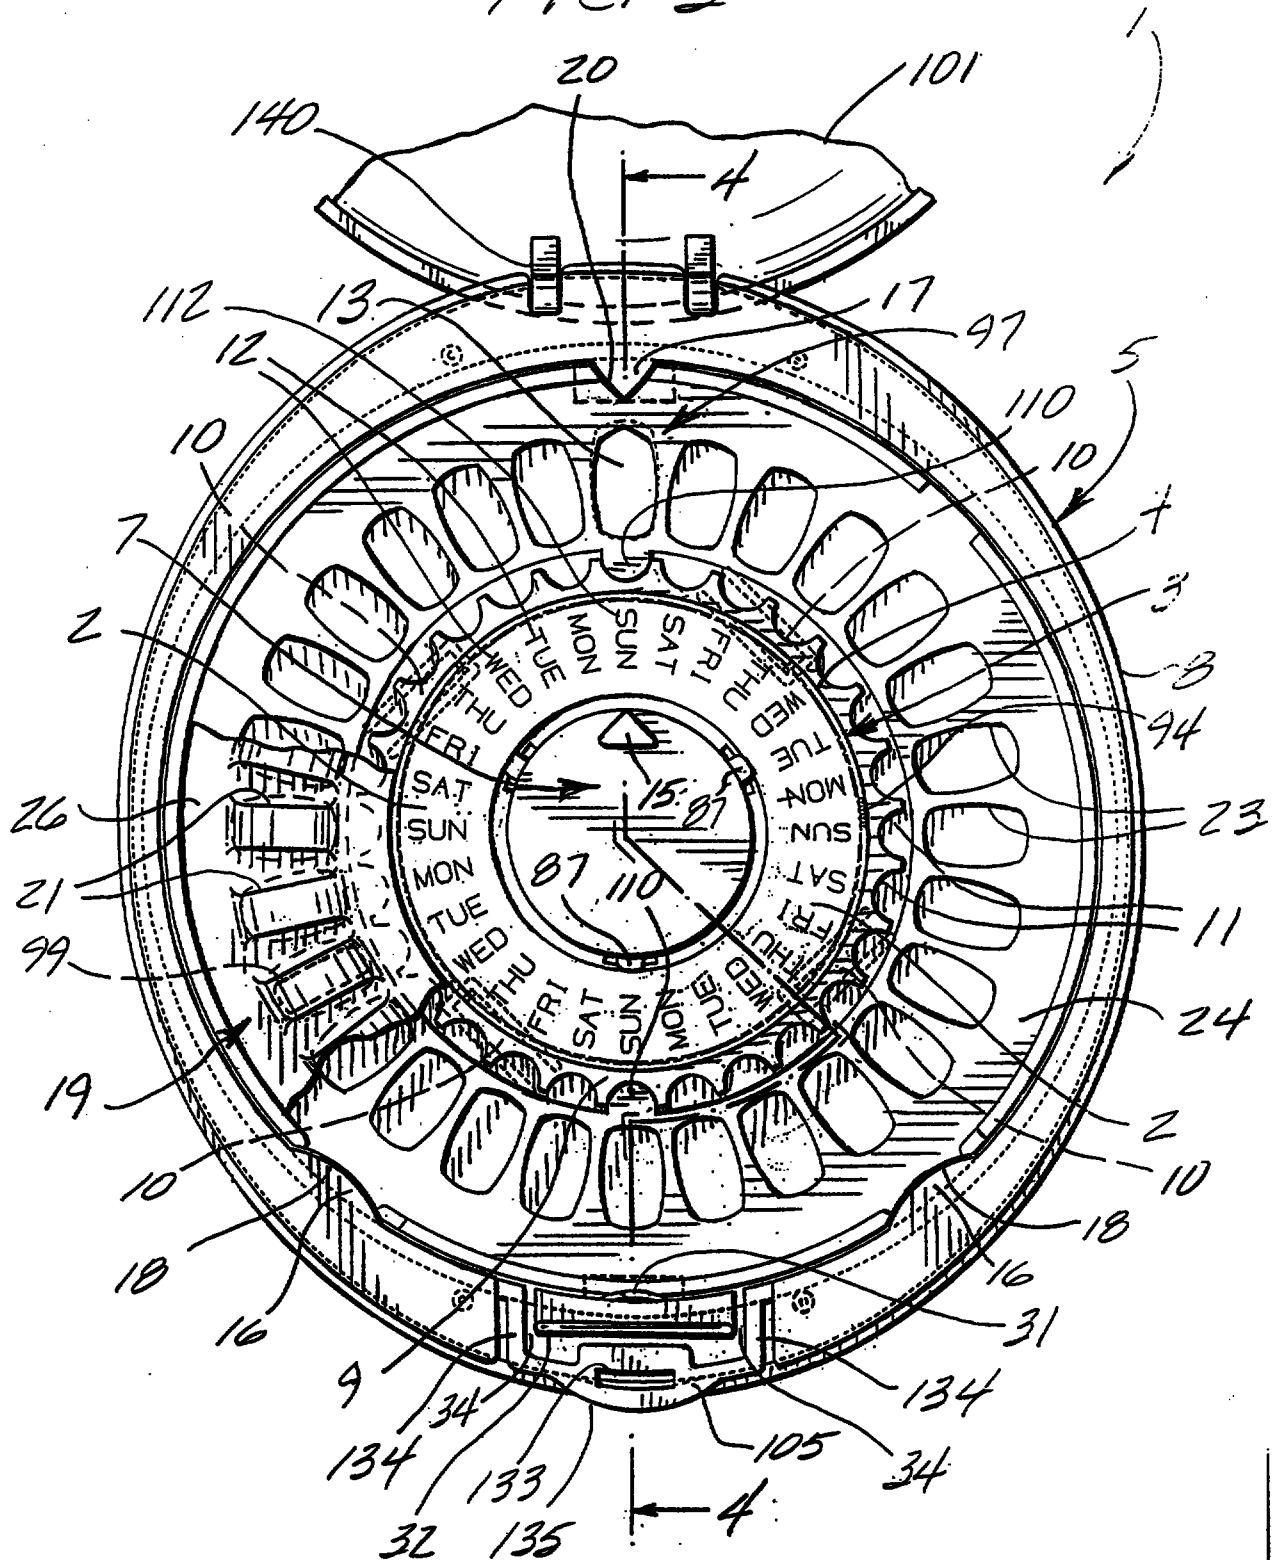



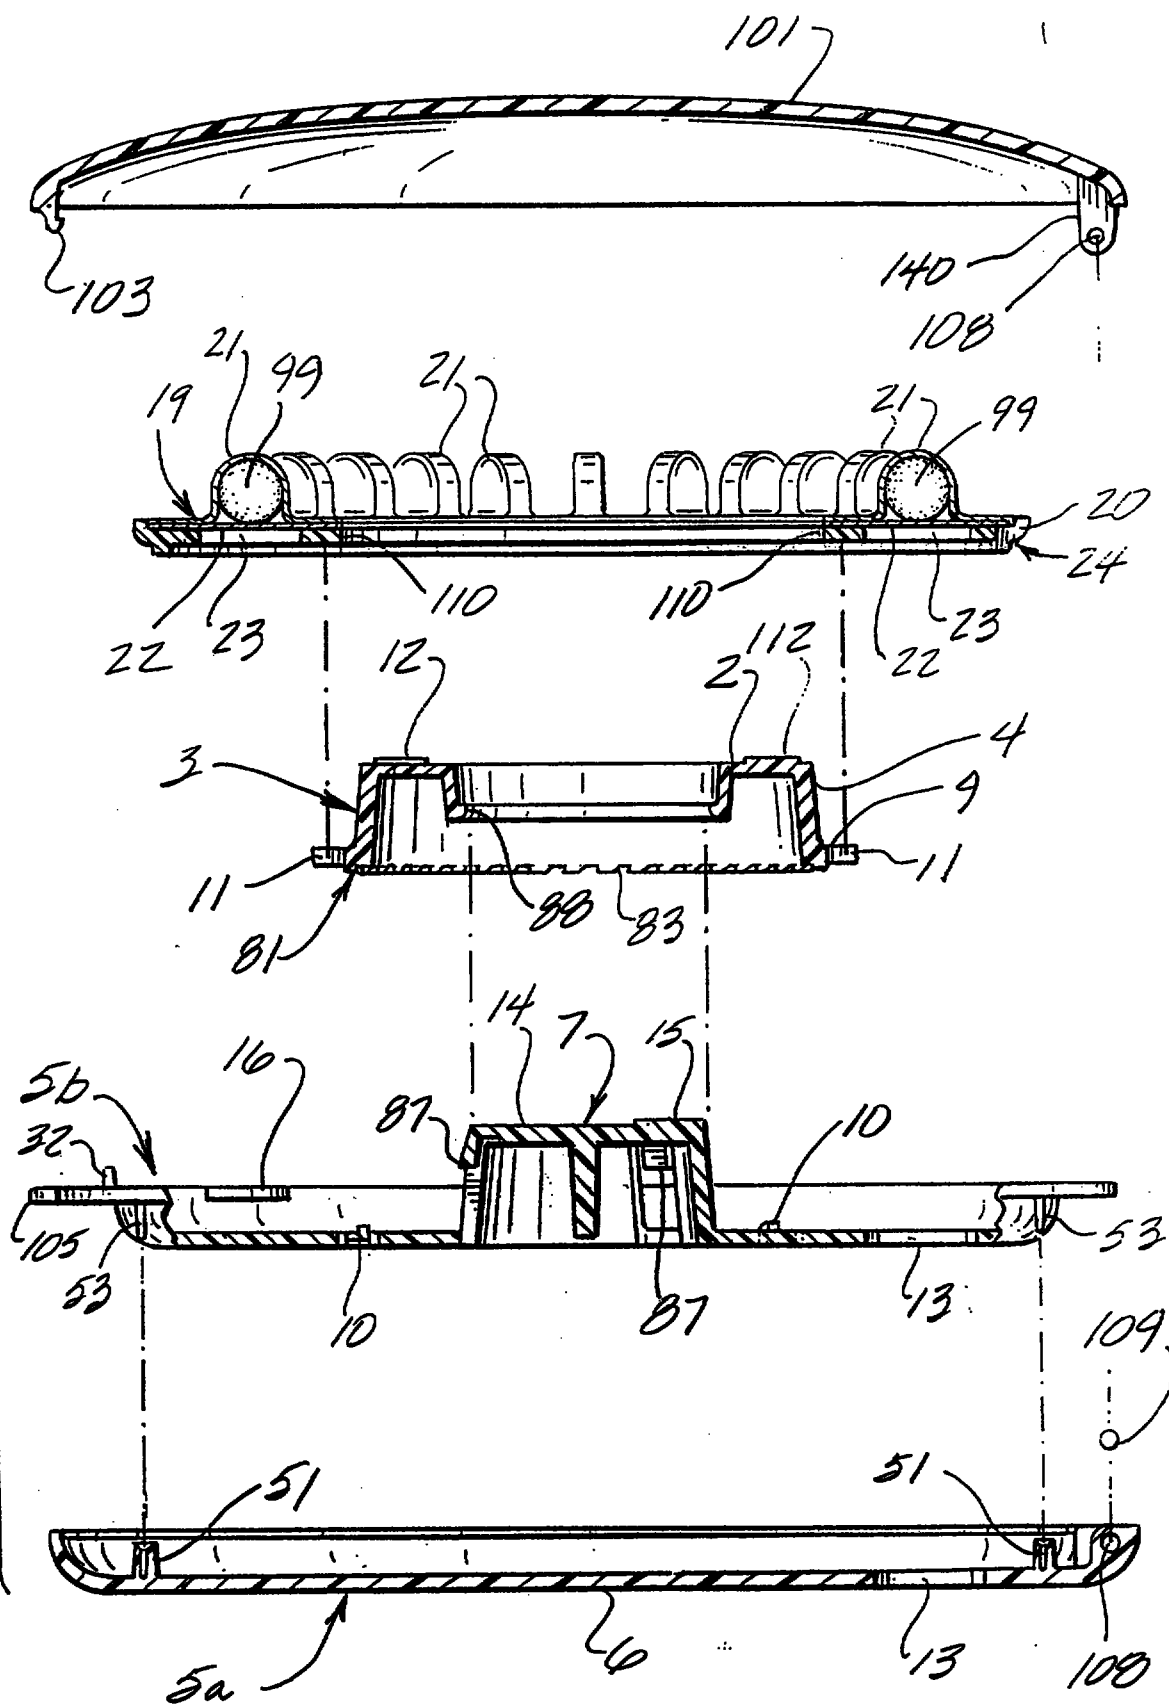


FIG-3



THIS SHEET HAS BEEN
REPLACED





THIS SHEET HAS BEEN
REPLACED

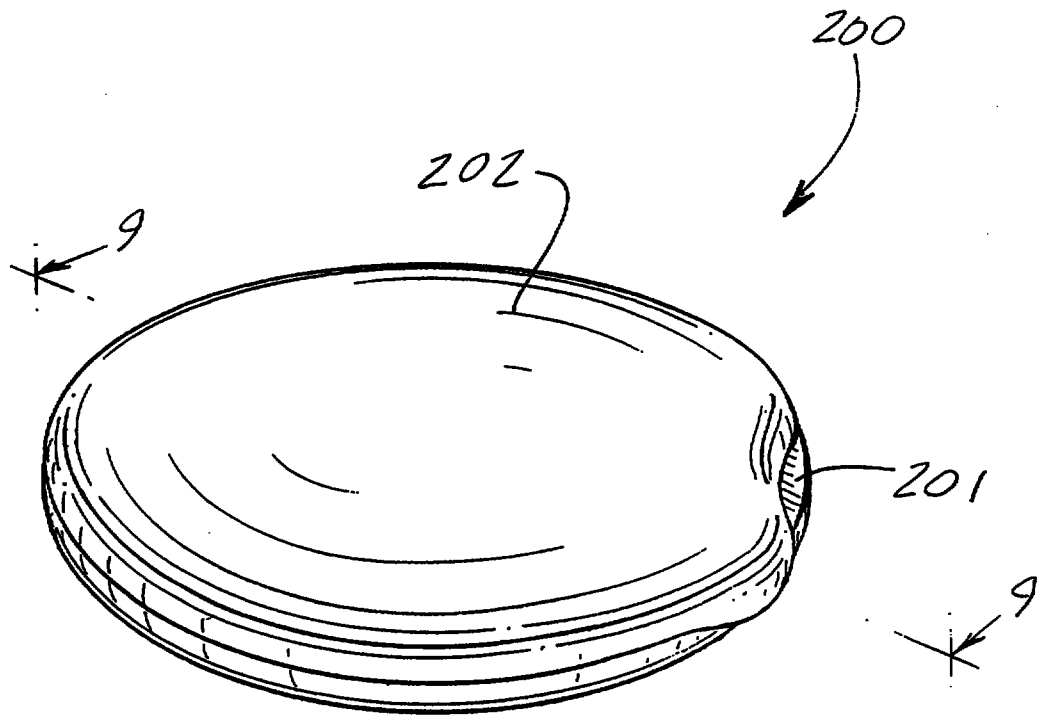


FIG-6

This Sheet Has Been Replaced



FIG-7

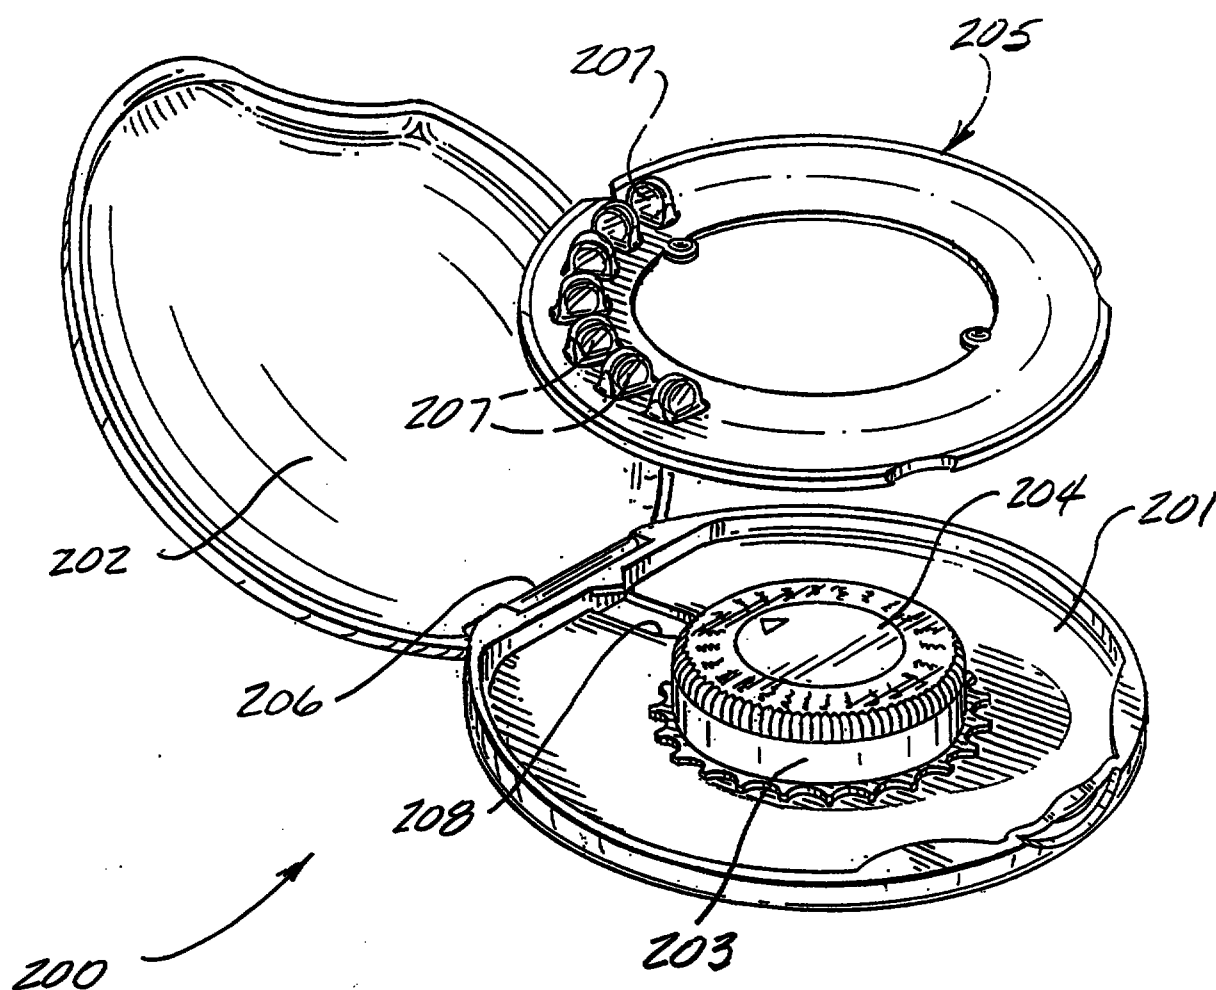




FIG. 8

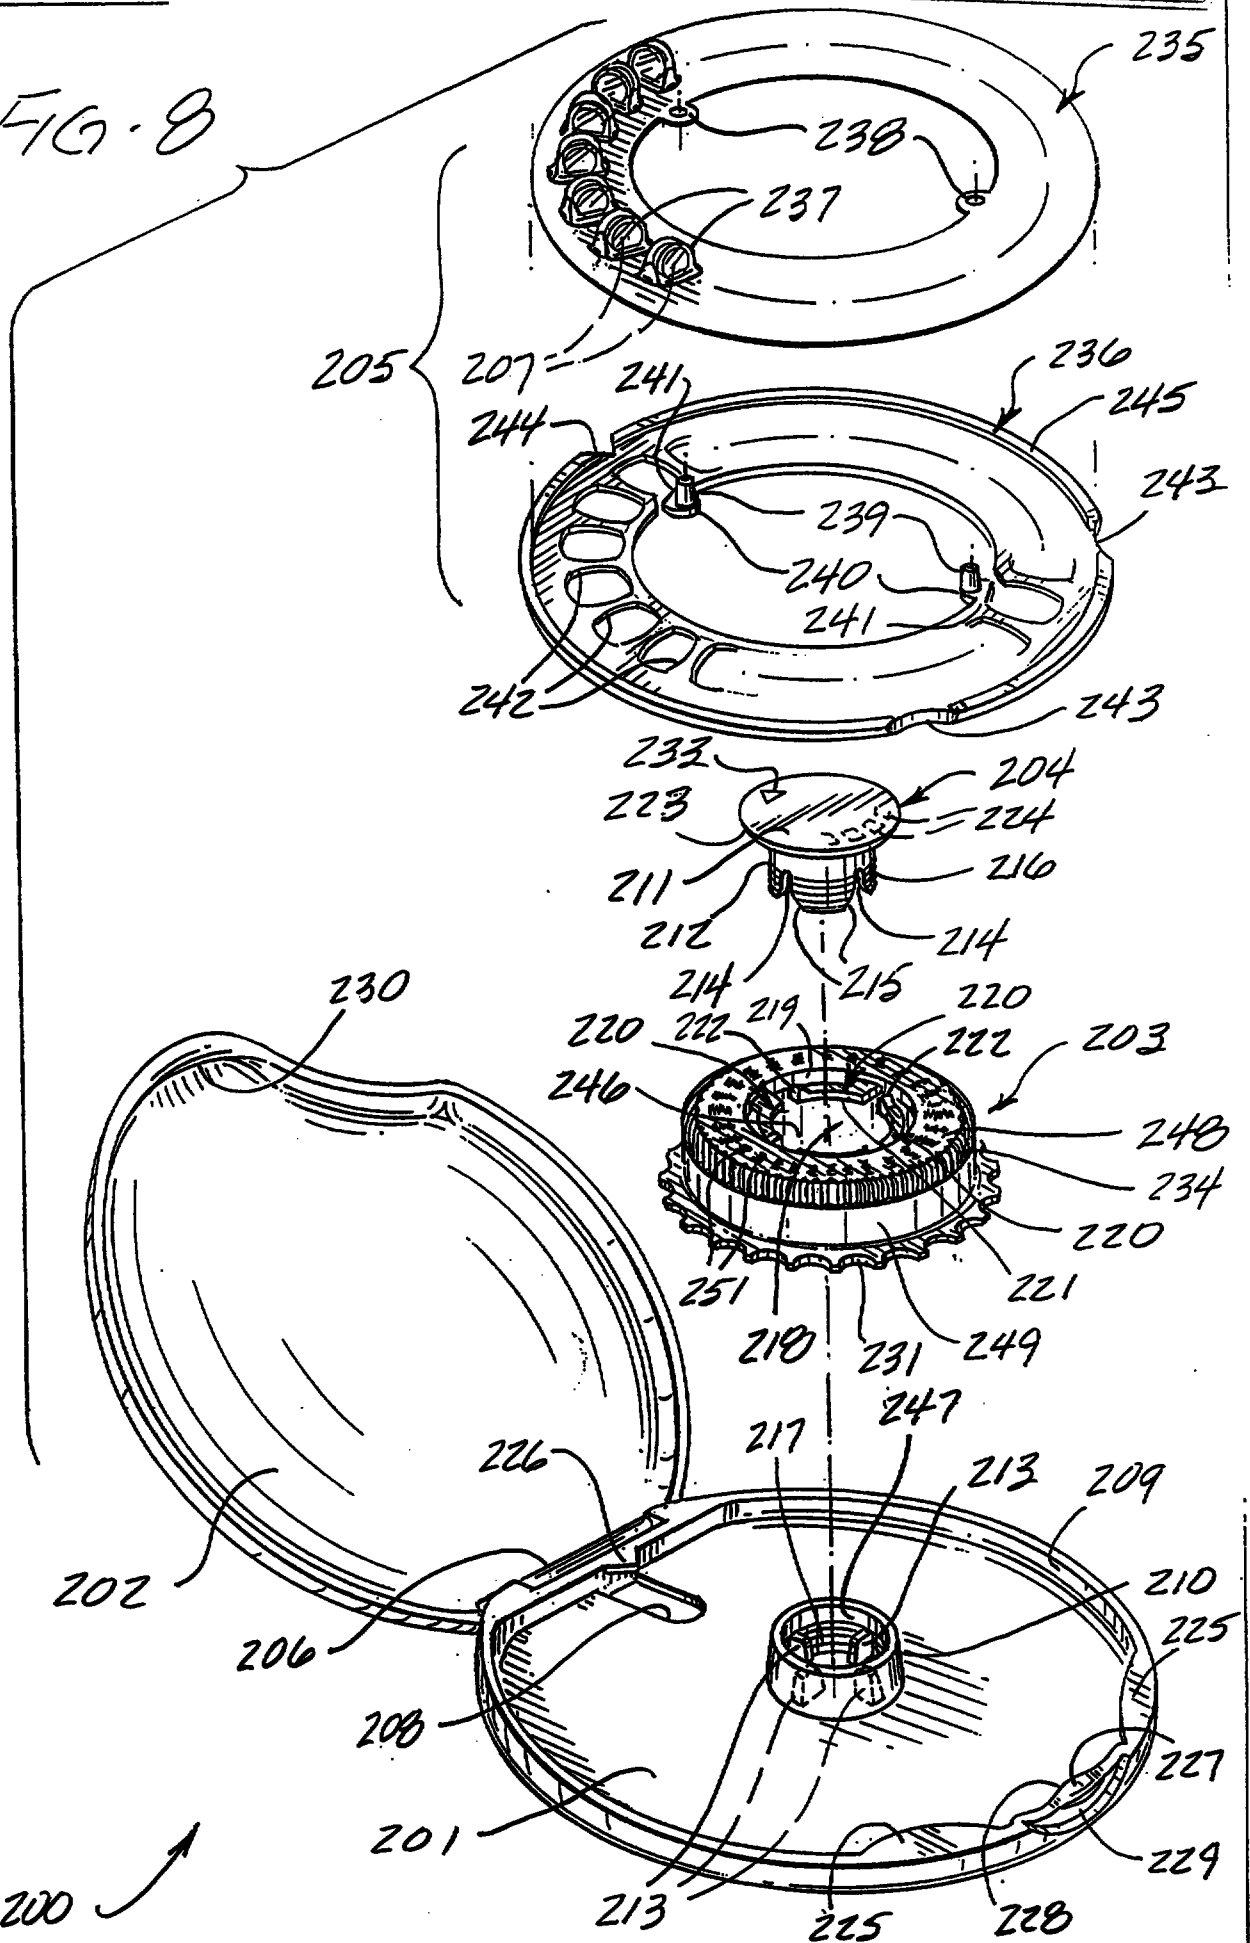


FIG-9

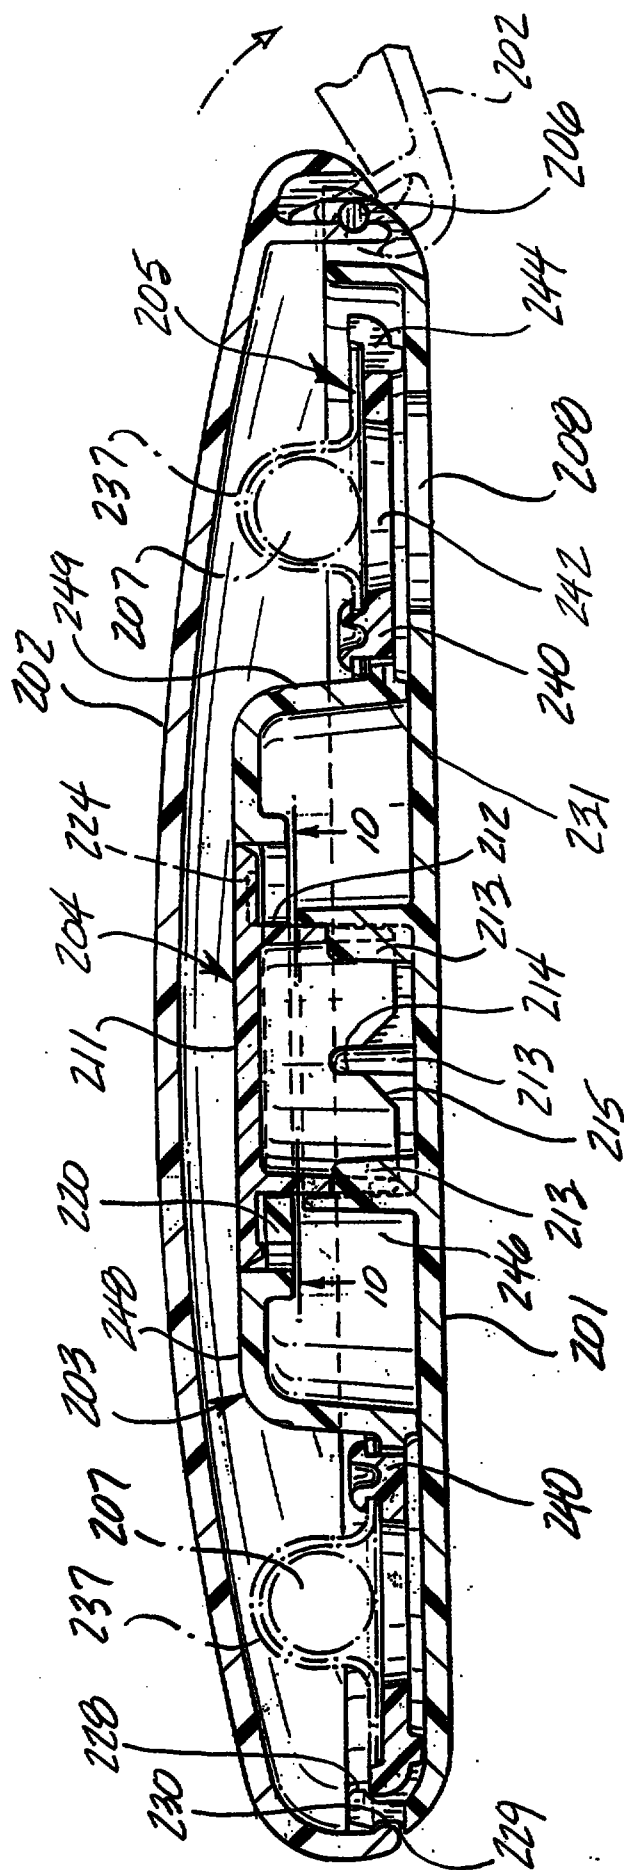




FIG-10

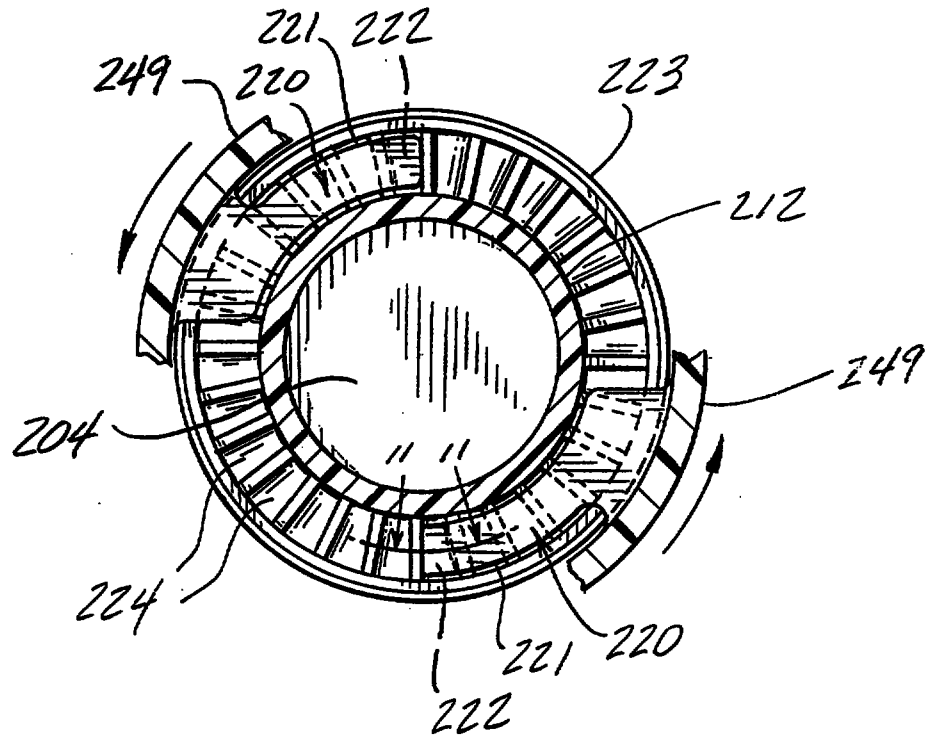


FIG-11

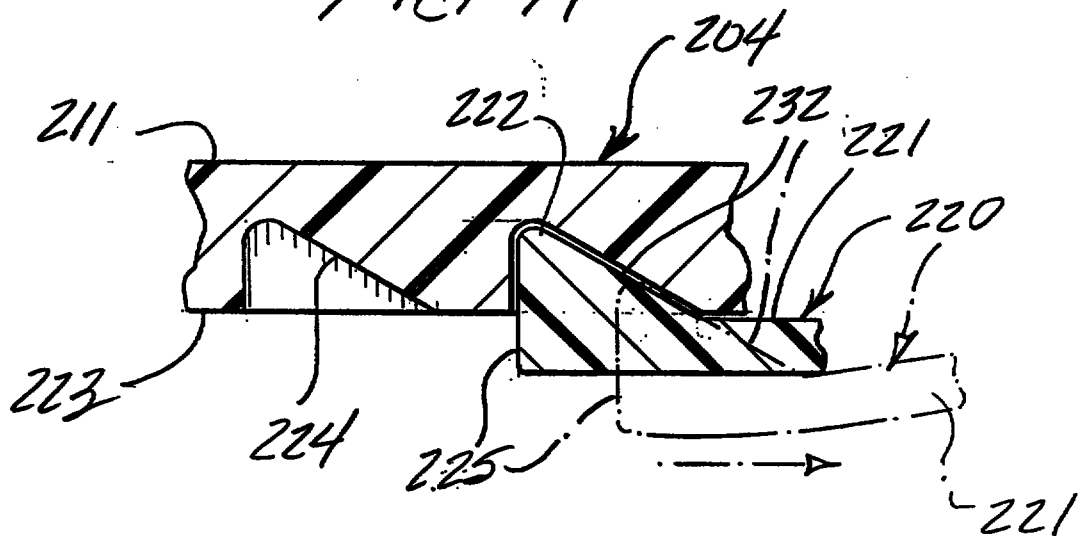
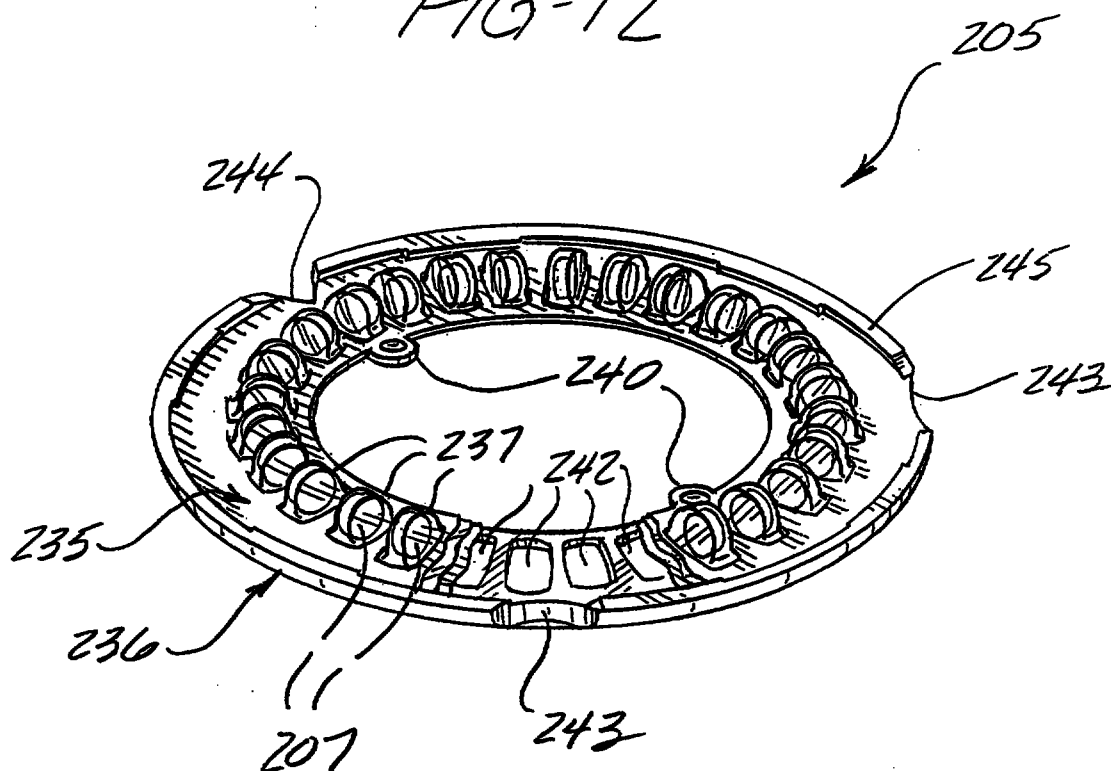
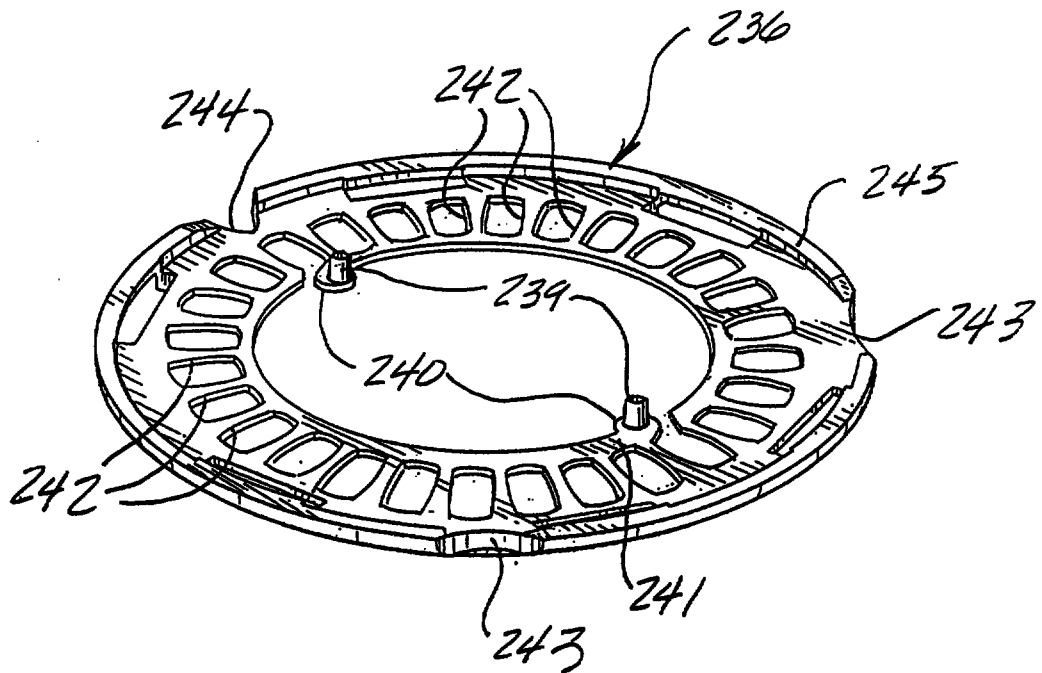


FIG-12



THIS SHEET HAS BEEN
REPLACED

FIG-13

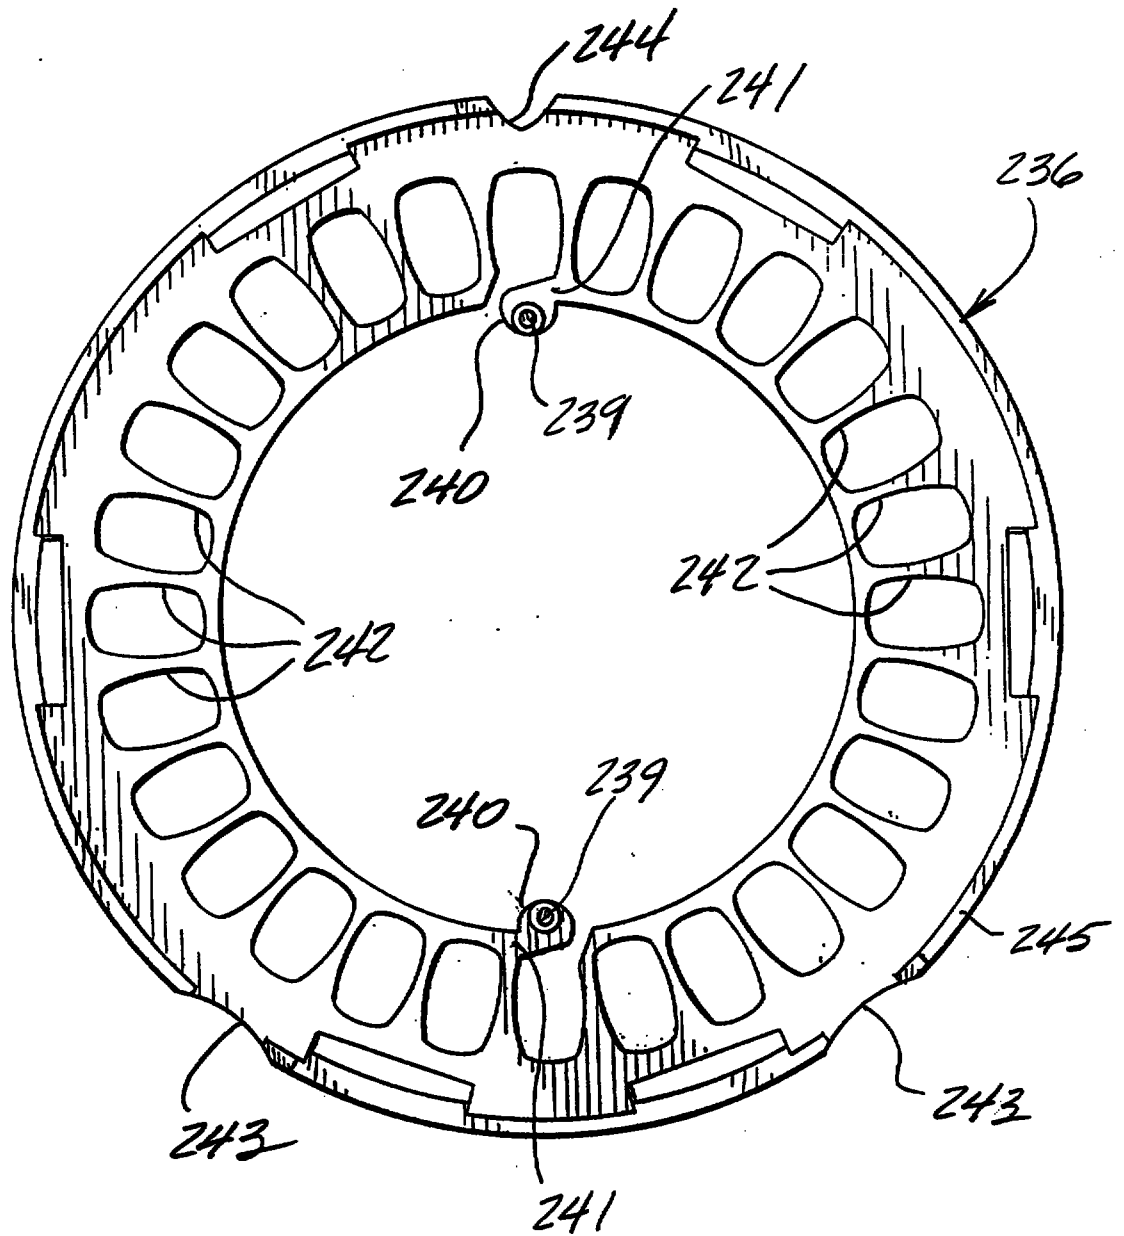


This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

FIG - 14



This Sheet Has Been Replaced



Variable Day Start Tablet DispenserField of the Invention

5 This invention relates to a substantially circular
tablet dispenser component system which may be adapted for
a variable day start of a prescribed periodic tablet
regimen. Also provided are a tablet dispenser kit, a
tablet package adopted for filling the tablet dispenser
10 system, methods of filling the tablet dispenser of the
invention and methods of administering a prescribed
regimen of medication using the tablet dispenser system of
the invention.

Background of the Invention

15 Medicaments and other pharmaceutical preparations are
often prescribed for patients on a time related or
scheduled dispensing basis. Examples of tablets or pills
that are prescribed in a set periodic regimen include
tablets or pills adapted for oral ingestion that are used
20 for birth control, for regulating blood pressure, for
regulating blood lipids, as antibiotics and for treating
a variety of other ailments such as diabetes. Such
extended time periodic regimens are particularly adaptable
to preventative medicine (e.g. regulating blood pressure
25 or birth control) or for treatment of chronic ailments
which all require a relatively long course of therapy.

The amount of drug provided in a solid form
pharmaceutical preparation such as a tablet or pill is
30 inherently controlled so that each tablet contains a fixed
amount of dosage so that there is little or no confusion
as to the amount which should be taken. Variability in
pharmaceutical administration is often, if not invariably,
attributable to patient uncertainty, forgetfulness and/or
35 confusion as to whether or not a tablet has been taken at

- 2 -

the prescribed rate and time. This problem can be compounded when the dosage is to be repeated a number of times daily or when multiple medicaments are prescribed or when medicaments are to be taken over a long course of therapy which may extend from weeks to years. This problem may be applicable to most every type of patient including the elderly, the chronically ill (who may be in a weakened state), and the active person engaged in a long term course of treatment such as contraception or hormone replacement therapy.

As a result of problems of confusion, uncertainty or forgetfulness a patient may in reality take more or less than the prescribed rate of dosage that is indicated, thereby, inadvertently altering the prescribed course of treatment. To assure maximum effectiveness of medication prescribed it is desirable to provide a dispenser that will aid the patient in adhering to the prescribed time schedule for dosing whether that be once daily, multiple daily doses or less frequent doses.

Tablet dispensers and devices for dispensing solid form pharmaceutical preparations such as tablets or pills over a time related sequence are known. Examples of such a tablet dispenser is disclosed in U.S. Patent Number 4,165,709 which provides for a dispenser which allows a user to take a tablet on a prescribed basis, e.g. a daily basis, by providing an indicator that denotes the days of the week. The disclosure of this patent is hereby incorporated herein by reference. No provision is available in this device for enabling one to preset a specific day of the week in which the first designated pill in a differing series of pills is to be taken in a fashion that is simple and efficient. For example, if an indicator mechanism is not adjustable and is preset to

- 3 -

require that the first pill of a regimen made up of different pills is to be taken on a particular day of the week, such as Sunday, and a user is prescribed the medication on a Monday, the user will be at risk for a period of time from Monday to the following Sunday. Producing seven different dispensers that will cover the start of each day of the week is a possible, albeit an impractical, solution to this problem.

Other patents such as U.S. Patent Nos. 4,915,256, 4,646,936 and 4,667,845 describe various pill dispensers which provide for a daily indicator which may designate the period when particular pills are to be taken and can be preset to start the regimen on any day selected by the user. While such pill dispensers accomplish a desirable end of providing for any day start of a prescribed regimen with means for pills to be dispensed on a given day, such are not entirely practical for various reasons. These devices may be either complicated to use or difficult to refill. For example, a counter clockwise rotation of a circular pill dispenser may be difficult to understand and unnatural for a user; a design requiring multiple steps which may be erroneously taken out of sequence could lead to patient confusion or frustration and/or a noncompliant package, whereby a designated initial pill is not provided in the desired initial position in the dispenser.

It is therefore an object of the present invention to provide a unique design for dispensing tablets which is simple and intuitive to use, readily refillable by the patient/consumer and relatively foolproof, i.e. assures compliance and avoids inadvertent mistakes. Further, the present invention is intended to provide a dispensing system which can provide a prescribed regimen of pills in a consistent manner with a high degree of confidence while

also providing an any day start feature. Additional objects and advantages of the invention will be set forth, in part in the description which follows and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention are realized and obtained by means of the devices, combinations, and methods particularly pointed out in the appended claims.

10 Summary of the Invention

To achieve the objects and purposes of the invention, as embodied and fully described herein, the present invention provides a tablet dispenser component system comprising as a first component a rotatable substantially circular unidirectional knob having indicators of periodicity thereon. The rotatable knob is encircled with a notched skirt comprising a plurality of notches spaced substantially equally apart.

20 A second component comprises a substantially flat support having a single tablet dispensing aperture and a rising wall portion protruding therefrom to form an interior cup portion. A third component comprises a center axis means which is engaged and fixed onto the flat support. A first engagement means is provided whereby the rotatable knob is rotatably joined to the flat support. A second engagement means is provided comprising unidirectional ratchet means to form a functional system with the rotatable knob for unidirectionally rotating the rotatable knob in a circular fashion about the center axis means.

The rotatable knob and either the flat support or central axis means have unidirectional ratchet means comprising a plurality of ratchet stops corresponding to

06 MAR 1996

Date

- 5 -

a single space or notch on the notched skirt. In preferred embodiments the ratchet means comprises a ratchet track and spring pawls for positive engagement into the track to provide for each ratchet stop. The track and pawls may be located on the rotatable knob and fixed center axis or flat support. For example, the track may be located on the rotatable knob and the spring pawls located below the rotatable knob on the flat support or the track may be located on the center axis means and the spring pawls located on the rotatable knob.

The fourth component of the system comprises a separate and removable tablet package adapted to fit over the rotatable knob with means to positively engage the notched skirt such that the two components rotate in unison. The tablet package comprises a plurality of collapsible tablet pockets each containing a tablet arranged substantially circularly about the package. The spacing of the tablet pockets corresponds to each stop of the ratchet means whereby a new tablet is placed over the tablet dispensing aperture upon the positive engagement of each stop on the ratcheted rotatable knob. The tablet pockets are lidded with a frangible membrane which is interposed between the pockets and the single tablet dispensing aperture of the support. A tablet is dispensed from the package by collapsing the pocket which is in registry with the aperture thereby urging the tablet to fracture the membrane and pass through the aperture. The collapsible tablet pockets are formed to accommodate tablets of substantially circular, non-circular or caplet-like shape. In preferred embodiments the tablet package is fixed to a substantially rigid or stiff platform piece comprising a plurality of tablet apertures which correspond to the tablet pockets and one or more, preferably two, sprocket lugs on the interior thereof to positively fit in and engage the notched skirt.

- 6 -

In preferred embodiments of the tablet dispenser of the invention the substantially flat support and interior cup portion, formed by wall portions rising from the flat support base is provided with means for retaining the tablet package and for interlocking the tablet package in place upon engagement of a first stop of the unidirectional ratcheted and rotatable knob. The tablet package is removable from the support means upon completion of a full rotation of the ratcheted and rotatable knob. In a particularly preferred embodiment, the rotatable knob comprises a calendared ring which is unidirectionally rotatable about the fixed center axis in a clockwise direction wherein the notched skirt is attached to the rotatable ring portion thereof. The fixed center axis preferably has an indicator mark thereon aligned with the single tablet dispensing aperture of the flat support component.

In other preferred embodiments of the invention the tablet package has at least two complementary projections to positively engage at least two notches in the notched skirt when fitted over the rotatable knob. In preferred embodiments, the collapsible tablet pockets are formed to accommodate tablets of substantially circular, non-circular or caplet-like shape.

In a particularly preferred embodiment of the invention the substantially flat support is adapted with means for receiving, orienting and interlocking the tablet package by the provision of at least two, preferably three, inward extending ledges protruding from the rising wall portion therefrom. The shape and orientation of the ledges correspond to at least two, preferably three, complementary recesses on the tablet package, thus permitting reception of the tablet package onto the flat support in a single initial position of tablet orientation

about the flat support. A designated tablet is positioned above the tablet dispensing aperture at the initial tablet position and the tablet package is interlocked onto the base upon dispensing of the initial tablet followed by a
5 single advance of the calendared rotatable knob whereby the tablet package underlaps the ledges and is held in place thereby. The tablet package is therefore not disengageable or removable until a complete rotation of the knob returns the tablet package to the initial tablet
10 position.

In particularly preferred embodiments the inward extending ledges are spatially arrayed, preferably asymmetrically, to inhibit the receipt of the package on
15 the substantially flat support and the disengagement, discharge or removal of the tablet package from the substantially flat support at any position other than the initial tablet position. Further, the inward extending ledges are preferably, arrayed, shaped or sized to receive
20 or disengage with the complementary notched tablet package only at the initial tablet position.

In preferred embodiments of the system of the
25 invention the rotatable knob is marked with at least one set of the seven days of the week whereby each of the markings is oriented to a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support portion. A single
30 tablet corresponding to an indicated day of the week is fed over the single tablet dispensing aperture of the flat support portion upon each advance of the positively engaging stop of the calendared rotatable knob to the subsequent day of the week. The calendared rotatable knob
35 is preferably provided with days of the week in at least three sets of seven images on the rotatable knob. Any

- 8 -

setting of the calendared knob in relation to the indicator mark(s), thus, may constitute a predisposed start day setting for the package.

5 In preferred embodiments the tablet dispenser system comprises a lid or cover portion which fits over the support base to provide an enclosed compact package. Preferably, the lid and support include interlocking means for engaging the compact package in a closed position when
10 not in use.

 In other embodiments the invention is provided with medicament or a tablet dispenser kit for the administration of a particular medicinal regimen
15 comprising a tablet dispenser which is filled with the prescribed medicament in a preset prescribed orientation which complies with the periodic regimen of administration indicated. In particularly preferred embodiments, the medicament is an oral contraceptive or hormone replacement
20 therapy medicament provided in a prescribed regimen. In another kit embodiment, the tablet package is presented as a separate component from the dispensing container thereby calling attention to the refillability features of the system.

25 The present invention also provides for a method of administering a prescribed regimen of tablet medication comprising utilizing a tablet dispenser system of the invention whereby the tablets deployed therein and the
30 orientation of the days of the week to each tablet position is adapted to a prescribed regimen. Preferably, the prescribed regimen is for providing oral contraceptive or hormone replacement therapy.

35

- 9 -

The present invention also provides for a tablet package adapted for receipt and use in the tablet dispenser system of the invention which may be provided for refilling the tablet dispenser system.

5

Further, a method of filling or refilling the tablet dispenser system of the invention is provided which comprises the step of aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support of the tablet dispenser; and placing a tablet package onto the substantially flat support.

10

In other embodiments a method of filling the tablet dispenser system of the invention is provided comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position; aligning at least two complimentary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support; and placing the tablet package onto the substantially flat support.

15

20

25

In other embodiments, subsequent steps are provided for dispensing the initial tablet located at the initial tablet position and rotating the rotatable knob one stop to the next day to positively engage the tablet package in the tablet dispenser thereby inhibiting disengagement of the package until a full rotation of the rotatable knob has been completed. In another embodiment, the tablet package is anchored in the load position by a movable holding lug on the flat support of the tablet dispenser system.

30

35

- 10 -

In yet another embodiment, the tablet housing is bonded to the stiff platform by a plurality of posts attached to the platform, threaded through holes in the housing, and headed over in rivet fashion. The platform is designed to come apart upon removal of the tablet housing rendering it nonfunctional for reuse and separable for recycling.

In another embodiment of the invention a tablet dispenser component system is provided comprising:

a circular tablet package comprising a plurality of sequentially arranged collapsible tablet pockets each containing a tablet arranged substantially circularly about the package wherein the tablet package comprises at least two asymmetrically spaced notches about the outer periphery of the ringed circular package;

a base support comprising a single tablet dispenser aperture therein and at least two ledges which are shaped, sized, and oriented to receive the tablet package in only one position of positive engagement thereon whereby a designated tablet of the tablet package is provided over the single tablet dispensing aperture;

a means for rotating the circular tablet package about the base support around a center axis portion situated on the base support to orient tablets in the sequentially arranged tablet pockets of the tablet package over the tablet dispensing aperture; and

a means for positively engaging the tablet package onto the base support upon the initial dispensing of a tablet from the tablet package and rotation of the tablet package to move the next sequentially arranged tablet pocket over the tablet dispensing aperture.

In another embodiment of the invention a tablet dispenser system for dispensing a regimen of tablets in a designated sequence is provided comprising:

- 11 -

as a first element, a flat support having a single tablet dispensing aperture therein and an encircling wall portion erected thereto defining a cup-like interior;

5 as a second element, a pivot connected to the center of the flat support defining an axis;

as a third element, a rotatable knob having a top surface with indicators of periodicity marked thereon in correspondence with the tablets, a means for gripping thereby to apply rotary force, and a central bore sized
10 for encircling the pivot;

as a fourth element, a first connecting means for rotatably connecting the rotatable knob coaxially to the flat support;

as a fifth element, a means for intermittent
15 unidirectional advancement of the knob about the axis with registry corresponding to the aperture and the indicators of periodicity;

as a sixth element, a circular tablet package comprising a housing containing the tablets in a plurality
20 of frangibly lidded collapsible tablet pockets arranged circularly about the package at a radial distance corresponding to the distance of the aperture from the axis and having a central bore sized for encircling the rotatable knob;

25 as a seventh element, a means for orienting the tablet package to the flat support, whereby the first tablet is located over the aperture and misorientation of the tablet package to the flat support is inhibited; and

as an eighth element, a second connecting means for
30 connecting the tablet package to the rotatable knob upon loading onto the flat support for any initial setting of the knob such that rotary force applied to the knob is translated to the tablet package providing the manner in which the tablet package is advanced thereby causing each
35 tablet of the regimen to be presented in the designated order, accompanied with the corresponding indicator of

- 12 -

periodicity and registered by the intermittent unidirectional advancement means, to the aperture for the purpose of dispensing a single tablet at a time from the tablet dispenser by collapsing the collapsible tablet pocket positioned thereto and urging the tablet through the frangible lidding into and through the aperture.

The invention also provides a tablet package adapted for placement into the tablet dispenser system of the invention. In preferred embodiments the tablet package comprises a hole in its center and notches in its outer periphery which are shaped, sized or oriented to be placed upon a base support for the tablet package which support comprises a center knob and protruding ledges which are complementary to the hole and notches of the tablet package, respectively. Whereby, the tablet package is received onto the base support in only a single desired orientation providing a designated tablet of the tablet package over a single tablet dispensing aperture in the base support of the tablet dispenser system.

The invention also provides an intuitive tablet dispenser component kit for dispensing a regimen of solid dosage preparations in a designated sequence, comprising:

- as a first element, a container;
- as a second element, a refill carrier housing the solid dosage preparations in a circular array loaded into the container, the refill carrier presented separately upon introduction to emphasize a refillable feature;
- as a third element, a means for individually dispensing the solid dosage preparations from the refill carrier; and
- as a fourth element, a set of timing indicators, appropriate for the course of therapy and in correspondence with the solid dosage preparations in count

- 13 -

and layout, affixed to, and in registry with, the refill carrier.

Brief description of the drawings

5

Figures 1-5 and 6-13 illustrate two distinct embodiments of the present invention.

10

Figure 1 is a perspective view of a tablet dispenser incorporating the present invention with the notched skirt and tablet platform provided in a cut away view;

15

Figure 2 is a side view of the tablet dispenser in a closed position;

20

Figure 3 is a plan view of the cup like support portion of the dispenser with the tablet package provided in a cut away view;

Figure 4 is a cross-sectional view of Figure 4 with the tablet dispenser shown in a closed position;

25

Figure 5 is an exploded cross-sectional view of Figure 4 with a tablet dispenser provided as if in a closed position;

30

Figure 6 is a perspective view of a tablet dispenser incorporating the present invention in a closed position;

Figure 7 is a perspective view of the tablet dispenser in an open position with a tablet package (refill unit) positioned for loading;

35

Figure 8 is an exploded perspective view of the tablet dispenser and tablet package (refill unit);

- 14 -

Figure 9 is a cross-sectional view taken along line 9-9 of Figure 6 with the tablet dispenser shown in a closed position;

5 Figures 10 and 11 show details of the ratchet mechanism of the tablet dispenser;

10 Figure 12 is a perspective view of the tablet package (refill unit) which is adapted for insertion into the pill dispenser of the invention with a cut away view of the blister ring to show the tablet package platform;

15 Figure 13 is a perspective view of a tablet package platform upon which a blister ring containing tablets may be mounted; and

Figure 14 is a top plan view of the tablet package platform.

20

Detailed Description of the Preferred Embodiments

Reference will now be made in detail to preferred embodiments of the invention. Examples of two preferred embodiments are illustrated in the accompanying figures and described in detail below with reference to such figures and the numbers provided therein.

Referring now to Figures 1-6, a first preferred embodiment of the invention will be described in further detail. Figure 1 is a perspective view of a tablet dispenser 1 incorporating the tablet dispenser system of the present invention. The tablet dispenser 1 comprises as a first component, a substantially circular unidirectional rotatable knob 3 which is encircled with a notched skirt 9 comprising a plurality of notches 11 spaced substantially equally apart. The rotatable knob 3

06 MAR 1996

Date :.....

- 15 -

comprises a flat surface 2 and a cylindrical wall 4. A portion of the cylindrical wall 4 may be provided with ridges 94 in a knurling pattern for enhancing hand gripping of the rotatable knob 3. The rotatable knob 3 is mounted onto a second component, which is base 5 comprising a substantially flat support 6, having a single tablet dispensing aperture 13, and a rising wall 8 extending from the periphery of the flat support 6.

10 The rotatable knob 3 is attached to the flat support by engagement means around a third component which is a fixed center axis means 7 about which said rotatable knob 3 may be rotated in a circular fashion. The fixed center axis means 7 has a flat top 14 and includes an optimal pointer shaped indicator 15 which aligns with an angular ledge 17, a current or initial tablet position 97 and a corresponding day of administration 12 imprinted on the flat surface 2 of the rotatable knob 3.

20 The tablet dispenser shown in Figure 1 comprises a fourth component which is a separate and removable tablet package 19 which is adapted to fit over the rotatable knob 3 with means to positively engage the notched skirt 9 thereof such that the two components rotate in unison. 25 The separate and removable tablet package 19 comprises a rigid platform 24 and an essentially flexible blister ring 26 upon which tablets 99 are provided in collapsible tablet pockets 21. The tablet package 19 comprises a plurality of collapsible tablet pockets 21 each containing 30 a tablet 99 arranged substantially circularly about the package whereby the spacing of the tablet pockets 21 correspond to each stop of the ratchet means, whereby a new tablet 99 is placed over the tablet dispenser aperture 13 upon the positive engagement of each stop on the 35 ratcheted rotatable knob 3. The tablet pockets 21 are

- 16 -

lidded with a frangible membrane 22 (best seen in Figure 4) which is sealed to the blister ring 26 and interposed between the tablets 99 in the tablet pockets 21 and a single tablet dispensing aperture 13. A substantially rigid or stiff platform 24 comprises a plurality of tablet apertures 23 which are substantially aligned with each tablet pocket 21. A tablet 99 is dispensed from the tablet dispenser 1 by collapsing the tablet pocket 21 which is in registry with the single tablet dispensing aperture 13 thereby forcing the tablet to fracture a frangible membrane 22 and pass through the apertures 23 and 13 (as seen in Figure 4). The rigid platform 24 and the flexible blister ring 26 are held together by bonding means (e.g. glue, ultrasonic welding or staking).

15

The base 5 has a rising wall 8 extending from the flat support 6 to form a cup like interior space in which the rotatable knob 3 and tablet package 19 are housed. The base 5 comprises at least two inwardly extending ledges 16 protruding from the rising wall portion 8 toward the center axis means 7. The shape and the orientation of the ledges 16 correspond to at least two complementary recesses 18 on the tablet package 19 permitting reception of the tablet package 19 onto the flat support 6, whereby a designated first tablet 97 is positioned above the tablet dispensing aperture 13 at the initial or current tablet position 98 which is indicated by an angular ledge 17. The angular ledge 17 may be cooperative with ledges 16 by corresponding to complementary recesses 20 and 18 of the tablet package 19 to provide reception of the tablet package 19 onto the flat support 6. The tablet package 19 is interlocked onto the base 5 upon a single advance of the calendared rotatable knob 3 whereby a portion of the rigid platform 24 underlaps the inwardly extending ledges 16 and 17. The tablet package is not disengageable or

35

- 17 -

removable until a complete rotation of the knob 3 returns the tablet package 19 to the initial tablet position 98. A finger lever 32 is provided, diametrically opposite the angular ledge 17, as is more fully discussed below in the description of Figure 3.

The tablet package further comprises a cover 101 which together with the base 5 protects the dispenser contents from impact damage and light degradation particularly where the base and cover material is of such density and opacity as to filter out degradative wavelengths of light and to protect the dispenser's contents from physical damage attendant to normal use. A latch strut 103 extends toward the base 5 from the cover 101. The latch strut 103 comprises an inward hook 131 and an outward lever 132. When the cover 101 is closed onto the base 5, the latch strut 103 passes through a latch seat aperture 133 into a cavity beneath latch seat 105 thereby snapping the inward hook 131 beneath the bottom surface of the latch seat 105 and abutting the outward lever 132 to the top surface of the latch seat. The latch seat 105 is connected to the base 5 by torsion arms 134 such that latch lever 135 overhangs the base. To open the dispenser, the latch lever 135 is urged upward thereby lifting the outward lever 132 while rotating the seat aperture 133 into disengagement from the inward hook 131 resulting in the cover springing ajar.

Figure 2 is a side view of a tablet dispenser 1 in a closed position upon which the cover 101 is closed upon the base 5 over the flat support 6.

Figure 3 is a plan view of the cup like support portion of the dispenser base 5 with the blister ring 26 provided in a cut away view showing many of the components described for Figure 1 above. A notch 20 in the tablet

- 18 -

package 19 at the current dispensing tablet position 97 permits the tablet package to be placed over the angular indicating ledge 17. The top of the rotatable knob 3 is marked with the seven days of the week repeated for four weeks or 28 days of administration 12. Ratchet spring pawls 10 are shown by ghost lines on the edges of the rotatable knob 3. An optional day indicator 15 is positioned on top of fixed center axis 7 and points to the current day 12 at the current dispensing pill position 97 and aligns with the angular indicator 17.

The rotatable knob 3 has a notched skirt 9 and a flat top surface 2 connected by a cylindrical wall 4. The flat top surface 2 is imprinted with days of administration 12 of a number corresponding to the number of tablet pockets 21 and in such a way that the days align both with the tablets 99 disposed in the tablet pockets 21 and the ratchet positions (not shown). The tablet pockets 21 and tablets 99 disposed therein are sequenced such that they advance clockwise continuously without interruption. The notched skirt 9 is edged with notches 11 of a number corresponding to the pill positions and similarly co-aligned with the ratchet system and the tablets 99. Sprocket lugs 110 of the tablet package 19 are shown in engagement with notches 11 of the notched skirt 9. This engagement of sprocket lugs 110 causes the tablet package 19 to interlock and rotate in unison with the notched skirt 9 of the rotatable knob 3.

A holding lug 31 is appended to the rising wall portion 8 of the flat support 6 and overhangs the tablet package 19 when the tablet package is inserted onto the tablet dispenser 1 thereby adding a safety feature for the load position where ledges 16 and recesses 18 are in bypass alignment. The rising wall portion 8 of the flat support 6 is provided with slots 34 to allow articulation

- 19 -

of the holding lug 31 when the tablet package 19 is pressed into location. The finger lever 32 is provided to ease the removal of the tablet package.

5 Figure 4 is a cut away view taken along line 4-4 of Figure 3 with a pill package shown in a closed position. A first pair of hinge struts 140 depend from the cover and interleave with a second pair of hinge struts 140 attached to the rising wall portion 8 to form a hinge between the
10 cover and base when pin 109 is threaded into four aligned holes 108 of the two pairs of hinge struts. The cover 101 performs the function, together with base 5, of protecting the dispenser contents from impact damage and light degradation, and each is shaped in a manner to cup roughly
15 one-half of the enclosed volume. The latching means comprising strut 103 and seat 105 are in an engaged and locked position.

 Figure 5 is an exploded cut away view taken along
20 line 4-4 of Figure 3 with a tablet dispenser provided as if in a closed position. A base insert 5b, which includes center axis portion 7, is snap fitted into base unit 5a by friction jackets 51 of the base unit 5a and friction posts 53 of the base insert unit 5b. The interior portions of
25 the notches 11 of the notched skirt 9 engage two or more protruding lugs 110 of the tablet package 19, upon such engagement the tablet package 19 moves as the rotatable knob 3 moves thus rotating the tablet package 19 and the tablets 99 contained therein along their circular pathway
30 around the dispenser and sequentially deploys an individual tablet 99 over the tablet dispensing aperture 13 upon each ratchet stop of the ratcheted rotatable knob 3. The base insert 5b also contains ratchet spring-pawls 10 circularly positioned and symmetrically arrayed around
35 the axis of symmetry and tangentially inclining upward from the plane of the floor, rising in a clockwise

- 20 -

direction. An elevated structure centered on the axis of symmetry provides a fixed center axis means 7 for rotatably connecting the rotatable knob 3 by three flexible retainer struts 87 which overhang a retaining ledge 88 on the inner diameter of the rotatable knob 3. The retainer struts 87 and ledges 88 allow bypass of the rotatable knob 3 during assembly and thereafter form a rotatable assemblage.

10 The bottom of the notched skirt 9 contains a circular ratchet track 81 with clockwise tending vertical ramps 83 of a number corresponding to the number of tablet pockets 21, aligned with the days 12, the tablets 99, and the base aperture 13. The clockwise tending vertical ramps 83 ride over, depress and engage the ratchet spring-pawls of the base providing discrete positioning of the tablets 99 over the base aperture 13 and in alignment with sequential days 12 while preventing counterclockwise backoff.

20 The tablet dispenser of the invention may be operated as follows, referring to FIGS. 1 and 3: To fill the tablet dispenser 1 with the tablet package 19, the user rotates the rotatable knob 3 to align the current or desired start or initial day of the week 112 with angular ledge 17 and pointer shaped indicator 15. The user then places the tablet package 19 onto the base 5 by aligning the complementary recesses 18 of the tablet package 19 with the extending ledges 16 of the base 5 and the angular ledge 17 with the complementary recess 20 and fitting the tablet package 19 over the base 5 and the holding lug 31. The tablet package 19 is pressed over the holding lug 31 and into the base 5 to insert the tablet package 19. The sprocket lugs 110 of the tablet package 19 are thereby oriented for engagement with the notched skirt 9 for rotatable operation. After dispensing the first tablet 99, the user rotates the rotatable knob 3 so that the

specific mark 12, indicating the second day on which a tablet is to be taken, is in alignment with pointer 17 (this also aligns the tablet, corresponding with that particular day, in registry with the aperture 13 in flat support 6). When it is time to take the next tablet 99, the user presses downwardly on collapsible pocket 21 thereby urging the tablet 99 to fracture frangible membrane 22 and pass through its corresponding tablet aperture 23 in the platform 24 and then through aperture 13 in the flat support 6 for collection thereafter. The ratchet track 81 in cooperation with the pawls 10, unseen to the user, controls the rotation so that each tablet passes incrementally over and in registration with the aperture. This procedure continues until the supply of tablets is exhausted, whereupon the user merely lifts out the empty tablet package and replaces it with a new tablet package containing a full supply of tablets thus refilling the tablet dispenser.

Referring now to the Figures 6-13, a second preferred embodiment of the invention will be described in detail.

Figure 6 shows the tablet dispenser 200 in a closed position whereby a cover 202 sits atop a flat support 201.

Figure 7 shows the tablet dispenser system comprising a tablet dispenser 200 and circular tablet package 205. The tablet dispenser comprises a flat support 201, a cover 202, and a rotatable knob 203 rotatably fixed onto the flat support by pivot 204 thereby providing an axis of rotation for the rotatable knob. The cover and base are connected at hinge 206. The recitation of the hinge structure is similar to that previously described. The circular tablet package 205 contains a regimen or kit of

- 22 -

tablets or pills 207 illustrated in a count of 28 (partially shown). Upon loading, the circular tablet package connects to the rotatable knob such that torque applied to the knob rotates each tablet 207 of the circular tablet package in turn over a tablet dispensing aperture 208 located in the flat support 201 thereby providing means for a selected tablet to be expressed from the tablet dispenser.

10 In the exploded view of Figure 8, the flat support 201 is bounded by an encircling wall portion 209 erected thereon. Attached to the flat support at the center is a cylindrical wall portion 210. The pivot 204 comprises a flat surface 211 mounted onto and overlapping a
15 cylindrical stalk 212 which provides a support means. The overlap defines a bottom surface 223, best illustrated in Figure 10, which forms the base for a circular ratchet track 224. The outside diameter of the stalk 212 is of such dimension as to cause a friction fit with the
20 interior surface 247 of the cylindrical wall portion 210 when assembled thereto. An orientation means for the pivot is provided by four radial vanes 213 extending inward from the cylindrical wall portion 210 which nest within four complementary slots 214 in the base of the
25 stalk 212 when assembled. The slots are provided with lead-in chamfers 215 to guide the slots into position when assembling. A fastening means is provided by circumscribing corrugations 216 on the stalk 212 and complementarily-placed inscribing corrugations 217 on the
30 interior surface 247, the sets of opposing corrugations interlocking when the pivot 204 is pressed into the cylindrical wall portion 210 causing the sets to bypass.

The flat support encircling wall portion 209 supports
35 two rounded ledges 225 and a pointed ledge 226, all of which extend inwardly with clearance underneath. The

- 23 -

pointed ledge, positioned adjacent to the aperture 208, provides a means for indicating the position of the aperture during and after the loading of the circular tablet package 205. The encircling wall portion 209 also
5 supports a holding lug 227 attached to a slotted portion (not shown) of the wall which snaps over the tablet package 205 during loading in order to retain it thereafter. The holding lug 227 has a ledge portion 228, best shown in Figure 9, serving the function of holding
10 the tablet package in place on the flat support, and an inclined plane portion (not shown) providing a means for levering the structure aside during loading. The outside surface of the encircling wall portion 209 contains a latch recess 229, positioned at a point diametrically
15 opposite the hinge 206, which works in cooperation with a latch lug 230 in the cover, best shown in Figure 9, to provide a latching means when the tablet dispenser is closed.

20 The rotatable knob 203 has a top surface 248 supported by an exterior cylindrical wall 249 and has a central bore 218. The central bore is of sufficient dimension to surround the pivot stalk 212 when the pivot flat top surface 211 is nested within recess 246 which is
25 bounded by an interior cylindrical wall 219 extending downward from the inside diameter of the top surface 216. Extending inward from the bottom edge of the interior cylindrical wall, defining the floor of the recess 246, are four spring pawls 220. The spring pawls comprise four
30 arcuately-arrayed spring arms 221 which terminate in four ratchet pawls 222 which, in turn, provide a cantilevered upward bias by the spring arms from base points lying on a common circle corresponding to the ratchet track 224 (see Figure 10). When the pivot 204 is seated in the
35 cylindrical wall portion 210 of the flat support 201 passing through the central bore 218 of the rotatable knob

- 24 -

203, thereby providing connecting means with the flat support, the ratchet pawls 222 close with the ratchet track 224, thereby forming a means for intermittent unidirectional advancement of the rotatable knob. The pawls and track have a rest position, as best shown in Figure 11, defining a ratchet stop. The sliding face 232 of the pawl provides for clockwise advancement of the rotatable knob 203 and the abutting face 223 limits counterclockwise motion. The number of ratchet stops corresponds to the number of tablets 207 in the regimen. The ratchet stops are in fixed alignment with the flat support 201 and, in particular, with the dispensing aperture 208, by means of the radial vanes 213. The interposition of componentry is best shown in the cut-away view of Figure 9.

A notched skirt 231 extends outward from the bottom edge of the exterior cylindrical wall 249. The notches also correspond to the number of tablets 207 of the tablet package 205 and are in registry, linked by the spring pawls 220, with the stops on the ratchet track 224 (Figure 10) and, associatively, with the dispensing aperture 208. Indicators of periodicity 251, such as days of the week, are printed or engraved onto the top of the flat surface 248 of the rotatable knob 203, also in registry with the ratchet track stops. An indicator mark 233 is similarly printed or engraved onto the flat surface 211 of the pivot 204 in fixed registry with the dispensing aperture 208, providing, in cooperation with the indicators of periodicity, a means for indicating by name (e.g. day of week) the ratchet position corresponding to the aperture. Knurls 234 are formed into the top outside edge of the rotatable knob 203 thereby providing a means for gripping when torque is applied to the knob by hand.

- 25 -

The circular tablet package 205 comprises a tablet housing 235 and a rigid skeletal structure 236. The tablet housing contains the tablets 207 between a layer of flexible material having collapsible tablet pockets 237, such as thermoformed PVC film, and a frangible lidding, such as aluminum foil, sealed underneath. The tablet housing 235 is shaped like a donut and is perforated with two pilot holes 238 adjacent the inside diameter. During assembly, the pilot holes are threaded over posts 239 attached to lugs 240 on the rigid skeletal structure 236. The posts are then headed over in rivet fashion thereby unitizing the rigid skeletal structure with the tablet housing 235 to form the complete tablet package 205. After use, the spent tablet housing can be stripped from the rigid skeletal structure for the purpose of recycling materials by pulling the tablet housing away from the rigid skeletal structure thus rupturing the connecting structure of the lugs 240 at the fragile necks 241, which are otherwise robust when remaining combined with the tablet housing 235. The rigid skeletal structure 236 has apertures 242 of a number corresponding to the number of tablets, and arrayed so as to fall beneath each of the collapsible tablet pockets 237 of the tablet housing 235 when oriented thereto by the pilot holes 238. A tablet 207 is dispensed by applying finger pressure to a collapsible tablet pocket thereby urging the tablet 207 through the frangible film and the supporting aperture.

The circular tablet package 205 is provided with two rounded cut-aways 243 and a pointed cut-away 244 complementary in size, shape, and layout, respectively, to the rounded ledges 225 and the pointed ledge 226 appended to the flat support 201. The pointed cut-away 244 corresponds to a designated first tablet of the regimen. The cut-aways 243 and 244, in cooperation with the ledges 225 and 226, permit loading of the circular tablet package

- 26 -

205 into the tablet dispenser 200 in only one initial orientation thereby furnishing a designated first tablet at the dispensing aperture 208 for initial dispensing. A connecting means is provided by the lugs 240 of the rigid skeletal structure 236 which are complementarily shaped to interlock with the notched skirt 231 of the rotatable knob 203. Upon advancement of the next tablet to the aperture 208 by rotation of the rotatable knob, the periphery rail 245 of the rigid skeletal structure 236 underpasses the ledges 225 and 226 by traversing the clearance underneath thereby locking the circular tablet package 205 within the tablet dispenser 200. Because the layout or geometry of the cut-aways and ledges permits a match at only the loading position, the locking arrangement is maintained until the advancement completes a circle back to the initial position. The circular tablet package 205 can then be removed, and the tablet dispenser 200 can be refilled with a fresh tablet load via a new tablet package.

20

Figure 12 is a perspective view of the tablet package (refill unit) which is adapted for insertion into the pill dispenser of the invention with a cut away view of the blister ring to show the tablet package platform.

25

Figures 13 and 14 are perspective views of a tablet package platform upon which a blister ring containing tablets may be mounted. The substantially circular platform comprises a rigid skeletal structure 236 having posts 239 on the inside diameter which are attached to lugs 240. The lugs 240 are connected to the rigid skeletal structure 236 by means of fragile necks 241. The rigid skeletal structure 236 has apertures 242 for passage of tablets and cutaways or notches 243 and 244 which are adapted to correspond to ledges in the tablet dispenser

35

- 27 -

for positive and correct placement of the tablet package into the tablet dispenser system.

5 While the material for the elements of the tablet dispenser are generally left to choice and compatibility with the functions of the dispenser, the rotatable knob, the center axis means, the support base, rigid platform and cover are preferably made of plastic. Plastic materials such as general purpose polystyrene are
10 conveniently injection molded into the desired configurations, while providing sufficient rigidity and durability for continual, frequent and repeated use of the dispenser. The cover, base, and calendar components may be injection molded in high impact polystyrene (HIPS).
15 The days of the week are imprinted onto the top calendar surface, and the indicator mark 15 is similarly highlighted by imprinting. The method of imprinting is either by hot stamping or by pad printing. These three components may be preassembled and supplied as a unit. As
20 alluded to briefly above, the tablet package blister pack 19 has collapsible pockets made from plastic, and inasmuch as they contain the tablets, it is preferable that the dispenser be sufficiently compact to fit in the palm of the user's hand. Typically, the diameter of the circular
25 platform which has twenty-eight (28) openings therein is about 3.0 inches (7.6 cm.), while the support is slightly larger.

The refill composite consists of a platform
30 injection-molded in medium impact polystyrene (MIPS) and a blister unit containing the pills. The platform and blister are bonded together in a fixed orientation. The blister may comprise polyvinyl chloride (PVC) film which is thermoformed into cavities to receive the tablets or
35 pills before laminating the aluminum foil lidding, and

- 28 -

subsequently die-cutting the laminate from the web, according to well-known manufacturing processes.

Thus there has been provided a tablet dispenser for dispensing tablets or similar solid-form pharmaceutical preparations according to a time related regimen whereby the user thereof is plainly informed when the tablet should be taken thereby eliminating the uncertainty and confusion which may often accompany the taking of such pharmaceutical preparations and following of prescribed dosage regimens.

The scope of the present invention is not limited by the description, examples and suggested uses herein and modifications can be made without departing from the intended scope and spirit of the invention. For example, other components may be added to the dispenser including additional locking mechanisms for making the package more child or tamper resistant or additional aesthetic features including embossing or coloring of the package. The dispenser may also be easily adapted to different languages or days of periodicity of dosage by application of an adhesive label over the calendared knob. The dispenser may be further adopted for twice daily pharmaceutical regimens by providing a.m. or p.m. markings in addition to the days of the week. Further, the ledges on the tablet dispenser base and notches on the tablet package may be interchanged by providing an extended cavity in the base to accept a notched tablet package therein. The present invention may also be used to provide a dispenser for vitamins, minerals or other nutrients.

- 29 -

As illustrated above, application of the dispenser of the present invention for medical and pharmaceutical uses can be accomplished by any clinical, medical and pharmaceutical methods and techniques as are presently and prospectively known to those skilled in the art. Thus it is intended that the present invention cover the modifications and variations of this invention provided that they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A tablet dispenser component system comprising:

5 as a first component a rotatable substantially
circular unidirectional knob having indicators of
periodicity thereon wherein the rotatable knob is
encircled with a notched skirt comprising a plurality of
notches spaced substantially equally apart, said rotatable
10 knob having unidirectional ratchet means comprising a
ratchet track with a plurality of ratchet stops whereby
each positive engagement of said ratchet stops corresponds
to a single space of each notch of the notched skirt;

as a second component a substantially flat support
having a single tablet dispensing aperture therein and a
15 rising wall portion protruding therefrom to form an
interior cup portion thereon, a first engagement means
whereby said rotatable knob is rotatably joined to said
flat support, a fixed center axis means around which said
rotatable knob is rotated in a circular fashion, and a
20 second engagement means interposed with said
unidirectional ratchet means forming a functional system
therewith; and

a third component which is a separate and removable
tablet package adapted to fit over the rotatable knob with
25 means to positively engage the notched skirt such that the
two components rotate in unison, said tablet package
comprising a plurality of collapsible tablet pockets each
containing a tablet arranged substantially circularly
about the package whereby the spacing of the tablet
30 pockets corresponds to each stop of the ratchet means
whereby a new tablet is placed over the tablet dispensing
aperture upon the positive engagement of each stop on the
ratcheted rotatable knob, said tablet pockets being
covered with a frangible membrane which is interposed
35 between said pockets and the single tablet dispensing
aperture of the support, whereby a tablet is dispensed





- 31 -

from the package by collapsing the pocket which is in registry with said aperture thereby urging said tablet to fracture said membrane and pass through said aperture.

5 2. The tablet dispenser system of claim 1 wherein the substantially flat support and interior cup portion formed thereon by wall portions rising therefrom is provided with means for supporting the tablet package in a substantially circular path around the fixed center axis and rotatable
10 knob and for interlocking the tablet package in place upon engagement of a first stop of the unidirectional ratcheted and rotatable knob, whereby the tablet package is removable from the support means upon completion of a full rotation of the ratcheted and rotatable knob.

15

3. The tablet dispenser system of claim 2 wherein the rotatable knob comprises a calendared ring which is unidirectionally rotatable in a clockwise direction about the fixed center axis and the notched skirt is attached to
20 the periphery of the rotatable knob.

4. The tablet dispenser system of claim 3 wherein the fixed center axis has an indicator mark aligned with the single tablet dispensing aperture of the flat support
25 component.

5. The tablet dispenser system of claim 1 wherein the means to positively engage the notched skirt comprises at least two complementary projections to positively engage
30 at least two notches in the notched skirt when fitted over the rotatable knob.

6. The tablet dispenser system of claim 1 wherein the collapsible tablet pockets are formed to accommodate
35 tablets of substantially circular, non-circular or caplet-like shape.





7. The tablet dispenser system of claim 1 wherein the substantially flat support is adapted for receiving and interlocking the tablet package by the provision of at least two inward extending ledges protruding from the rising wall portion, whereby the shape and orientation of said ledges correspond to at least two complementary recesses on the tablet packages permitting reception of said tablet package onto the flat support in a single initial position of tablet orientation about the flat support whereby a designated tablet is positioned above the tablet dispensing aperture at the initial tablet position and the tablet package is interlocked upon a single advance of the calendared rotatable knob by overlap with said ledges; whereby said tablet package is not disengageable or removable until a complete rotation of the knob returns the tablet package to the initial tablet position.

8. The tablet dispenser system of claim 7 whereby the inward extending ledges are spatially arrayed to inhibit the receipt of the package on the substantially flat support and the disengagement, discharge or removal of the tablet package from the substantially flat support at any position other than the initial tablet position.

9. The tablet dispenser system of claim 7 whereby the inward extending ledges are shaped or sized to receive or disengage with the complementary notched tablet package only at the initial tablet position.





- 33 -

10. The tablet dispenser system of claim 1 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support upon each advance of the positively engaging stop of the rotatable knob.

11. The tablet dispenser system of claim 1 wherein the calendared rotatable knob is provided with periodicity means consisting of days of the week in at least one set of seven images on the rotatable knob such that there is an ordered one-to-one correspondence of days with ratchet stops and such that any setting of the knob in relation to the indicator mark constitutes a predisposed start day setting for the package.

12. The tablet dispenser system of claim 8 wherein the spacial array of the inward extending ledges is asymmetrical.

13. The tablet dispenser system of claim 7 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support upon each advance of the positively engaging stop of the rotatable knob.





14. The tablet dispenser system of claim 8 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support portion upon each advance of the positively engaging stop of the rotatable knob.

15. The tablet dispenser system of claim 9 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support portion upon each advance of the positively engaging stop of the rotatable knob.

16. The tablet dispenser system of claim 1 further comprising a lid portion to provide an enclosed compact package.

17. The tablet dispenser system of claim 16 wherein the lid and support comprise interlocking means for engaging the compact package in a closed position.

18. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 1 and oral contraceptive tablets.





19. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 2 and oral contraceptive tablets.
- 5 20. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 7 and oral contraceptive tablets.
- 10 21. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 10 and oral contraceptive tablets.
- 15 22. A method of administering a prescribed regimen of tablet medication comprising the utilization of the tablet dispenser system of claim 10 in which the tablets deployed therein, and the orientation of the days of the week to each tablet position, are adapted to a prescribed regimen.
- 20 23. The method of claim 22 wherein the prescribed regimen provides oral contraceptive or hormone replacement therapy.
- 25 24. A tablet package adapted for receipt and use in the tablet dispenser system of claim 1.
- 30 25. A tablet package adapted for receipt and use in the tablet dispenser system of claim 7.
- 35 26. A method of filling the tablet dispenser system of claim 7 comprising the steps of aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support and thereafter placing said tablet package onto the substantially flat support.





27. A method of filling the tablet dispenser system of claim 8 comprising the steps of aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support and thereafter placing said tablet package onto the substantially flat support.

28. A method of filling the tablet dispenser system of claim 9 comprising the step of aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support and thereafter placing said tablet package onto the substantially flat support.

29. A method of filling the tablet dispenser system of claim 13 comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position; aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support, and placing said tablet package onto the substantially flat support.

30. A method of filling the tablet dispenser system of claim 14 comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position, aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support, and placing said tablet package onto the substantially flat support.





- 37 -

31. A method of filling the tablet dispenser system of claim 15 comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position, aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support, and placing said tablet package onto the substantially flat support.

10

32. The filling method of claim 28 further comprising the subsequent steps of dispensing the initial tablet located at the initial tablet position and rotating the rotatable knob one stop to the next day in order to positively engage the tablet package in the tablet dispenser, thereby inhibiting disengagement of the package until a full rotation of the rotatable knob has been completed.

15

33. A tablet dispenser component system comprising:
a circular tablet package comprising a plurality of sequentially arranged collapsible tablet pockets each containing a tablet arranged substantially circularly about the package and at least two asymmetrically spaced notches about either the inner or outer periphery of the ringed circular package;

20

25

a base support comprising a single tablet dispenser aperture therein and at least two ledges which are shaped, sized, or oriented to receive the tablet package in only one position of positive engagement thereon whereby a designated tablet of the tablet package is provided over the single tablet dispensing aperture;

30

means for rotating the circular tablet package about the base support around a center axis portion of the base support to locate tablets in the sequentially arranged

35





- 38 -

tablet pockets of the tablet package over the tablet dispensing aperture for dispensing therefrom; and

5 means for positively engaging the tablet package onto the base support upon the initial dispensing of a tablet from the tablet package and subsequent rotation of the tablet package causing the next sequentially arranged tablet pocket to be positioned over the tablet dispensing aperture.

10 34. A tablet package adapted for placement into the tablet dispenser system of claim 33 by the inclusion of notches in the tablet package which correspond to ledges of the base support.

15 35. The tablet dispenser of claim 33 wherein two spaced notches of the tablet package are asymmetrically spaced.

20 36. A tablet package adapted to be provided into the tablet dispenser system of claim 33 by the inclusion of at least two notches which are oriented asymmetrically to each other and at least two ledges of the base support which are complementary spaced in relation to the notches.

25 37. A circular tablet package adapted for loading into a tablet dispenser system wherein the tablet package comprises a hole in its center and notches in its outer periphery which are shaped, sized or oriented to be placed upon a base support of the tablet dispenser system which support comprises a center knob and protruding ledges
30 which are complementary to the hole and notches of the tablet package, respectively, whereby the tablet package is received onto the base support of the tablet dispenser system in only a single desired orientation providing a designated tablet of the tablet package over a single
35 tablet dispensing aperture in the base support of the tablet dispenser system.





38. The circular tablet package of claim 37 wherein the notches of the tablet package are asymmetrically spaced to complement asymmetrically spaced ledges on the base support of the tablet dispenser system.

5

39. The circular tablet package of claim 37 further comprising lugs inwardly protruding from the periphery of the center hole to engage a complementily notched skirt on the center knob of the base support of a tablet dispenser system.

10

40. A tablet dispenser system for dispensing a regimen of tablets in a designated sequence comprising:

as a first element, a flat support having a single tablet dispensing aperture therein and an encircling wall portion erected thereto defining a cup-like interior;

15

as a second element, a pivot connected to the center of the flat support defining an axis;

as a third element a rotatable knob having a top surface with indicators of periodicity marked thereon in correspondence with the tablets, a means for gripping thereby to apply rotary force, and a central bore, sized for encircling the pivot;

20

as a fourth element, a first connecting means for rotatably connecting the rotatable knob coaxially to the flat support;

25

as a fifth element, a means for intermittent unidirectional advancement of the knob about the axis with registry corresponding to the aperture and the indicators of periodicity;

30

as a sixth element, a circular tablet package comprising a housing containing the tablets in a plurality of frangibly lidded collapsible tablet pockets arranged circularly about the package at a radial distance corresponding to the distance of the aperture from the

35



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date 06 MAR 1996

- 40 -

axis and having a central bore sized for encircling the rotatable knob;

5 as a seventh element, a means for orienting the tablet package to the flat support whereby the first tablet is located over the aperture and misorientation of the tablet package to the flat support is prevented; and

10 as a eighth element, a second connecting means for connecting the tablet package to the rotatable knob upon loading onto the flat support for any initial setting of the knob such that rotary force applied to the knob is translated to the tablet package providing the manner in which the tablet package is advanced thereby causing each tablet of the regimen to be presented in the designated order, accompanied with the corresponding indicator of
15 periodicity and registered by the intermittent unidirectional advancement means, to the aperture for the purpose of dispensing a single tablet at a time from the tablet dispenser by collapsing the collapsible tablet pocket positioned thereto and urging the tablet through
20 the frangible lidding into and through the aperture.

41. The tablet dispenser of claim 40 comprising as an additional element a means for indicating the location of the aperture remaining visible after loading the tablet
25 package thereby providing a fixed registry point.

42. The tablet dispenser system of claim 40 further comprising a means for retaining the tablet package onto the flat support and in continuous connection with the
30 rotatable knob.

43. The tablet dispenser system of claim 40 further comprising a cover which encloses the tablet dispenser.





- 41 -

44. The tablet dispenser system of claim 43 wherein the cover is hinged to the flat support and secured in a closed position by a latch means.

5 45. The tablet dispenser system of claim 41 wherein the pivot comprises a stationary flat surface elevated above the flat support by a support means projecting through a through-bore of the rotatable knob after assembly thereto.

10 46. The tablet dispenser system of claim 45 wherein the support means comprises a stalk having means for orienting the pivot stationary flat surface to the flat support, and thereby to the indicating means, and further having means for fastening the stalk rigidly to the flat support.

15 47. The tablet dispenser system of claim 46 wherein the means for fastening the stalk comprises a cylindrical wall portion, attached to the flat support at its center and contained within the bore of the rotatable knob when
20 assembled thereto, for receiving the pivot stalk with a friction fit to the interior surface of the cylindrical wall.

25 48. The tablet dispenser system of claim 47 wherein the means for orienting the stalk comprises a plurality of radial vanes extending inward from the cylindrical wall portion wherein said vanes nest within complementary slots in the base of the stalk when assembled thereto.

30

35





- 42 -

49. The tablet dispenser system of claim 46 wherein the first connecting means comprises an overlap of a pivot stationary flat surface bottom surface and a plurality of clockwise-tending spring pawls based at the bottom of a second interior cylindrical wall spacing the spring pawls beneath the inner edge of the top surface of the rotatable knob, thereby forming a recess, the second interior cylindrical wall closely encircling the pivot stationary flat surface interposed in the recess and positioned relative thereto in assembly by an essentially cylindrical exterior wall elevating the top surface to a point of contact between the spring pawls and the pivot stationary flat surface when bottomed on the flat support.

15

50. The tablet dispenser system of claim 49 wherein the means for intermittent unidirectional advancement of the rotatable knob comprises the plurality of clockwise-tending spring pawls cantilevered for an upward bias and arrayed to match a circular clockwise-tending ratchet track formed into the pivot stationary flat surface bottom surface, with ridge and recess geometry of a conventional design and in registry with the indicators of periodicity and the indicating means, the interaction of components such that the spring pawls are urged downward by the rotation of the ratchet track over sliding face surfaces of the spring pawls, the spring pawls subsequently clearing the ridges and springing back into the recesses of the ratchet track thus simultaneously interrupting the rotation, positively locating the rotatable knob, and locking against counterclockwise thrust through interference of abutting face surfaces of the spring pawls and ratchet track ridges.

35





- 43 -

51. The tablet dispenser system of claim 50 wherein the method of assembling the flat support, the rotatable knob and the pivot comprises the steps of placing the rotatable knob over the center of the flat support, orienting the pivot to the flat support with the pivot orienting means, and connecting the pivot to the flat support with the pivot fastening means while coaxially inserting the pivot stationary flat surface into the recess formed by the second interior cylindrical wall of the rotatable knob, overlapping the spring pawls and interposing the spring pawls and ratchet track for cooperation therebetween.

52. The tablet dispenser system of claim 45 wherein the indicating means comprises a mark placed on the stationary flat surface of the pivot at the aperture position thereby facilitating visual alignment with the indicator of periodicity corresponding to the aperture position.

53. The tablet dispenser system of claim 41 wherein the means for orienting the tablet package comprises a plurality of ledges extending inwardly from the encircling wall portion of the flat support coupled with cut-aways on the periphery of the tablet package, complementary with the ledges in geometry and location, the ledges having underclearance for the rotation of the tablet package thereunder and spaced sufficiently apart to frustrate loading by angling the periphery underneath the ledges without proper alignment with the cut-aways, the periphery having sufficient stiffness to prevent forceable entry of the tablet package to the flat support without alignment of the ledges and cut-aways, the proper alignment of features thereby permitting receipt of the tablet package onto the flat support, the bypass of ledges and cut-aways occurring in no other than the preferred tablet orientation as a result of means for uniquely matching ledge and cut-away pairs.





- 44 -

54. The tablet dispenser system of claim 53 wherein the periphery is stiffened by stiffening means comprising a rigid skeletal structure underlaying the tablet housing with apertures appropriately positioned to allow for the discharge of tablets through the underlayer, the skeletal structure fixed by bonding means to the tablet housing.

55. The tablet dispenser system of claim 54 wherein the bonding means comprises a plurality of posts erected from the skeletal structure and inserted through pilot holes provided in the tablet housing and subsequently headed over in rivet fashion for securing the assembly therewith.

56. The tablet dispenser system of claim 53 wherein the means for uniquely matching ledge and cut-away pairs comprises differing shapes for the ledge and cut-away pairs such that only one orientation results in a match.

57. The tablet dispenser system of claim 53 wherein the means for uniquely matching ledge and cut-away pairs comprises differing sizes for the ledge and cut-away pairs such that only one orientation results in a match.

58. The tablet dispenser system of claim 53 wherein the means for uniquely matching ledge and cut-away pairs comprises an asymmetrical spatial array of pairs such that only one orientation results in a match.

59. The tablet dispenser of claim 53 wherein a second indicating means comprises one of the ledges located adjacent to the aperture which is uniquely shaped like a pointer.



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date 06 MAR 1996

- 45 -

- 5 60. The tablet dispenser of claim 40 wherein the second connecting means comprises a notched skirt extending outward from the base of the rotatable knob with identical notches in registry with the intermittent unidirectional advancement means and at least one complementarily shaped lug on the tablet package which is positioned for interlocking with a corresponding notch when assembled thereto.
- 10 61. The tablet dispenser of claim 60 wherein the lugs and notches are reversed with respect to the rotatable knob and the tablet package.
- 15 62. The tablet dispenser of claim 60 wherein only two diametrically opposed lugs are used to assure firm connection with the notched skirt while providing ease of assembly.
- 20 63. The tablet dispenser of claim 62 wherein the lugs are weakly attached by fragile necks to a rigid skeletal structure underlaying the tablet housing and bonded by posts joined to the lugs and headed over in rivet-fashion after insertion through the complementary pilot holes in the tablet housing, thereby forming a robust composite,
- 25 the weak attachment being such that the removal of the spent tablet housing material ruptures the fragile necks through force applied at the post heads, thereby providing separation of materials for recycling and preventing unauthorized use of the skeletal structure.
- 30 64. The tablet dispenser system of claim 42 wherein the retaining means comprises a plurality of ledges extending inward with underclearance from the encircling wall portion of the flat support, the ledges matched to
- 35 complementary cut-aways on the periphery of the tablet package thereby providing unique orientation during



* C L N S *



- 46 -

assembly, the ledges further overlapping the tablet package periphery for each position of the intermittent unidirectional advancement means other than the initial position, the ledges supplemented by a holding lug
5 extending from a slotted portion of the encircling wall portion of the flat support, the slots useful for providing spring-like flexibility to the intervening wall structure, the holding lug having a ledge portion overlapping the tablet dispenser periphery for every
10 position of the unidirectional advancement means and an inclined plane portion angled, during assembly, against the tablet package periphery such that downward force applied to the periphery flexes the slotted wall portion thereby allowing bypass of the tablet package and the
15 holding lug, the spring-back of the slotted wall portion providing a tactile confirmation of the seating of the tablet package onto the flat support and in positive interlock with the rotatable knob.

20 65. The tablet dispenser system of claim 64 wherein the method of disengagement and removal of the tablet package from the tablet dispenser comprises the steps of indexing the rotatable knob to the initial position and lifting the tablet package from a location opposite the holding lug
25 thereby clearing the ledges and pivoting over the lug into disengagement from the dispenser.

30 66. The tablet dispenser system of claim 40 wherein the tablet package after use is removed and replenished with a fresh tablet package providing thereby for a reusable dispenser, extendable in use, through multiple refill replenishments.



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date 06 MAR 1996

- 47 -

67. The tablet dispenser of claim 40 wherein the collapsible tablet pockets are formed to accommodate various shapes and sizes of tablets postured either on a surface or on edge.

5

68. The tablet dispenser of claim 41 wherein the indicators of periodicity are days of the week.

69. The tablet dispenser of claim 68 wherein the method for loading with selection of a preferred starting day comprises the steps of removing any previously loaded tablet package, rotating the rotatable knob until the desired day is aligned with the indicating means and loading the tablet package onto the flat support with registry of the designated first tablet to the desired day.

10
15

70. The tablet dispenser of claim 40 wherein the gripping means comprises an edge formed by the intersection of the top surface with an essentially cylindrical exterior wall which elevates the edge to an accessible height.

20

71. The tablet dispenser of claim 70 wherein the edge is knurled to facilitate hand gripping.

25

72. An intuitive tablet dispenser kit for dispensing a regimen of solid dosage preparations in a designated sequence comprising:

as a first element, a container;

30

as a second element, a refill carrier housing the solid dosage preparations in a circular array loaded into the container, the refill carrier presented separately upon introduction to emphasize a refillable feature;

35

as a third element, a means for individually dispensing the solid dosage preparations from the refill carrier; and



* C L N S *

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date : 0 6 MAR 1996

- 48 -

5 as a fourth element, a set of timing indicators,
appropriate for the course of therapy and in
correspondence with the solid dosage preparations in count
and layout, affixed to, and in registry with, the refill
carrier.

10 73. The intuitive tablet dispenser kit of claim 72
further comprising literature or labeling for informing
and instructing the patient, the physician or the
pharmacist as to the use of the tablet dispenser kit.

74. The intuitive tablet dispenser kit of claim 72
wherein a plurality of refill carriers are provided.



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date: 06 MAR 1996

THIS SHEET HAS BEEN
REPLACED

FIG-1

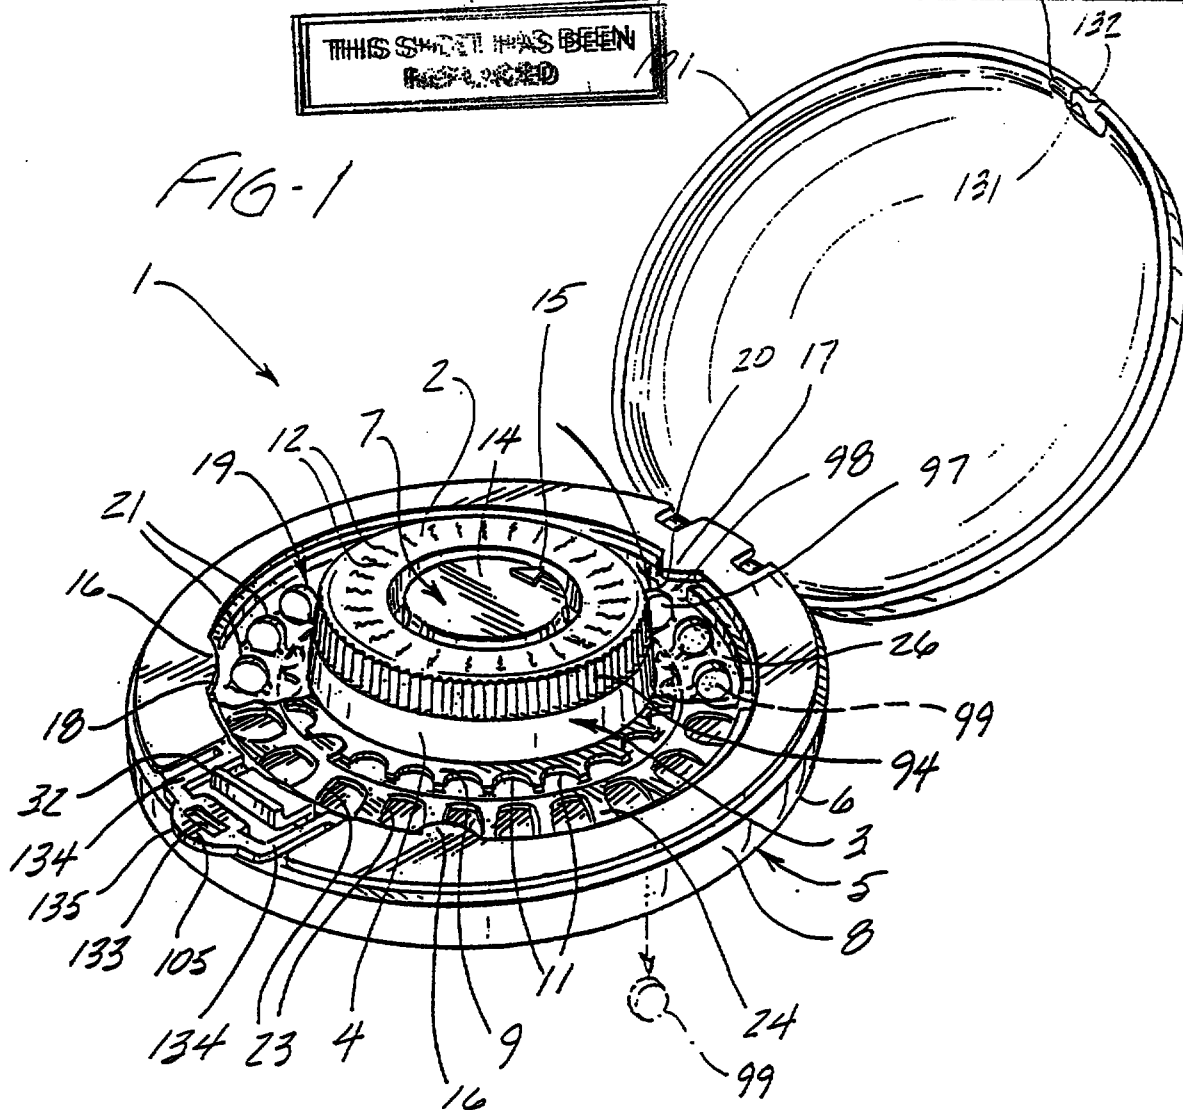
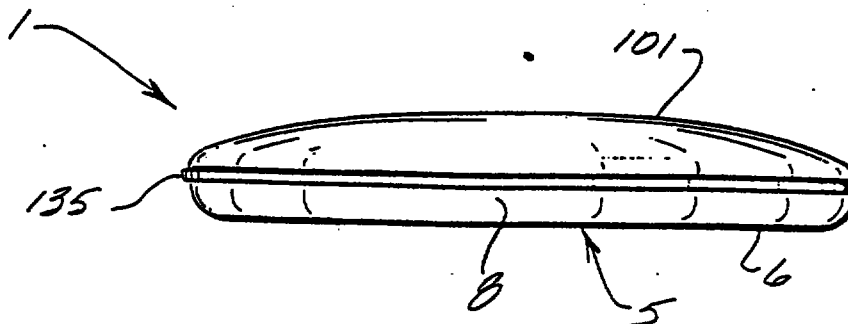
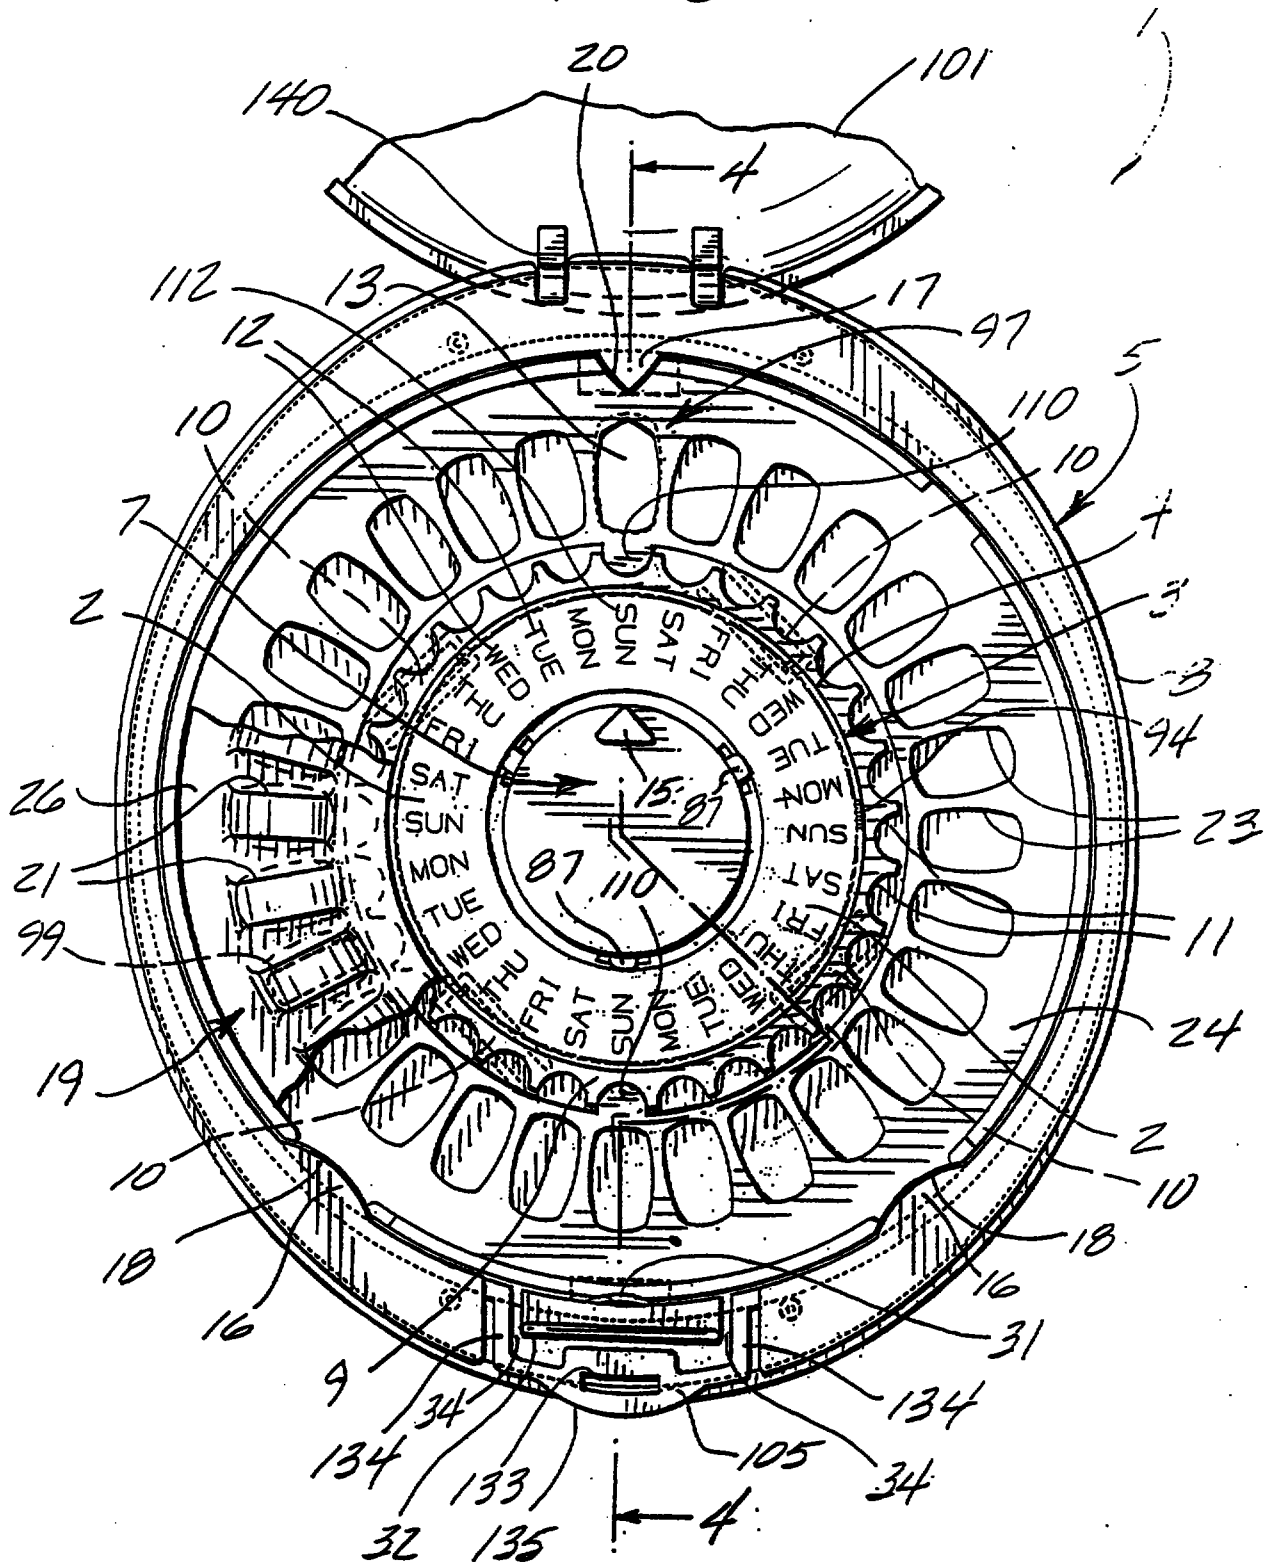


FIG-2



This Sheet Has Been Replaced



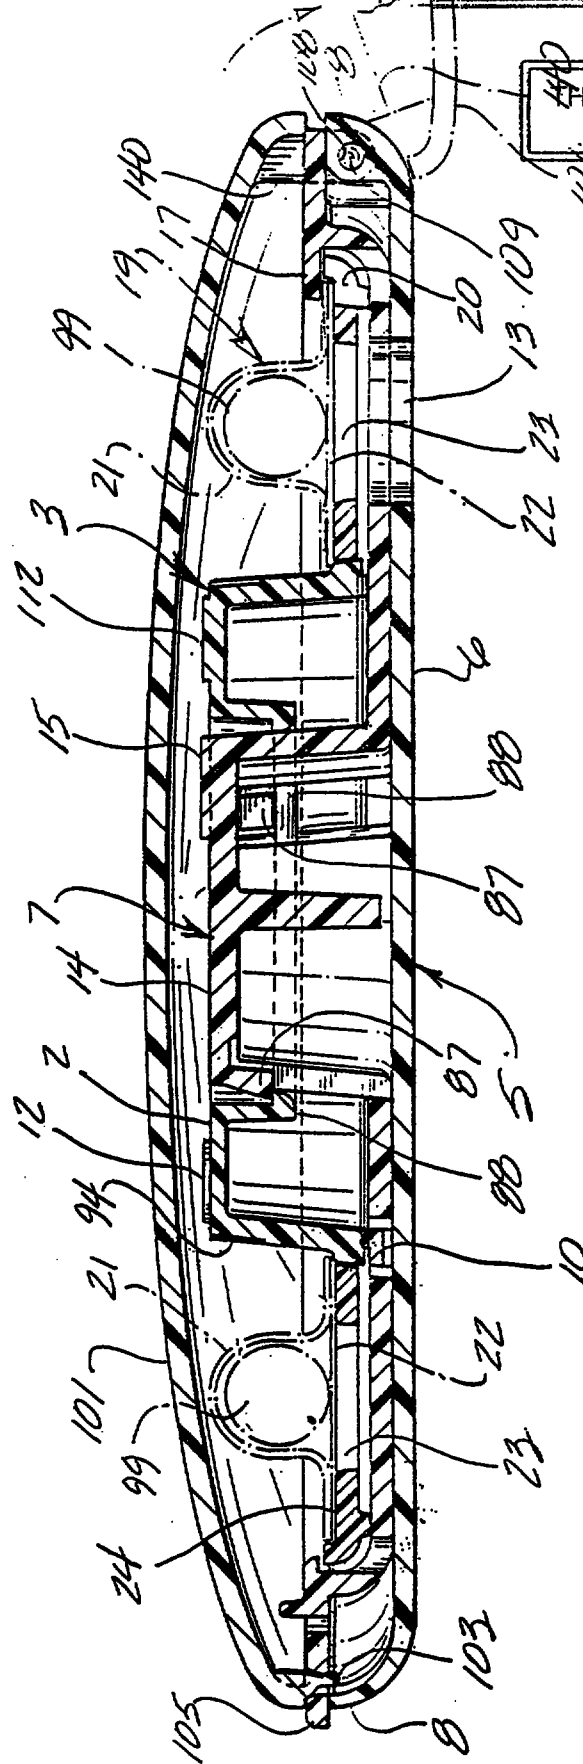


THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET
Date: 06 MAR 1996

THIS SHEET HAS BEEN
REPLACED

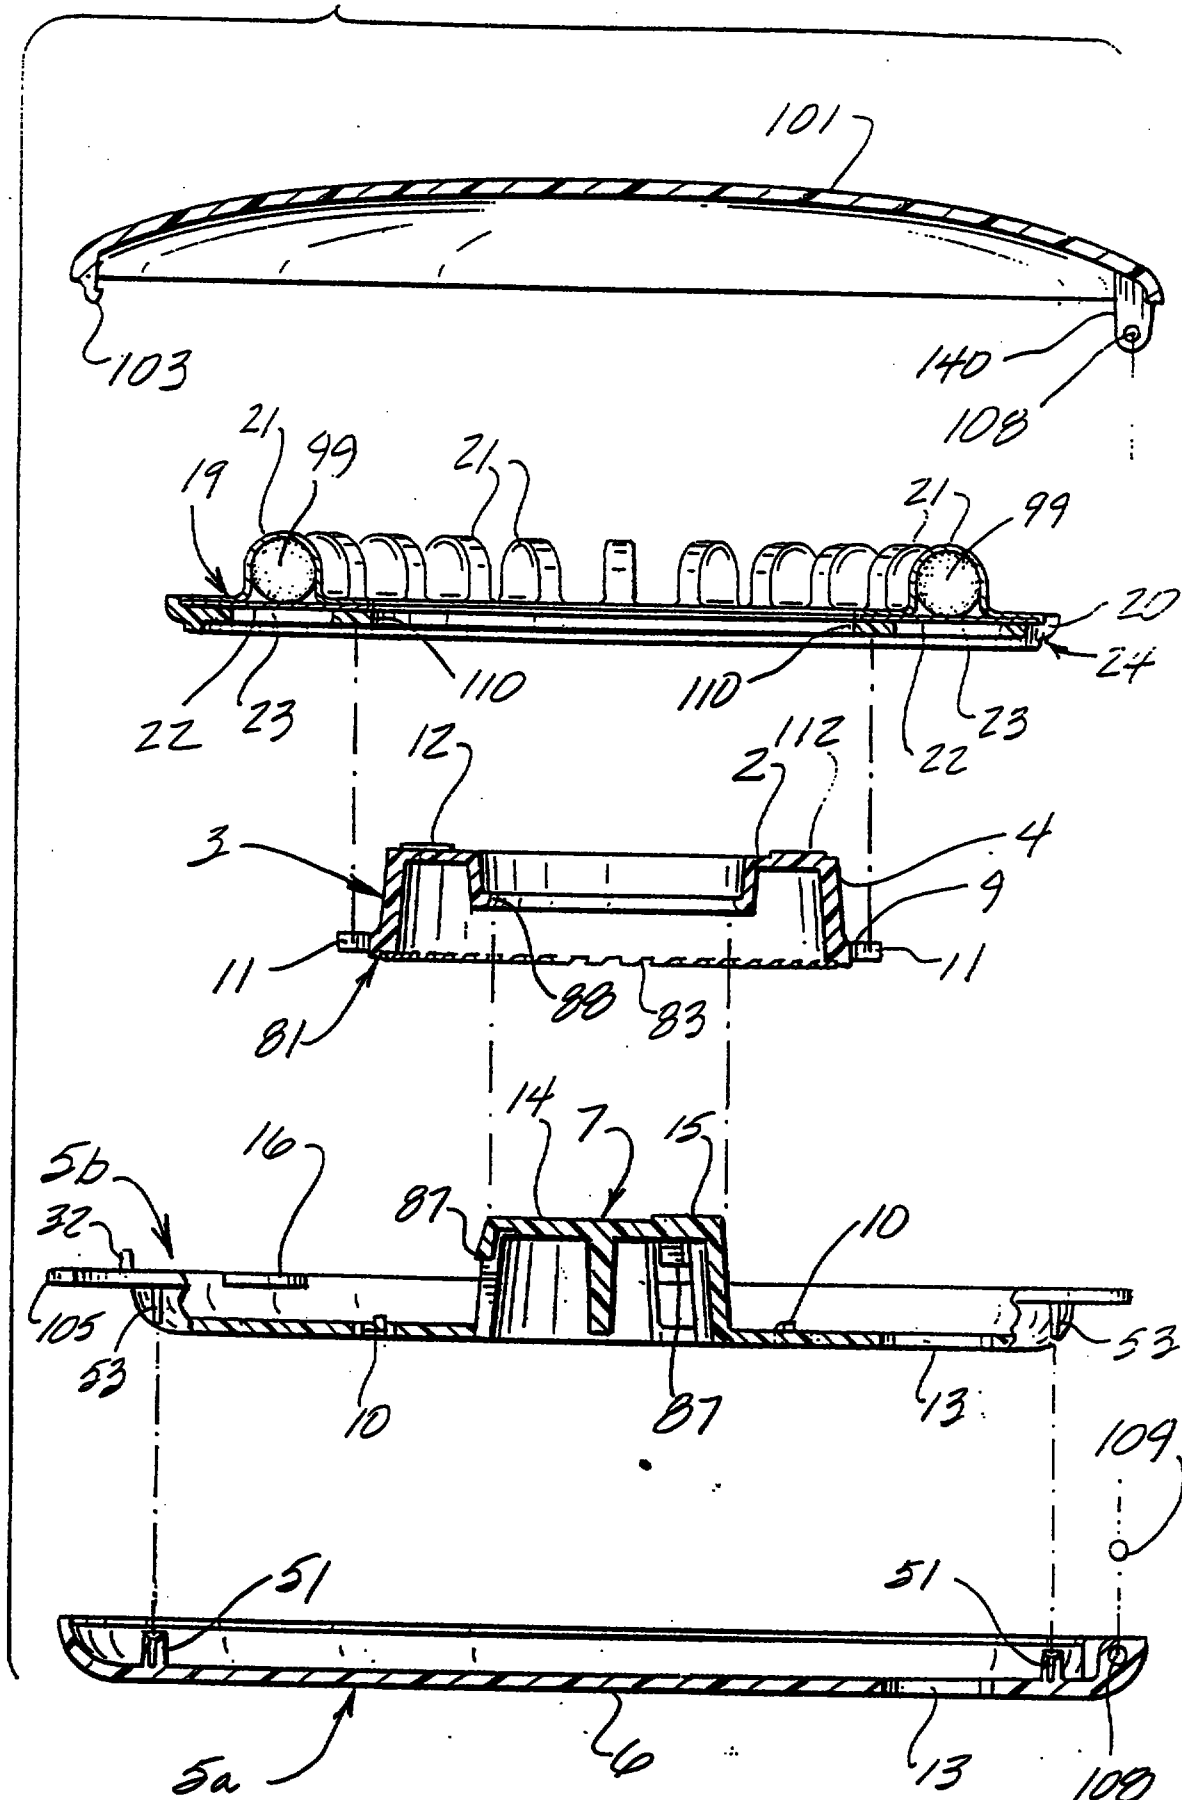
FIG-4



This Sheet Has Been Replaced



FIG-5



5

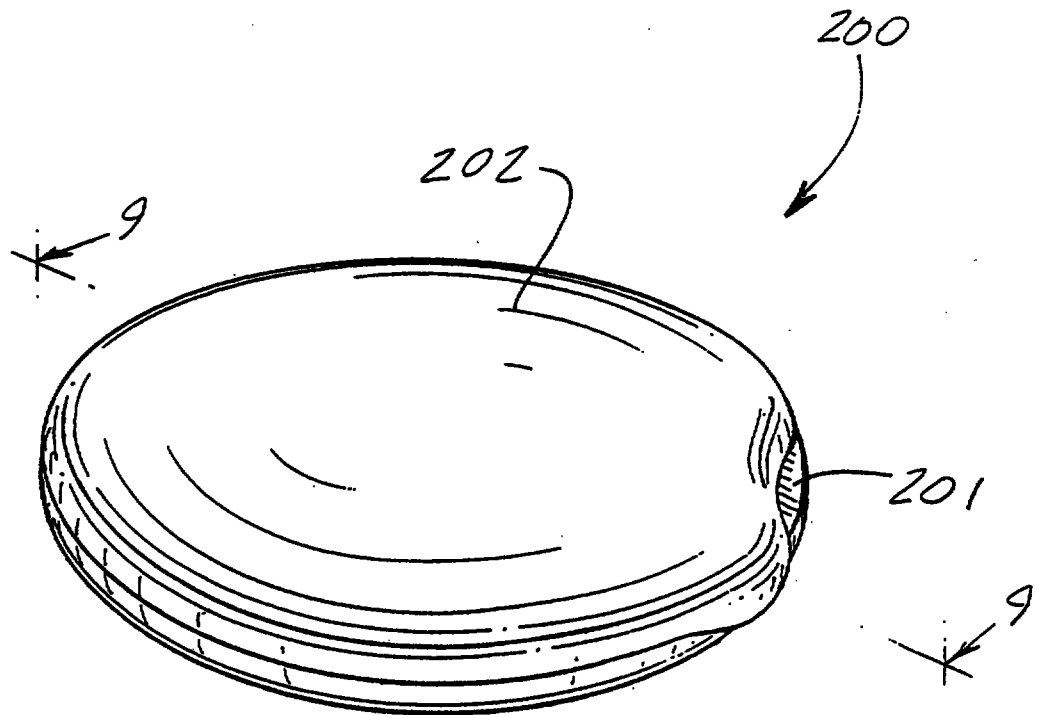


FIG-6

6

FIG-7

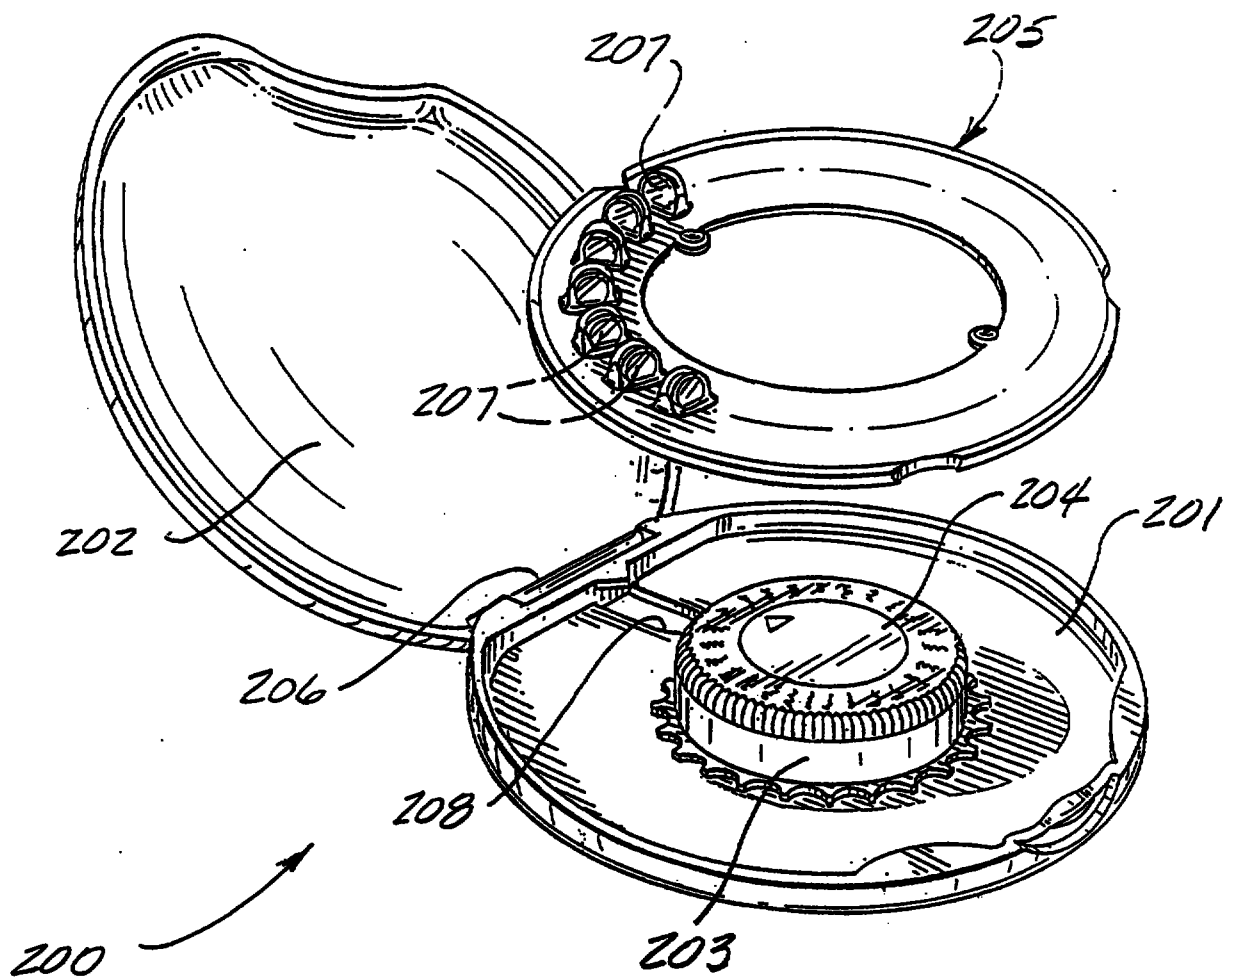
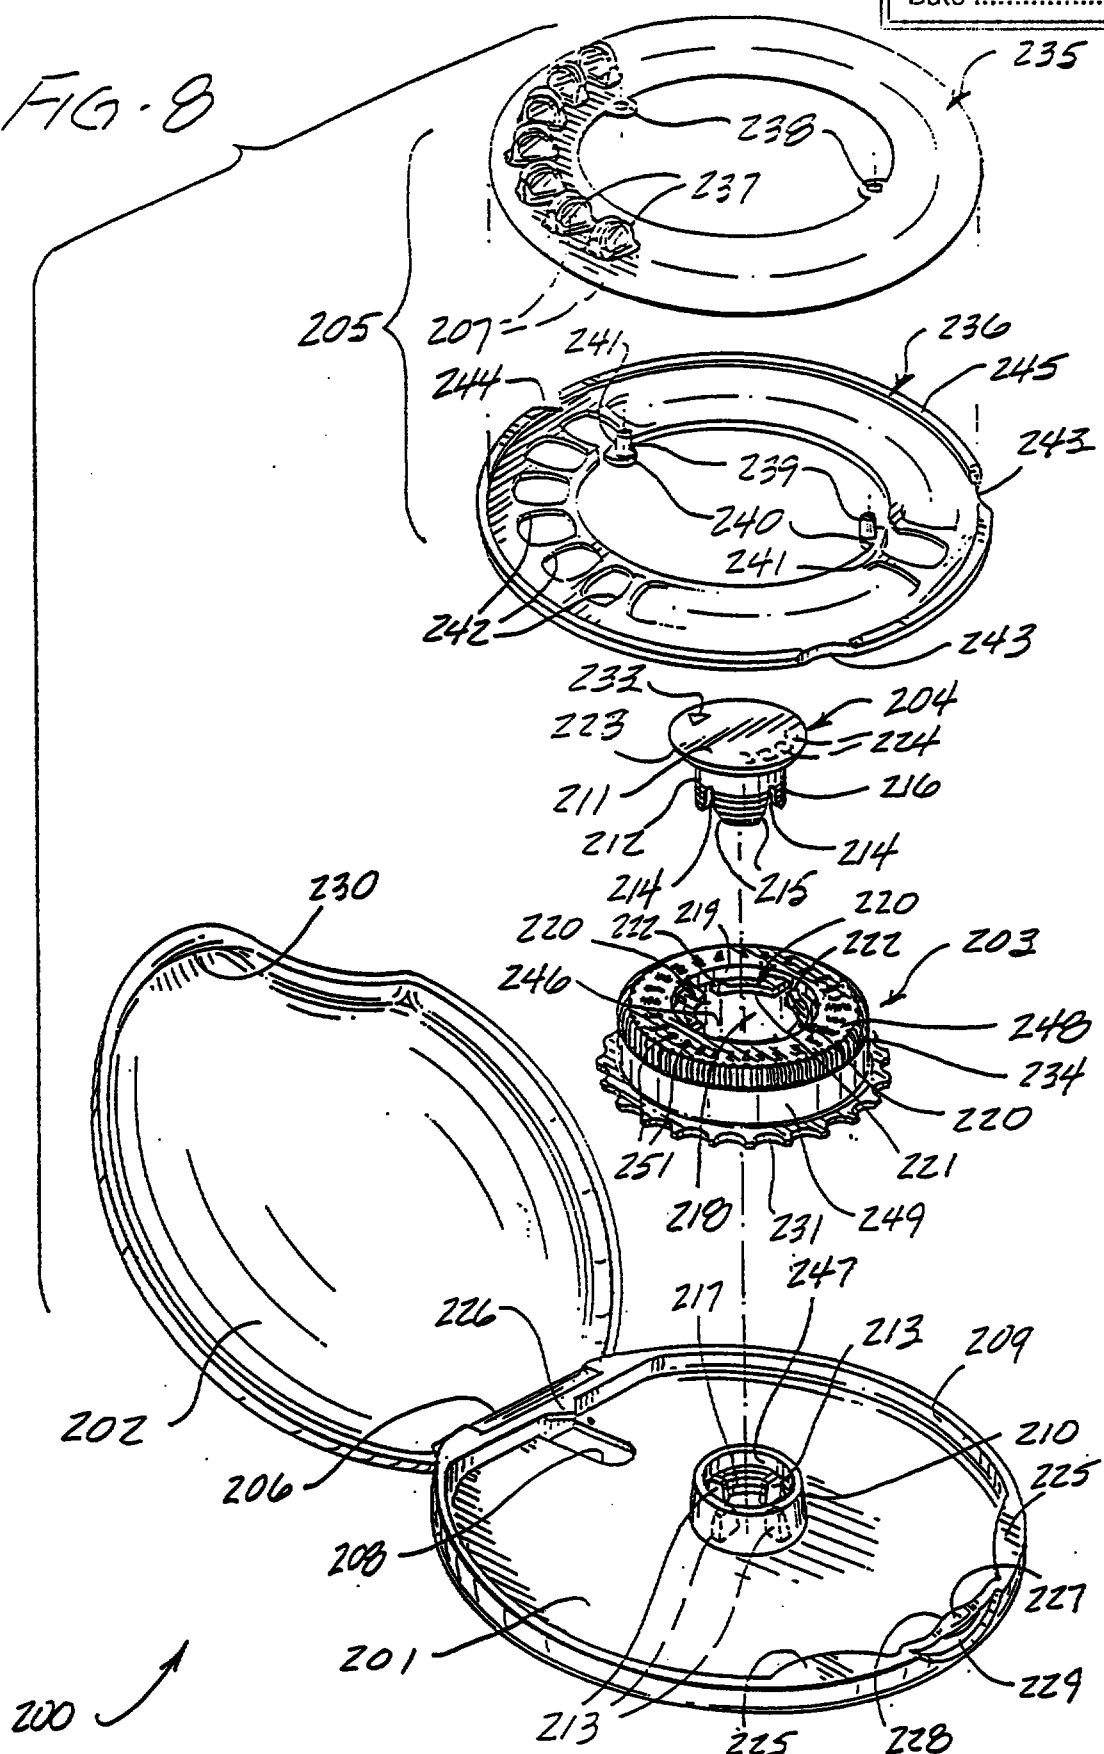


FIG. 8



Date : **06 MAR 1996**

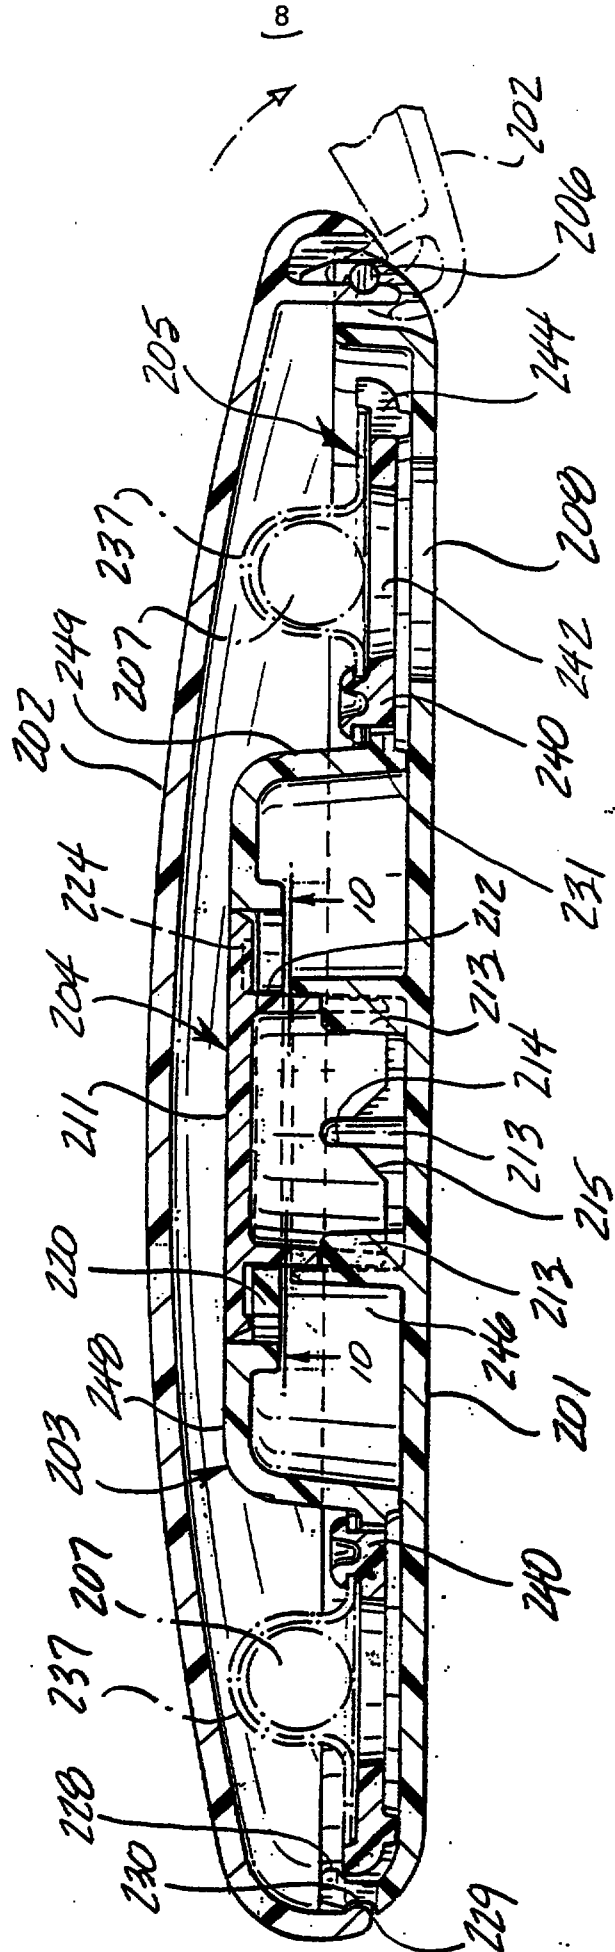


Fig. 9

FIG-10

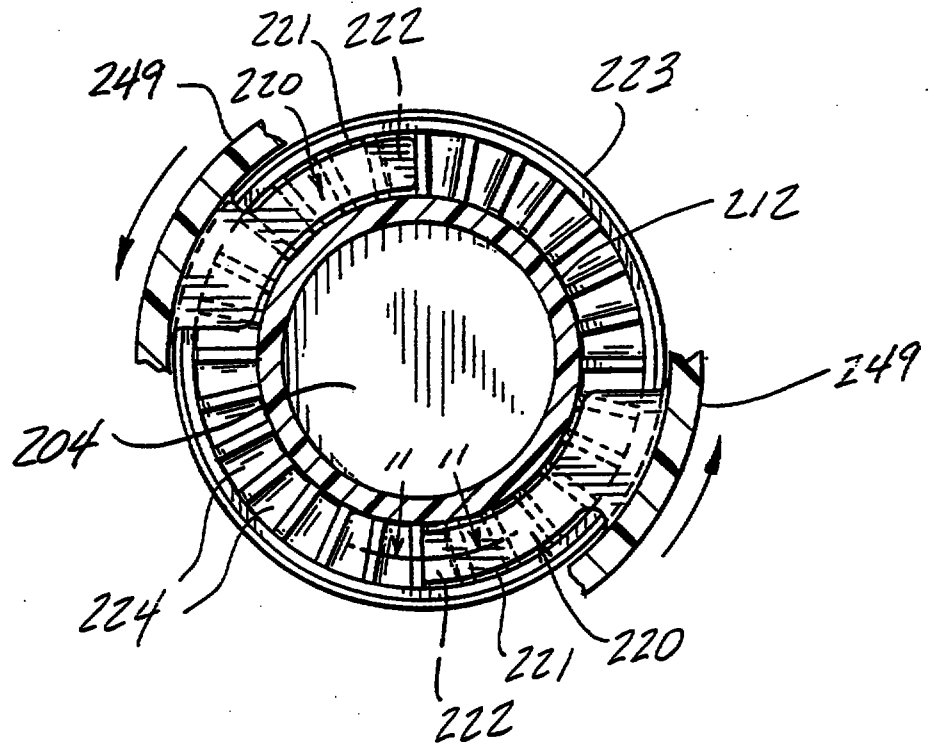
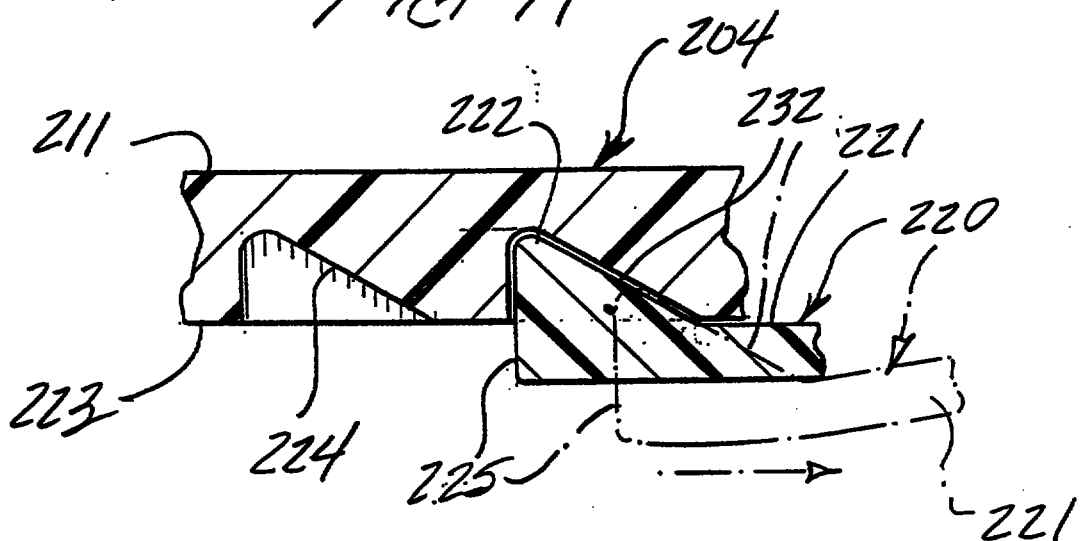


FIG-11



10

FIG-12

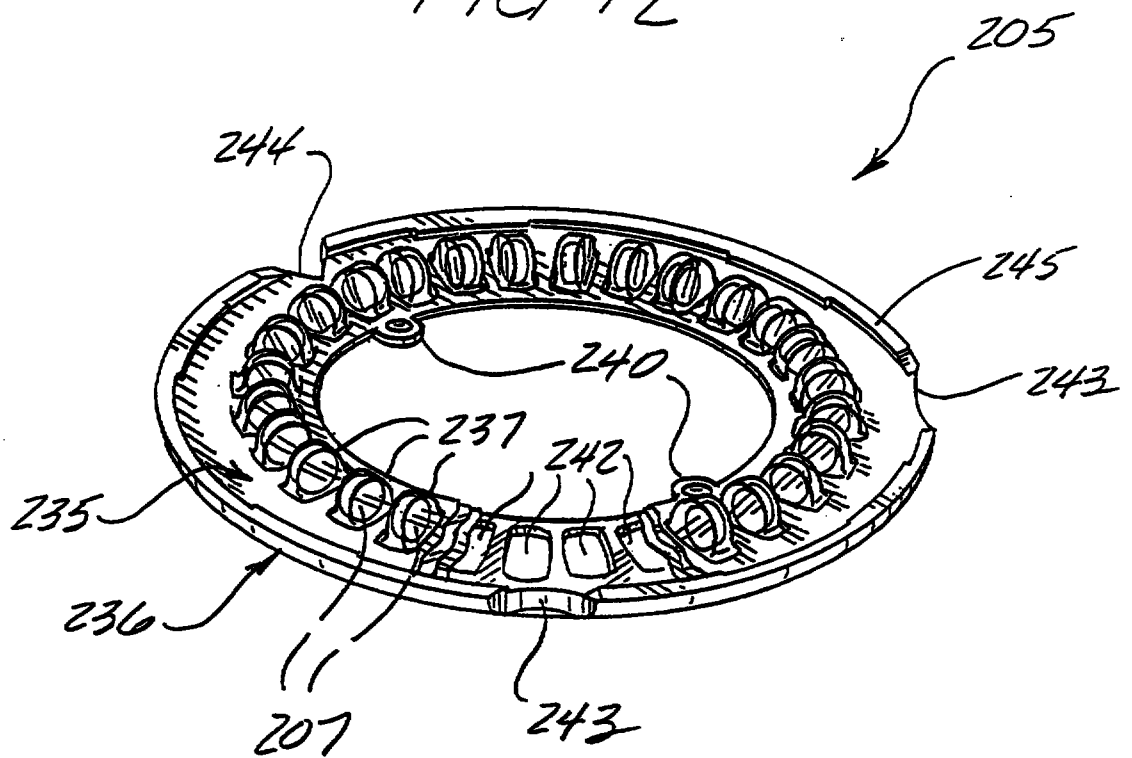
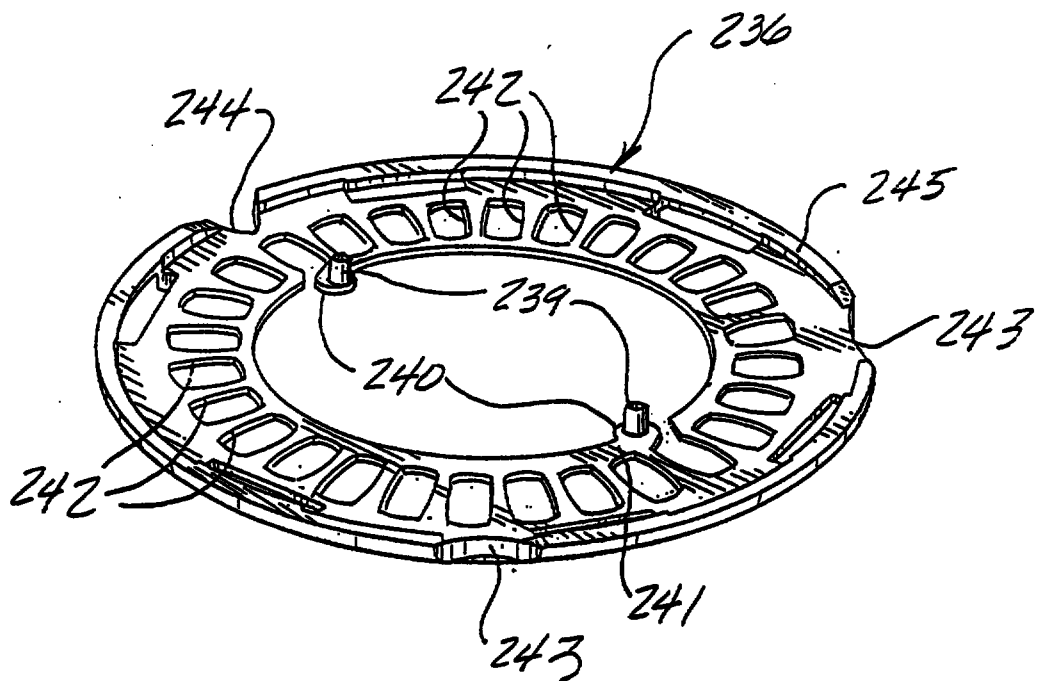
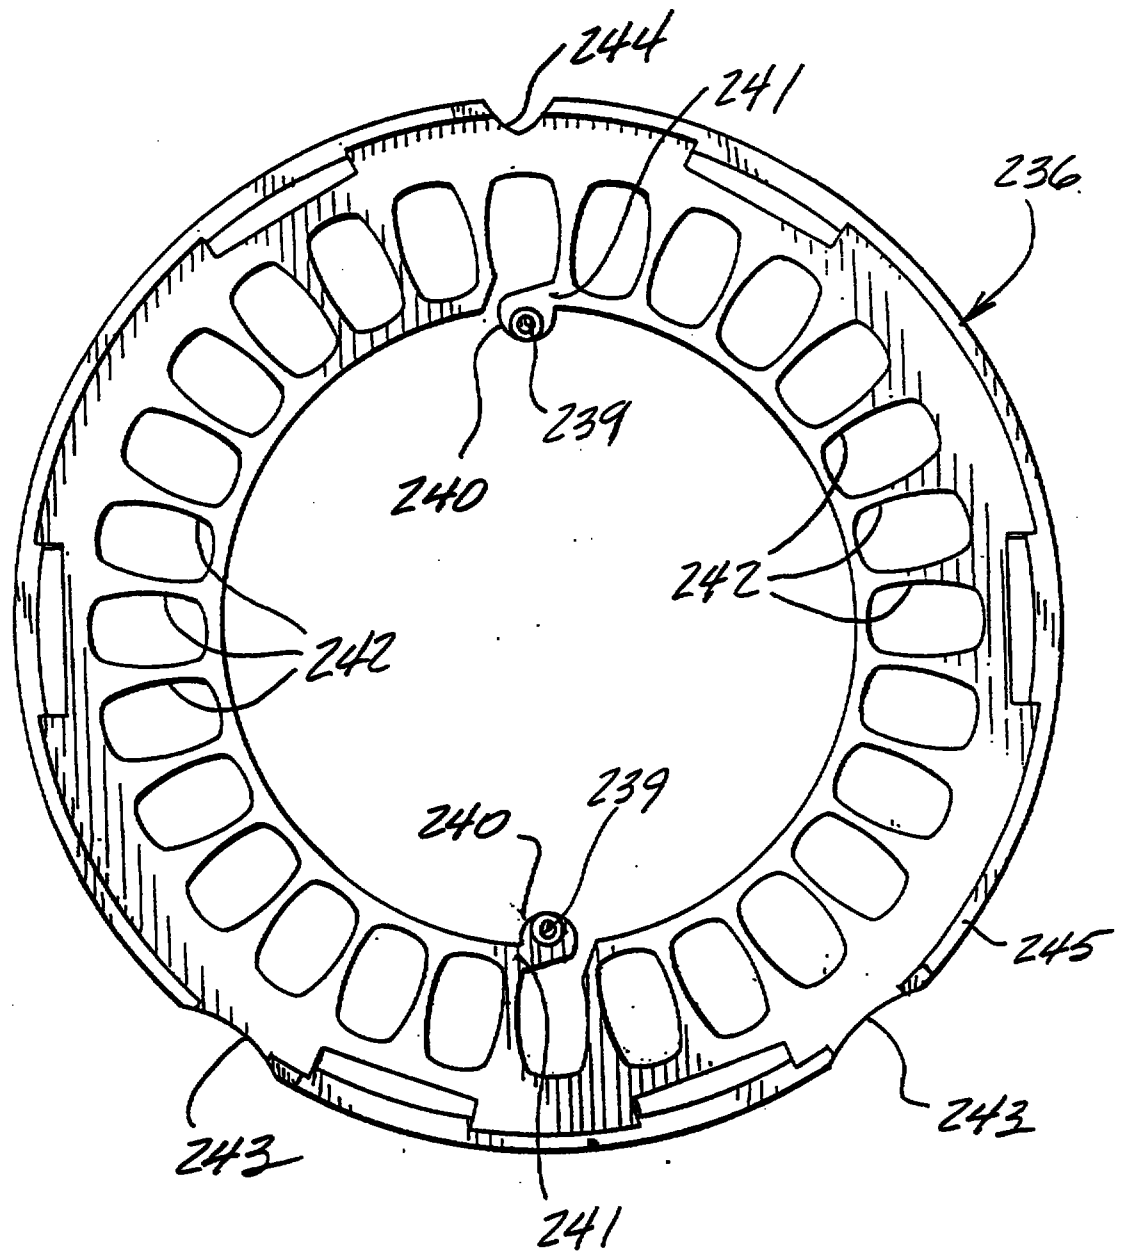


FIG-13



12

FIG-14



Date 06 MAR 1996

VARIABLE DAY START TABLET DISPENSER
FIELD OF THE INVENTION

ABSTRACT

5 This invention relates to a substantially circular
tablet dispenser component system which may be adapted for
a variable day start of a prescribed periodic tablet
regimen. Also provided are a tablet dispenser kit, a
tablet package adapted for filling the tablet dispenser
system, methods of filling the tablet dispenser of the
invention and methods of administering a prescribed
10 regimen of medication using the tablet dispenser system of
the invention.

Figure 1

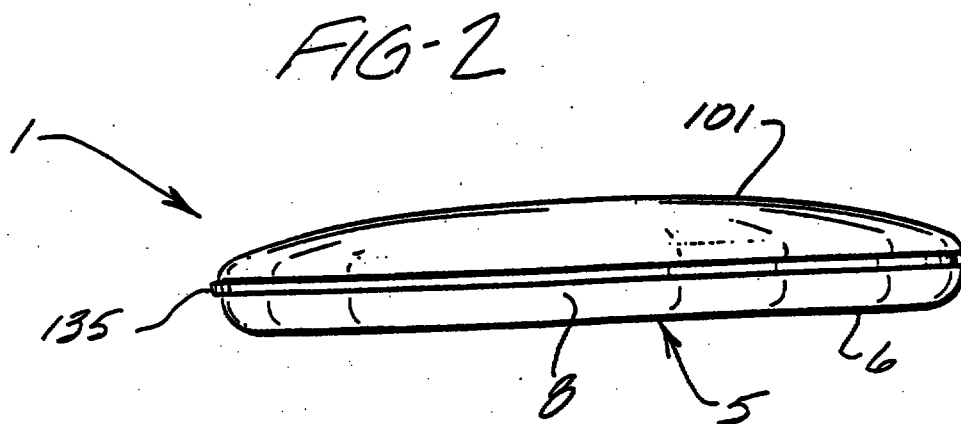
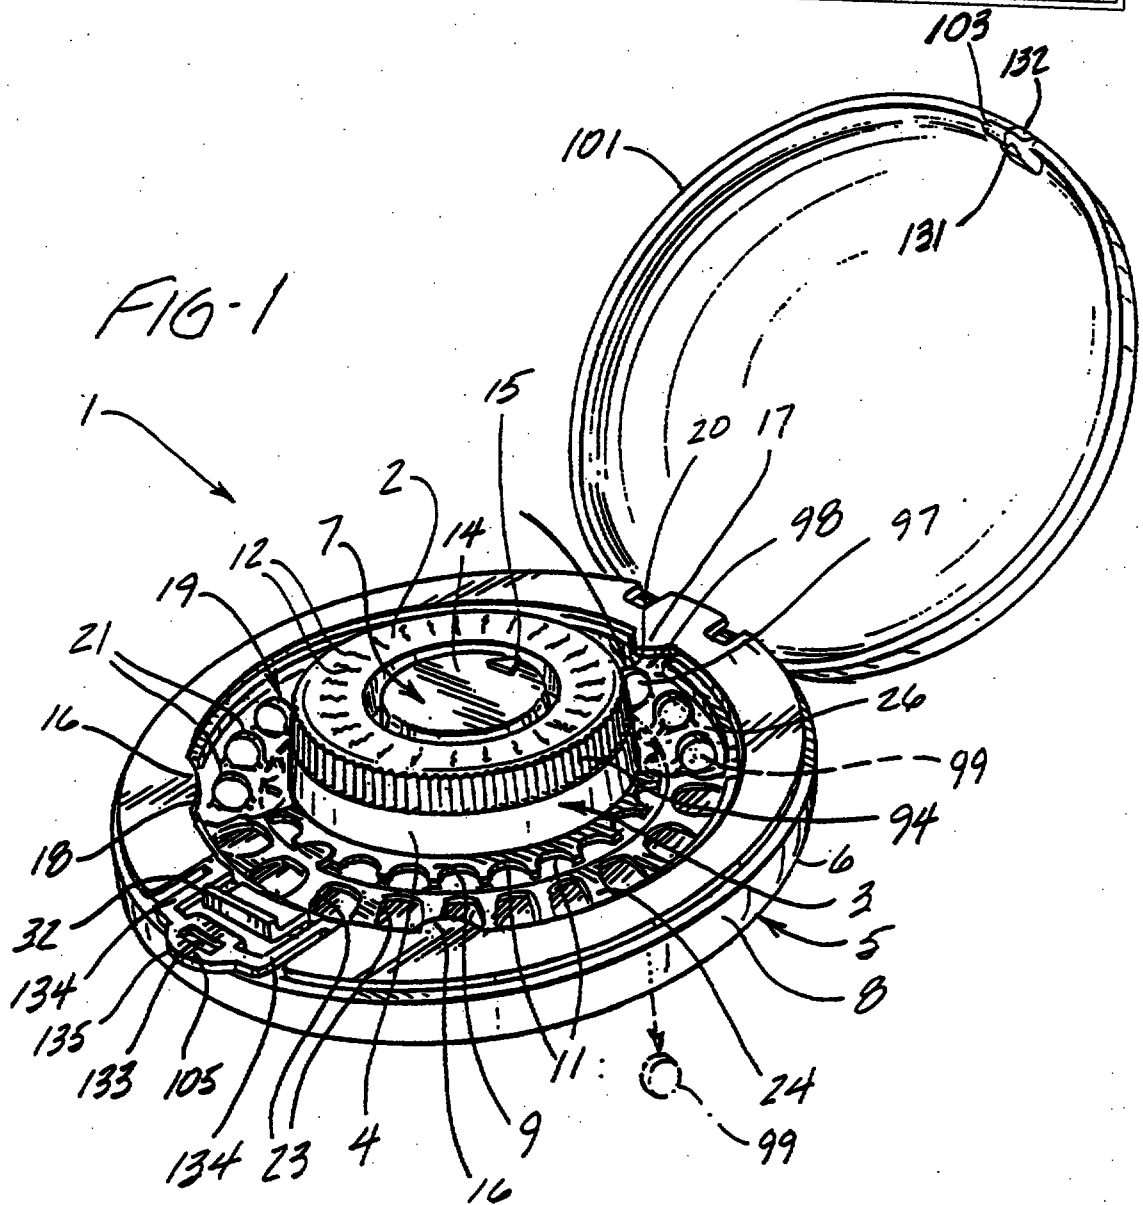
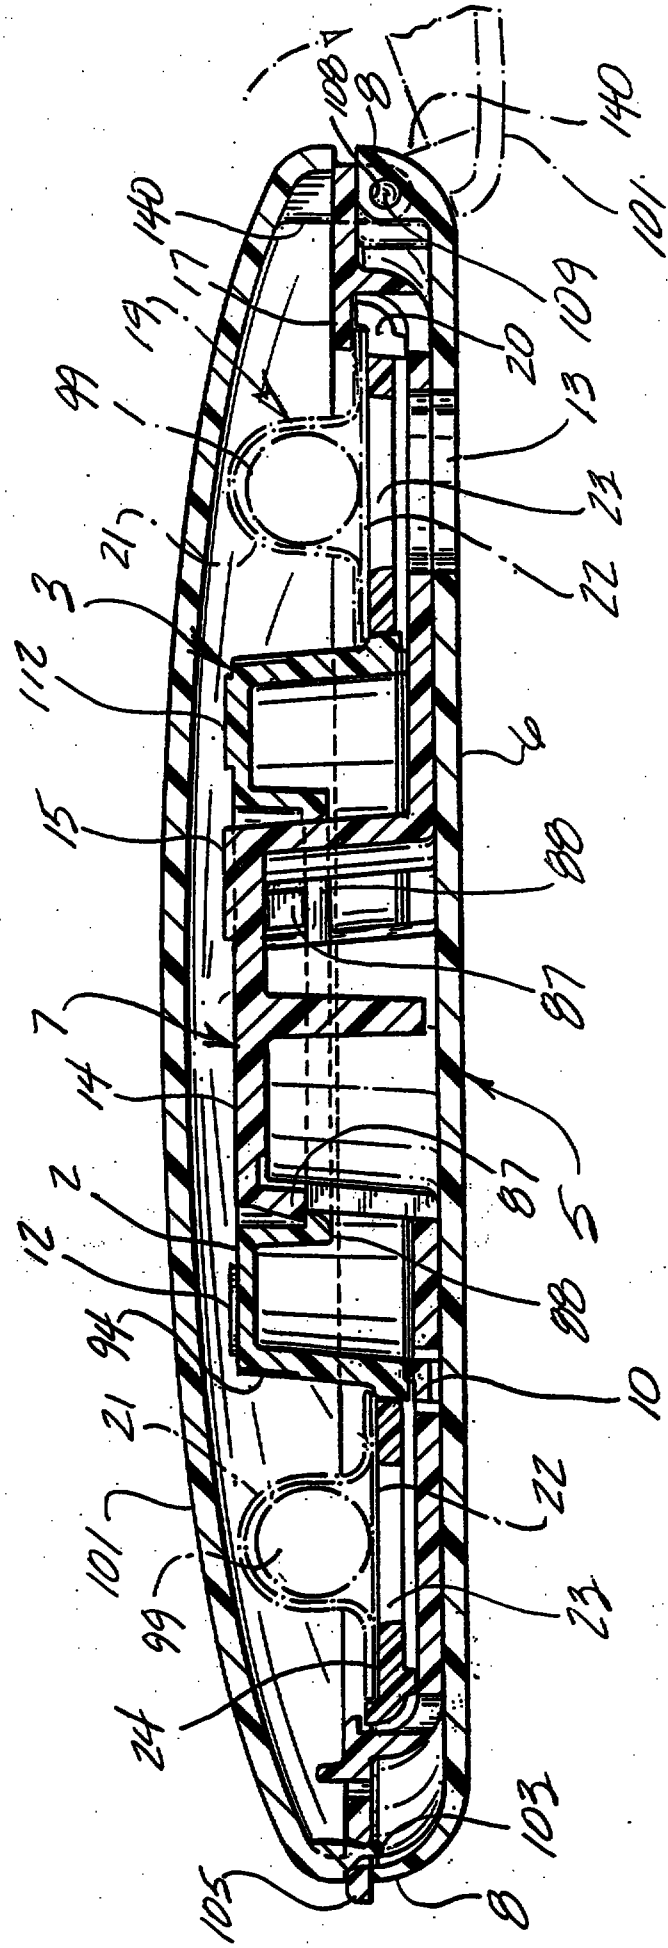


FIG-4



What is claimed is:

1. A tablet dispenser component system comprising:

as a first component a rotatable substantially circular unidirectional knob having indicators of periodicity thereon wherein the rotatable knob is encircled with a notched skirt comprising a plurality of notches spaced substantially equally apart, said rotatable knob having unidirectional ratchet means comprising a ratchet track with a plurality of ratchet stops whereby each positive engagement of said ratchet stops corresponds to a single space of each notch of the notched skirt;

as a second component a substantially flat support having a single tablet dispensing aperture therein and a rising wall portion protruding therefrom to form an interior cup portion thereon, a first engagement means whereby said rotatable knob is rotatably joined to said flat support, a fixed center axis means around which said rotatable knob is rotated in a circular fashion, and a second engagement means interposed with said unidirectional ratchet means forming a functional system therewith; and

a third component which is a separate and removable tablet package adapted to fit over the rotatable knob with means to positively engage the notched skirt such that the two components rotate in unison, said tablet package comprising a plurality of collapsible tablet pockets each containing a tablet arranged substantially circularly about the package whereby the spacing of the tablet pockets corresponds to each stop of the ratchet means whereby a new tablet is placed over the tablet dispensing aperture upon the positive engagement of each stop on the ratcheted rotatable knob, said tablet pockets being covered with a frangible membrane which is interposed between said pockets and the single tablet dispensing aperture of the support, whereby a tablet is dispensed



Date 27 JAN 1998

-31-

from the package by collapsing the pocket which is in registry with said aperture thereby urging said tablet to fracture said membrane and pass through said aperture.

2. The tablet dispenser system of claim 1 wherein the substantially flat support and interior cup portion formed thereon by wall portions rising therefrom is provided with means for supporting the tablet package in a substantially circular path around the fixed center axis and rotatable knob and for interlocking the tablet package in place upon engagement of a first stop of the unidirectional ratcheted and rotatable knob, whereby the tablet package is removable from the support means upon completion of a full rotation of the ratcheted and rotatable knob.

3. The tablet dispenser system of claim 2 wherein the rotatable knob comprises a calendared ring which is unidirectionally rotatable in a clockwise direction about the fixed center axis and the notched skirt is attached to the periphery of the rotatable knob.

4. The tablet dispenser system of claim 3 wherein the fixed center axis has an indicator mark aligned with the single tablet dispensing aperture of the flat support component.

5. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 2 and oral contraceptive tablets.

6. The tablet dispenser system of claim 1 wherein the means to positively engage the notched skirt comprises at least two complementary projections to positively engage at least two notches in the notched skirt when fitted over the rotatable knob.



7. The tablet dispenser system of claim 1 wherein the collapsible tablet pockets are formed to accommodate tablets of substantially circular, non-circular or caplet-like shape.
8. The tablet dispenser system of claim 1 wherein the substantially flat support is adapted for receiving and interlocking the tablet package by the provision of at least two inward extending ledges protruding from the rising wall portion, whereby the shape and orientation of said ledges correspond to at least two complementary recesses on the tablet packages permitting reception of said tablet package onto the flat support in a single initial position of tablet orientation about the flat support whereby a designated tablet is positioned above the tablet dispensing aperture at the initial tablet position and the tablet package is interlocked upon a single advance of the rotatable knob by overlap with said ledges; whereby said tablet package is not disengageable or removable until a complete rotation of the knob returns the tablet package to the initial tablet position.
9. The tablet dispenser system of claim 8 whereby the inward extending ledges are spatially arrayed to inhibit the receipt of the package on the substantially flat support and the disengagement, discharge or removal of the tablet package from the substantially flat support at any position other than the initial tablet position.
10. The tablet dispenser system of claim 9 wherein the spacial array of the inward extending ledges is asymmetrical.



11. The tablet dispenser system of claim 9 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support portion upon each advance of the positively engaging stop of the rotatable knob.
12. A method of filling the tablet dispenser system of claim 11 comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position, aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support, and placing said tablet package onto the substantially flat support.
13. A method of filling the tablet dispenser system of claim 9 comprising the steps of aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support and thereafter placing said tablet package onto the substantially flat support.
14. The tablet dispenser system of claim 8 whereby the inward extending ledges are shaped or sized to receive or disengage with the recesses of said notched tablet package only at the initial tablet position.



Date **27 JAN 1998**

-35-

15. The tablet dispenser system of claim 14 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support portion upon each advance of the positively engaging stop of the rotatable knob.
16. A method of filling the tablet dispenser system of claim 15 comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position, aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support, and placing said tablet package onto the substantially flat support.
17. A method of filling the tablet dispenser system of claim 14 comprising the step of aligning said at least two recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support and thereafter placing said tablet package onto the substantially flat support.
18. The filling method of claim 17 further comprising the subsequent steps of dispensing the initial tablet located at the initial tablet position and rotating the rotatable knob one stop to the next day in order to positively engage the tablet package in the tablet dispenser, thereby inhibiting disengagement of the package until a full rotation of the rotatable knob has been completed.



19. The tablet dispenser system of claim 8 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support upon each advance of the positively engaging stop of the rotatable knob.
20. A method of filling the tablet dispenser system of claim 19 comprising the steps of rotating the rotatable knob marked with the days of the week to align the desired start day of the week with the initial tablet position; aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support, and placing said tablet package onto the substantially flat support.
21. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 7 and oral contraceptive tablets.
22. A method of filling the tablet dispenser system of claim 8 comprising the steps of aligning at least two complementary recesses on the tablet package with at least two inward extending ledges protruding from the rising wall portion of the substantially flat support and thereafter placing said tablet package onto the substantially flat support.



- 23.. The tablet dispenser system of claim 1 wherein the rotatable knob is marked with at least seven of the days of the week whereby each of said markings is oriented to a single tablet position in the tablet package corresponding to an indicated day of the week when engaged in the flat support to provide a single tablet corresponding to an indicated day of the week over the single tablet dispensing aperture of the flat support upon each advance of the positively engaging stop of the rotatable knob.
24. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 23 and oral contraceptive tablets.
25. A method of administering a prescribed regimen of tablet medication comprising the utilization of the tablet dispenser system of claim 23 in which the tablets deployed therein, and the orientation of the days of the week to each tablet position, are adapted to a prescribed regimen.
26. The method of claim 25 wherein the prescribed regimen provides oral contraceptive or hormone replacement therapy.
27. The tablet dispenser system of claim 1 wherein the calendared rotatable knob is provided with periodicity means consisting of days of the week in at least one set of seven images on the rotatable knob such that there is an ordered one-to-one correspondence of days with ratchet stops and such that any setting of the knob in relation to the indicator mark constitutes a predisposed start day setting for the package.



28. The tablet dispenser system of claim 1 further comprising a lid portion to provide an enclosed compact package.
29. The tablet dispenser system of claim 28 wherein the lid and support comprise interlocking means for engaging the compact package in a closed position.
30. A tablet dispenser kit for the administration of oral contraceptives comprising a tablet dispenser system of claim 1 and oral contraceptive tablets.
31. A tablet dispenser system for dispensing a regimen of tablets in a designated sequence comprising:
- as a first element, a flat support having a single tablet dispensing aperture therein and an encircling wall portion erected thereto defining a cup-like interior;
 - as a second element, a pivot connected to the center of the flat support defining an axis;
 - as a third element a rotatable knob having a top surface with indicators of periodicity marked thereon in correspondence with the tablets, a means for gripping thereby to apply rotary force, and a central bore, sized for encircling the pivot;
 - as a fourth element, a first connecting means for rotatably connecting the rotatable knob coaxially to the flat support;
 - as a fifth element, a means for intermittent unidirectional advancement of the knob about the axis with registry corresponding to the aperture and the indicators of periodicity;
 - as a sixth element, a circular tablet package comprising a housing containing the tablets in a plurality of frangibly lidded collapsible tablet pockets arranged circularly about the package at a radial distance corresponding to the distance of the aperture from the



-39-

axis and having a central bore sized for encircling the rotatable knob;

as a seventh element, a means for orienting the tablet package to the flat support whereby the first tablet is located over the aperture and misorientation of the tablet package to the flat support is prevented; and

as a eighth element, a second connecting means for connecting the tablet package to the rotatable knob upon loading onto the flat support for any initial setting of the knob such that rotary force applied to the knob is translated to the tablet package providing the manner in which the tablet package is advanced thereby causing each tablet of the regimen to be presented in the designated order, accompanied with the corresponding indicator of periodicity and registered by the intermittent unidirectional advancement means, to the aperture for the purpose of dispensing a single tablet at a time from the tablet dispenser by collapsing the collapsible tablet pocket positioned thereto and urging the tablet through the frangible lidding into and through the aperture.

32. The tablet dispenser of claim 31 comprising as an additional element a means for indicating the location of the aperture remaining visible after loading the tablet package thereby providing a fixed registry point.

33. The tablet dispenser system of claim 32 wherein the pivot comprises a stationary flat surface elevated above the flat support by a support means projecting through a through-bore of the rotatable knob after assembly thereto.

34. The tablet dispenser system of claim 33 wherein the support means comprises a stalk having means for orienting the pivot stationary flat surface to the flat support, and thereby to the indicating means, and further having means for fastening the stalk rigidly to the flat support.



35. The tablet dispenser system of claim 34 wherein the means for fastening the stalk comprises a cylindrical wall portion, attached to the flat support at its center and contained within the bore of the rotatable knob when assembled thereto, for receiving the pivot stalk with a friction fit to the interior surface of the cylindrical wall.

36. The tablet dispenser system of claim 35 wherein the means for orienting the stalk comprises a plurality of radial vanes extending inward from the cylindrical wall portion wherein said vanes nest within complementary slots in the base of the stalk when assembled thereto.

37. The tablet dispenser system of claim 34 wherein the first connecting means comprises an overlap of a pivot stationary flat surface bottom surface and a plurality of clockwise-tending spring pawls based at the bottom of a second interior cylindrical wall spacing the spring pawls beneath the inner edge of the top surface of the rotatable knob, thereby forming a recess, the second interior cylindrical wall closely encircling the pivot stationary flat surface interposed in the recess and positioned relative thereto in assembly by an essentially cylindrical exterior wall elevating the top surface to a point of contact between the spring pawls and the pivot stationary flat surface when bottomed on the flat support.



-41-

38. The tablet dispenser system of claim 37 wherein the means for intermittent unidirectional advancement of the rotatable knob comprises the plurality of clockwise-tending spring pawls cantilevered for an upward bias and arrayed to match a circular clockwise-tending ratchet track formed into the pivot stationary flat surface bottom surface, with ridge and recess geometry of a conventional design and in registry with the indicators of periodicity and the indicating means, the interaction of components such that the spring pawls are urged downward by the rotation of the ratchet track over sliding face surfaces of the spring pawls, the spring pawls subsequently clearing the ridges and springing back into the recesses of the ratchet track thus simultaneously interrupting the rotation, positively locating the rotatable knob, and locking against counterclockwise thrust through interference of abutting face surfaces of the spring pawls and ratchet track ridges.

39. The tablet dispenser system of claim 38 wherein the method of assembling the flat support, the rotatable knob and the pivot comprises the steps of placing the rotatable knob over the center of the flat support, orienting the pivot to the flat support with the pivot orienting means, and connecting the pivot to the flat support with the pivot fastening means while coaxially inserting the pivot stationary flat surface into the recess formed by the second interior cylindrical wall of the rotatable knob, overlapping the spring pawls and interposing the spring pawls and ratchet track for cooperation therebetween.

40. The tablet dispenser system of claim 33 wherein the indicating means comprises a mark placed on the stationary flat surface of the pivot at the aperture position thereby facilitating visual alignment with the indicator of periodicity corresponding to the aperture position.



-42-

41. The tablet dispenser system of claim 32 wherein the means for orienting the tablet package comprises a plurality of ledges extending inwardly from the encircling wall portion of the flat support coupled with cut-aways on the periphery of the tablet package, complementary with the ledges in geometry and location, the ledges having underclearance for the rotation of the tablet package thereunder and spaced sufficiently apart to frustrate loading by angling the periphery underneath the ledges without proper alignment with the cut-aways, the periphery having sufficient stiffness to prevent forceable entry of the tablet package to the flat support without alignment of the ledges and cut-aways, the proper alignment of features thereby permitting receipt of the tablet package onto the flat support, the bypass of ledges and cut-aways occurring in no other than the preferred tablet orientation as a result of means for uniquely matching ledge and cut-away pairs.

42. The tablet dispenser system of claim 41 further comprising stiffening means comprising a rigid skeletal structure underlaying the tablet housing with apertures appropriately positioned to allow for the discharge of tablets through the underlayer, the skeletal structure fixed by bonding means to the tablet housing.

43. The tablet dispenser system of claim 42 wherein the bonding means comprises a plurality of posts erected from the skeletal structure and inserted through pilot holes provided in the tablet housing and subsequently headed over in rivet fashion for securing the assembly therewith.

44. The tablet dispenser system of claim 41 wherein the means for uniquely matching ledge and cut-away pairs comprises differing shapes for the ledge and cut-away pairs such that only one orientation results in a match.



* C L M S *

27 JAN 1998

Date :

-43-

45. The tablet dispenser system of claim 41 wherein the means for uniquely matching ledge and cut-away pairs comprises differing sizes for the ledge and cut-away pairs such that only one orientation results in a match.

46. The tablet dispenser system of claim 41 wherein the means for uniquely matching ledge and cut-away pairs comprises an asymmetrical spatial array of pairs such that only one orientation results in a match.

47. The tablet dispenser of claim 41 wherein a second indicating means comprises one of the ledges located adjacent to the aperture which is uniquely shaped like a pointer.

48. The tablet dispenser of claim 32 wherein the indicators of periodicity are days of the week.

49. The tablet dispenser of claim 48 wherein the method for loading with selection of a preferred starting day comprises the steps of removing any previously loaded tablet package, rotating the rotatable knob until the desired day is aligned with the indicating means and loading the tablet package onto the flat support with registry of the designated first tablet to the desired day.

50. The tablet dispenser system of claim 31 further comprising a means for retaining the tablet package onto the flat support and in continuous connection with the rotatable knob.



* C L M S *

-44-

51. The tablet dispenser system of claim 50 wherein the retaining means comprises a plurality of ledges extending inward with underclearance from the encircling wall portion of the flat support, the ledges matched to complementary cut-aways on the periphery of the tablet package thereby providing unique orientation during assembly, the ledges further overlapping the tablet package periphery for each position of the intermittent unidirectional advancement means other than the initial position, the ledges supplemented by a holding lug extending from a slotted portion of the encircling wall portion of the flat support, the holding lug having a ledge portion overlapping the tablet dispenser periphery for every position of the unidirectional advancement means and an inclined plane portion angled, during assembly, against the tablet package periphery such that downward force applied to the periphery flexes the slotted wall portion thereby allowing bypass of the tablet package and the holding lug, the spring-back of the slotted wall portion providing a tactile confirmation of the seating of the tablet package onto the flat support and in positive interlock with the rotatable knob.

52. The tablet dispenser system of claim 51 wherein the method of disengagement and removal of the tablet package from the tablet dispenser comprises the steps of indexing the rotatable knob to the initial position and lifting the tablet package from a location opposite the holding lug thereby clearing the ledges and pivoting over the lug into disengagement from the dispenser.

53. The tablet dispenser system of claim 31 further comprising a cover which encloses the tablet dispenser.

54. The tablet dispenser system of claim 53 wherein the cover is hinged to the flat support and secured in a closed position by a latch means.



* C L M S *

-45-

55. The tablet dispenser of claim 31 wherein the second connecting means comprises a notched skirt extending outward from the base of the rotatable knob with identical notches in registry with the intermittent unidirectional advancement means and at least one complementarily shaped lug on the tablet package which is positioned for interlocking with a corresponding notch when assembled thereto.

56. The tablet dispenser of claim 55 wherein the lugs and notches are reversed with respect to the rotatable knob and the tablet package.

57. The tablet dispenser of claim 55 wherein only two diametrically opposed lugs are used to assure firm connection with the notched skirt while providing ease of assembly.

58. The tablet dispenser of claim 57 wherein the lugs are weakly attached by fragile necks to a rigid skeletal structure underlaying the tablet housing and bonded by posts joined to the lugs and headed over in rivet-fashion after insertion through the complementary pilot holes in the tablet housing, thereby forming a robust composite, the weak attachment being such that the removal of the spent tablet housing material ruptures the fragile necks through force applied at the post heads, thereby providing separation of materials for recycling and preventing unauthorized use of the skeletal structure.

59. The tablet dispenser system of claim 31 further comprising a plurality of said table packages wherein a spent table package after use is replaceable with a freshly loaded tablet package providing thereby for a reusable dispenser, extendable in use through multiple refill replenishment.



-46-

60. The tablet dispenser of claim 31 wherein the collapsible tablet pockets are formed to accommodate various shapes and sizes of tablets postured either on a surface or on edge.

61. The tablet dispenser of claim 31 wherein the gripping means comprises an edge formed by the intersection of the top surface with an essentially cylindrical exterior wall which elevates the edge to an accessible height.

62. The tablet dispenser of claim 61 wherein the edge is knurled to facilitate hand gripping.

