



(43) International Publication Date
10 November 2011 (10.11.2011)

(10) International Publication Number
WO 2011/139849 A2

(51) International Patent Classification:
F24J 1/00 (2006.01)

(21) International Application Number:
PCT/US2011/034365

(22) International Filing Date:
28 April 2011 (28.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/343,469 28 April 2010 (28.04.2010) US

(72) Inventors; and

(71) Applicants : PALMER, Stephen, L. [US/US]; 4391
Cameron Road, Cameron, CA 95682 (US). PALMER,
William, R. [US/US]; 3026 Whitetail Drive, Rescue, CA
95672 (US).

(74) Agent: GARRETT, Arthur, S.; Finnegan, Henderson,
Farabow, Garrett & Dunner, L.L.P., 901 New York Av-
enue, N.w., Washington, DC 20001-4413 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: THERMAL SIGNALING OR MAKING DEVICE

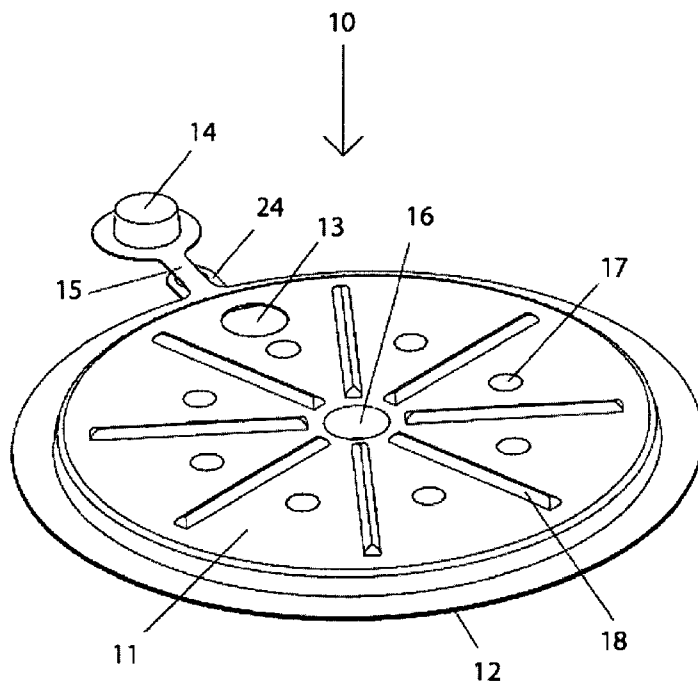


FIG. 1

(57) Abstract: Disclosed herein are multiple-
part electrochemical thermal signaling or
marking systems, comprising at least one first
part comprising at least one super- corroding
alloy and at least one absorbent material, and
at least one second part. The at least one first
part and the at least second part must be kept
separate until use, at which time they are com-
bined and heat generation commences. Further
disclosed herein are containment devices com-
prising such thermal signaling or marking sys-
tems.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*