

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
3 May 2007 (03.05.2007)

PCT

(10) International Publication Number  
**WO 2007/049083 A1**

(51) International Patent Classification:

**H01J 61/32** (2006.01) **H05B 41/36** (2006.01)  
**H01J 5/48** (2006.01)

(21) International Application Number:

PCT/HU2005/000118

(22) International Filing Date: 26 October 2005 (26.10.2005)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicants (for all designated States except US): **LÁS-ZLÓ, Endre Márton** [HU/HU]; Kiss József u. 2., H-1081 Budapest (HU). **RÁDAI, Miklós Gábor** [HU/HU]; Karinty Frigyes út 16., H-1111 Budapest (HU).

(71) Applicant and

(72) Inventor: **LUCZENBACHER, János István** [HU/HU]; Veresegyház u. 92/b., H-1151 Budapest (HU).


(74) Agent: **SBG & K PATENT AND LAW OFFICES**; Andrassy út 113., H-1062 Budapest (HU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: COMPACT FLUORESCENT LAMP

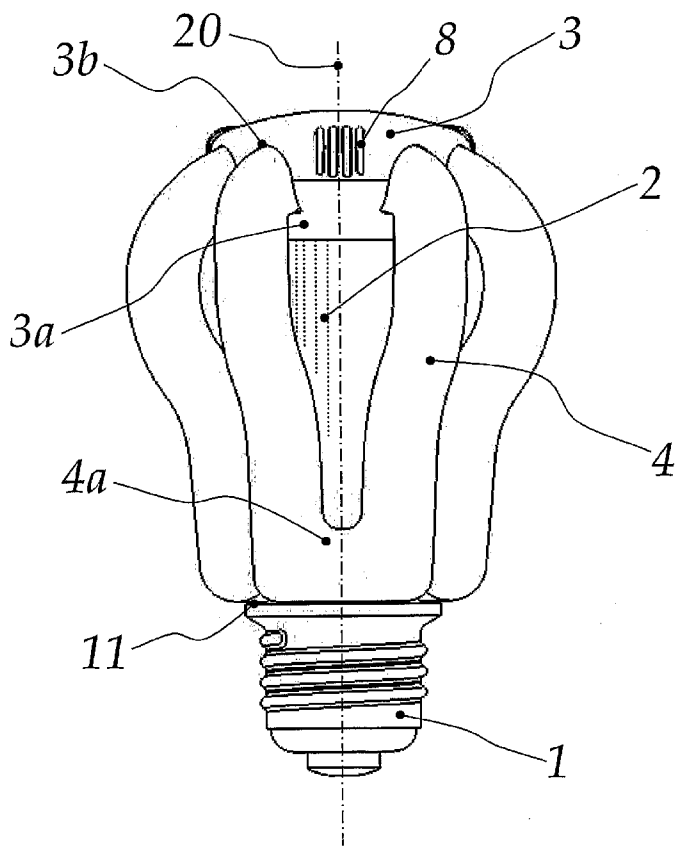

(57) Abstract: Compact fluorescent lamp having a known base (1), a central hollow column (2), attached to the base (1), and the outer surface of which has a heat- and light-reflecting coating; a cap (3) closing the hollow column (2); and one or more light-radiating members (4) secured to the cap (3) and/or to the hollow column (2). The light-radiating members (4) start from the hollow column (2) and connect to electronic and electric elements and pass through the holes (3b) of the hollow column and/or the cap (3). The lamp further comprises a guide-ring (11) to support the light-radiating members (4) extending until or beyond the meeting boundary edge of the base (1) and the hollow column (2). The hollow column (2), the base (1), the cap (3) and the guide ring (11) are encompassed with the light-radiating members (4) extending in at least a direction parallel with the longitudinal axis of the lamp towards the base (1) and back and the light-radiating members (4) have curved sections (4a). The lamp is retrofit with conventional bulb sockets.



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*