



(51) International Patent Classification:
H04L 1/00 (2006.01) *H04W 28/00* (2009.01)
H04B 7/06 (2006.01)

(74) Agent: **KUHL, Dietmar**; Grünecker, Kinkeldey, Stockmair & Schwanhäusser, Leopoldstraße 4, D-80802 München (DE).

(21) International Application Number:
PCT/EP2009/002422

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
2 April 2009 (02.04.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08008539.2 6 May 2008 (06.05.2008) EP

(71) Applicant (for all designated States except US): **PANASONIC CORPORATION** [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi., Osaka, 571-8501 (JP).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GOLITSHECK, Alexander Edler von Elbwart** [DE/DE]; Panasonic R&D Center Germany GmbH, Monzastrasse 4c, 63225 Langen (DE). **WENGERTER, Christian** [DE/DE]; Panasonic R&D Center Germany GmbH, Monzastrasse 4c, 63225 Langen (DE). **LÖHR, Joachim** [DE/DE]; Panasonic R&D Center Germany GmbH, Monzastrasse 4c, 63225 Langen (DE).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: CONTROL CHANNEL SIGNALLING FOR TRIGGERING THE INDEPENDENT TRANSMISSION OF A CHANNEL QUALITY INDICATOR

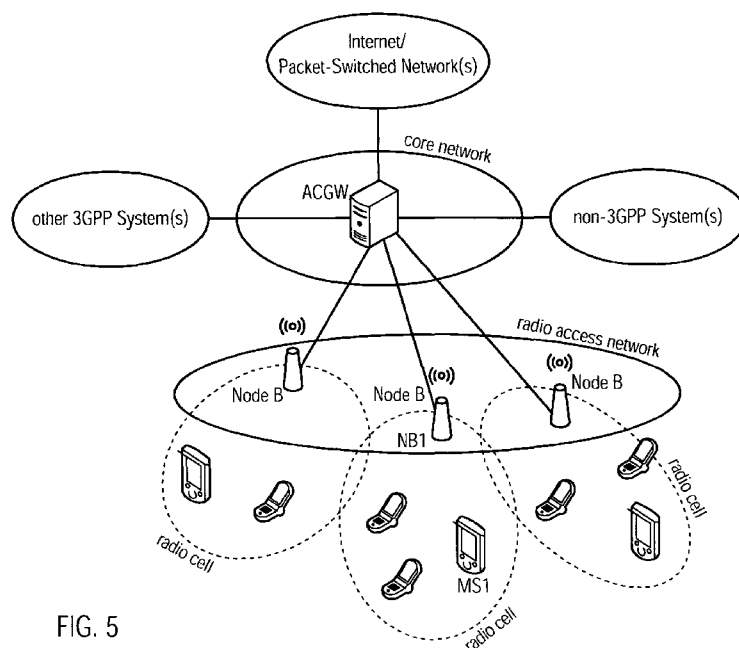


FIG. 5

(57) Abstract: The invention suggests a method for providing control signalling in a communication system, comprising the steps performed by a base station of the communication system of generating a control channel signal comprising a transport format and a channel quality indicator trigger signal for triggering a transmission of a channel quality indicator by at least one terminal to the base station, and transmitting the generated control channel signal to at least one terminal, wherein said transport format is a predetermined format for user data transmission by the at least one terminal to the base station and said control channel signal indicates a predetermined mode for reporting the channel quality indicator to the base station, wherein the channel quality indicator transmission is to be triggered by the at least one terminal based on the channel quality indicator trigger signal.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*