



(51) International Patent Classification:
A61N 5/06 (2006.01)

(21) International Application Number:
PCT/US2009/044182

(22) International Filing Date:
15 May 2009 (15.05.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/186,698 6 August 2008 (06.08.2008) US

(71) Applicant and

(72) Inventor: PEREZ, Thomas [US/US]; 3535 W. Irving
Park Road, Chicago, Illinois 60618 (US).

(74) Agents: SACHAROFF, Adam et al.; Much Shelist, 191
N. Wacker Drive, Suite 1800, Chicago, Illinois 60606
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,

EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),
OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,
MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: UV LIGHT THERAPY DELIVERY APPARATUS

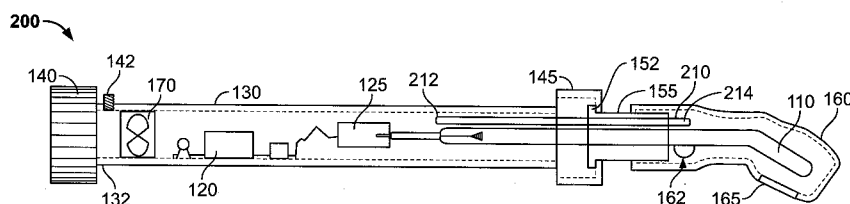


FIG. 3

(57) Abstract: An light therapy apparatus is defined to include a UV light source secured to a casing. A shroud is placed over an exposed portion of the UV light source and is secured or attached around the perimeter of the casing end. Since the UV light source can generate a significant amount of heat, the casing includes an internal fan. Various tubing configurations may be used to help direct the air flow from the fan around the UV light source. In addition, a vent opening in the shroud was found to reduce the temperature of the shroud to prevent damage to a person's user the apparatus.

