



- (51) International Patent Classification: Not classified
- (21) International Application Number:
PCT/US2012/025650
- (22) International Filing Date:
17 February 2012 (17.02.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/041,611 7 March 2011 (07.03.2011) US
- (71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US];
2601 Beltline Road, Carrollton, TX 75006 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **VEIT, Jan** [CZ/US];
3201 Dover Drive, Plano, TX 75075 (US).
- (74) Agent: **YOUST, Lawrence, R.**; Lawrence Youst PLLC,
One Waterway Court, Suite 3B, The Woodlands, TX
77380 (US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

Published:

- without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: CHECK VALVE ASSEMBLY FOR WELL STIMULATION OPERATIONS

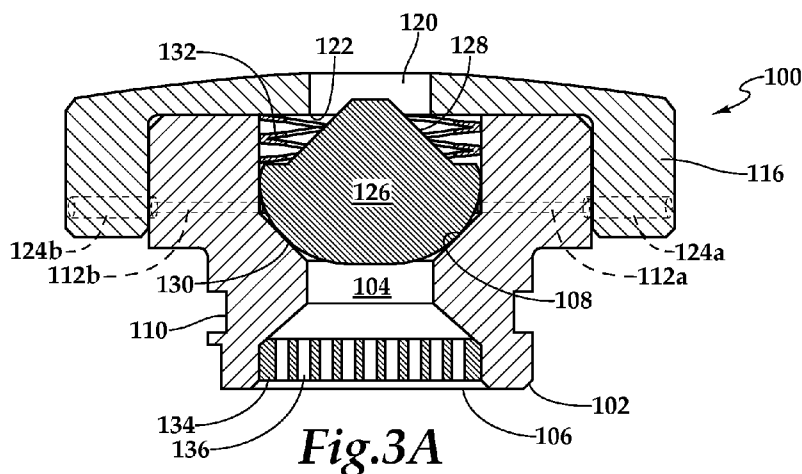

(57) Abstract: A check valve assembly for well stimulation operations. The check valve assembly includes a valve body having an axially extending passageway including an inlet and a valve body seat. The valve body has a discharge port extending laterally from the passageway. A valve cap slidably engages with the valve body and has an opening with a valve cap seat. A piston is disposed within the passageway. In a closed position, a first sealing surface of the piston engages the valve body seat to prevent fluid communication between the inlet and the discharge port. In an open position, a second sealing surface of the piston engages the valve cap seat allowing fluid communication between the inlet and the discharge port. A spring disposed within the passageway between the piston and the valve cap biases the piston toward the closed position.