

REPLACED SHEETS	SG
☒ Description : paged ...1... to paged ...8...	
☒ Claim(s) : paged ...1... to paged ...10...	
☐ Drawing(s) : paged to paged	
☒ Abstract : paged ...11... to paged ...12...	
DATE OF RECEIPT	

TITLE: STERILISER

TECHNICAL FIELD

The present invention relates to sterilisers, in particular, to instrument sterilisers used in dental surgeries.

5 BACKGROUND ART

At present dental instruments are sterilised by either boiling, autoclaving or chemical means.

Autoclaving is generally accepted as the most effective means available. Chemical sterilisation is time consuming and reserved generally for items which will not survive autoclaving.

The real and imagined problems relating to the transmission of AIDS and hepatitis B have focussed attention on the dental handpiece which often only receives a quick wipe with alcohol. It is generally accepted that health authorities will in the near future

This Sheet Has Been Replaced



require everything which is used in a patient's mouth to be autoclaved.

The high cost of dental handpieces makes it important to have a fast turnover through the autoclave.

5 At present, a good autoclave cycles in about 12 minutes. Therefore, if a handpiece misses one cycle, it will not be ready for use for 24 minutes. Understandably, such a down-time would be unacceptable in most busy dental surgeries.

10 The present invention seeks to overcome these problems by providing a simple, inexpensive steriliser with a rapid cycle time.

DISCLOSURE OF THE INVENTION

According to the present invention there is
15 provided a steriliser comprising a head and a detachable container sealingly engageable therewith to provide a pressure-resistant chamber, said head having mounted therein a heating means, control means coupled to said heating means for controlling the operation of the
20 heating means to maintain its temperature within a predetermined range and means connected to the steriliser for bringing a predetermined volume of water or sterilising fluid into contact with the heating means.

Preferably, a heat sink means is provided in the
25 head surrounding the heating means. For preference, the head is provided with a controllable valve means communicating with said chamber to control the fluid pressure therein. In one particular preferred form the

This Sheet Has Been Replaced



head is pivotally mounted to a frame such that the steriliser may be selectively moved between a horizontal inoperative position and a vertical operative position with the container extending upwardly from the head.

5 Preferably, the heating means is a thermostatically controlled electric heating element.

BRIEF DESCRIPTION OF THE DRAWINGS

A preferred embodiment of the invention will now be described, by way of example only, with reference to the
10 accompanying drawings in which:

Figure 1 shows a side elevation of the steriliser according to one embodiment of the invention;

Figure 2 shows an end elevation of the steriliser shown in Figure 1;

15 Figure 3 shows an end elevation of the canister and head of Figure 1 in the operative vertical position;

Figure 4 shows a side elevation of the canister and head of Figure 3;

Figure 5 shows a section view of the head of
20 Figure 3;

Figure 6 shows a side elevation of the canister and head in a separated position;

Figure 7 shows a plan view of the canister and head of Figure 6;

25 Figure 8 shows a side elevation of a further embodiment of the canister arrangement according to the invention; and



Figure 9 shows a side elevation of the support used for the canister arrangement of Figure 8.

BEST MODE FOR CARRYING OUT THE INVENTION

Referring to the drawings, a preferred embodiment of the invention will be now described. The steriliser comprises a base frame 5, having two side support frames 6 and 7 and a central support frame 8 extending vertically from the base frame 5. The support frames are journalled to receive a pivot axle 9 which passes through holes 10 in the support frames. The pivot axle 9 serves to pivot mount a head 11 of the steriliser to the base frame 5. The base frame shown accommodates two heads and it will be appreciated that the frame could be designed to accommodate any desired number of heads. The head 11 has screw mounted thereto an instrument receiving canister 12 having at its end 13 remote from the screw mounting a handle 14 to assist fitting and removal of the canister 12 from the head 11. The base frame 5 is further provided with an integral water tank and condenser 19.

Further details of the head and canister will be described with particular reference to Figures 3 to 7 of the accompanying drawings. The canister 12 is in the form of a cylinder having one end closed and the other open to receive items to be sterilised. The open end 15 is provided with an external screw thread 16 for engaging an internal thread 17 provided in the opening of the head 11. A pressure seal 18 is provided in the head 11 to



form a pressure tight seal when the canister thread 16 is fully tightened into the head thread 17.

The head 11 is generally cylindrical in shape, having an internal cavity 20 into which is mounted a heating element 21. The heating element 21 is surrounded by a heat sink 22 which, in this embodiment, comprises a number of bronze balls 23 which are packed around the heating element 21. It will be appreciated that the heat sink can take other forms, such as metal rods, drilled solid bodies, granules of other suitable metals or the like. The canister 12 is supported on a shaped support ramp 24 extending from the head 11. This ramp 24 assists in support and correct fitting of the canister 12 to the head 11 when one is being screwed to the other. The head 11 is provided with two outlet ports 25 and 26. One of the ports 25 has a pressure relief valve 27 operable by control button 28 for selectively opening the port 25. The other port 26 is connected by a tube 29 to a pressure gauge 30 and safety relief valve 31 mounted on the underside of the support ramp 24. The port 25 is connected by a flexible tube 32 to a condenser coil (not shown) positioned in the water tank 19.

In use, the heating element 21 is maintained in a preselected temperature range by a thermostatic control of the electric current feed to the element 21. The element 21 may also be controlled by a pressure switch which deactivates the element when a desired pressure is reached within the head. The element remains on



throughout the day with heat loss limited by a cap which may be fitted to the head in the absence of the canister. The element cycles within a preset temperature range.

5 To sterilise an item, the canister 10 is unscrewed from the head 11 and the item to be sterilised placed in the canister 12 with a predetermined amount of water. The canister 12 is then screwed into the head 11 while resting in a generally horizontal position as shown in
10 Figure 1. The canister 12 is then pivotted about the axle 9 to a vertical position causing the water to contact the heating element 21 and heat sink 22 resulting in the production of steam, pressure and temperature within the canister 12. The pressure being controlled by
15 the pressure release valve or the safety valve 26. Once the autoclaving has been completed, the canister is lowered to the horizontal position which activates the pressure relief valve on the head via control button 28, resulting in the internal pressure being totally released
20 and the steam passing into the condenser coil via tube 32. The sterilised item may then be removed by unscrewing the canister 12.

In a further preferred form of the invention shown in Figures 8 and 9, the canister 12 is surrounded by a
25 sleeve 33. The closed end of the canister 12 is provided with a shaped protrusion or boss 34 which engages with a complementary shaped recess 35 on the inner side of the closed end of the sleeve 33. When engaged the boss 34



and recess 35 prevent relative rotational movement between the sleeve 33 and the canister 12 so that the handle 14 on the sleeve 33 may be used to screw the canister 12 into engagement with the head 11. The sleeve
5 33 fits over the canister 12 with a small air gap and serves to insulate the canister 12 against heat loss or burns and to act as a handle for the canister 12.

To prevent unintentional opening of the canister 12 during operation, the frame 5 is provided with a guide
10 rail 36 which engages with the outer edge 37 of the open end of the sleeve 33 and acts to slide the sleeve 33 and its associated boss 34 out of engagement with the recess 35 as the canister is raised to its operative position. This disengagement of the sleeve from the canister
15 prevents unintentional opening of the canister during the sterilising operation.

It will be appreciated that water or sterilising fluid may be introduced into contact with the heating element by any suitable means, for example the head could
20 remain in a fixed position and fluid could be injected into contact with the heating element using a pump. Alternately, the head may be provided with a fluid reservoir having a spring-loaded push valve connecting the reservoir to the interior of the head. A screw cap
25 on the reservoir, on being tightened, depresses the push valve to cause fluid to enter the head and contact the heating element. The valve closes automatically under force of the internal pressure and the spring.



It will be further appreciated that other
embodiments of the invention are possible without
departing from the spirit or scope of the invention
described and the invention is not limited to the
5 specific embodiment described or in its application to
dental instruments.

This Sheet Has Been Replaced





CLAIMS

1. A steriliser comprising a head and a detachable container sealingly engageable therewith to provide a pressure-resistant chamber, said head having mounted therein a heating means, control means coupled to said heating means for controlling the operation of the heating means to maintain its temperature within a predetermined range and means connected to the steriliser for bringing a predetermined volume of water or sterilising fluid into contact with the heating means.
2. A steriliser according to claim 1 wherein the head is pivotally mounted to a frame such that the steriliser may be selectively moved between a horizontal inoperative position and a vertical operative position with the container extending upwardly from the head.
3. A steriliser according to claim 2 wherein said water or sterilising fluid are brought into contact with the heating means when the steriliser is moved to said operative position.
4. A steriliser according to claim 2 wherein the head is provided with a controllable valve means communicating with said chamber to control the fluid pressure therein.
5. A steriliser according to claim 4 wherein said controllable valve means is operable in response to said steriliser moving from said operative position to said inoperative position to release the fluid pressure within said chamber.

This Sheet Has Been Replaced



6. A steriliser according to claim 1 wherein a heat sink means is provided in the head surrounding the heating means.

7. A steriliser according to claim 4 including condenser means coupled to said valve means for condensing fluid released from said chamber.

8. A steriliser according to claim 2 further including means for preventing removal of said container from said head when the steriliser is in said operative position.

9. A steriliser according to claim 8 wherein said container and head are engaged by means of complimentary screw threads and said means for preventing removal comprises a outer sleeve surrounding said container and
5 selectively engageable therewith, said outer sleeve being engaged with the container when the steriliser is in the inoperative position to allow the container to be rotated by the outer sleeve and removed from the head, whereas when the steriliser is in the operative position means
10 are provided for disengaging the outer sleeve from the container and allowing the outer sleeve to move freely relative to the container and prevent rotation of the container by the outer sleeve.

10. A steriliser substantially as hereinbefore described with reference to the accompanying drawings.



This Sheet Has Been Replaced



ABSTRACT

STERILISER

A steriliser comprising a head (11) and a detachable container (12) sealingly engageable therewith to provide a pressure-resistant chamber. The head (11) having mounted therein a heating element (21). The head (11) is pivotally mounted to a frame (5,8) such that the steriliser may be selectively moved between a horizontal inoperative position and a vertical operative position with the container (12) extending upwardly from the head (11). The water or sterilising fluid are brought into contact with the heating element (21) when the steriliser is moved to said operative position so as to cause the fluid to vaporize and pressurize the chamber resulting in articles positioned in the chamber being sterilised.

This Sheet Has Been Replaced



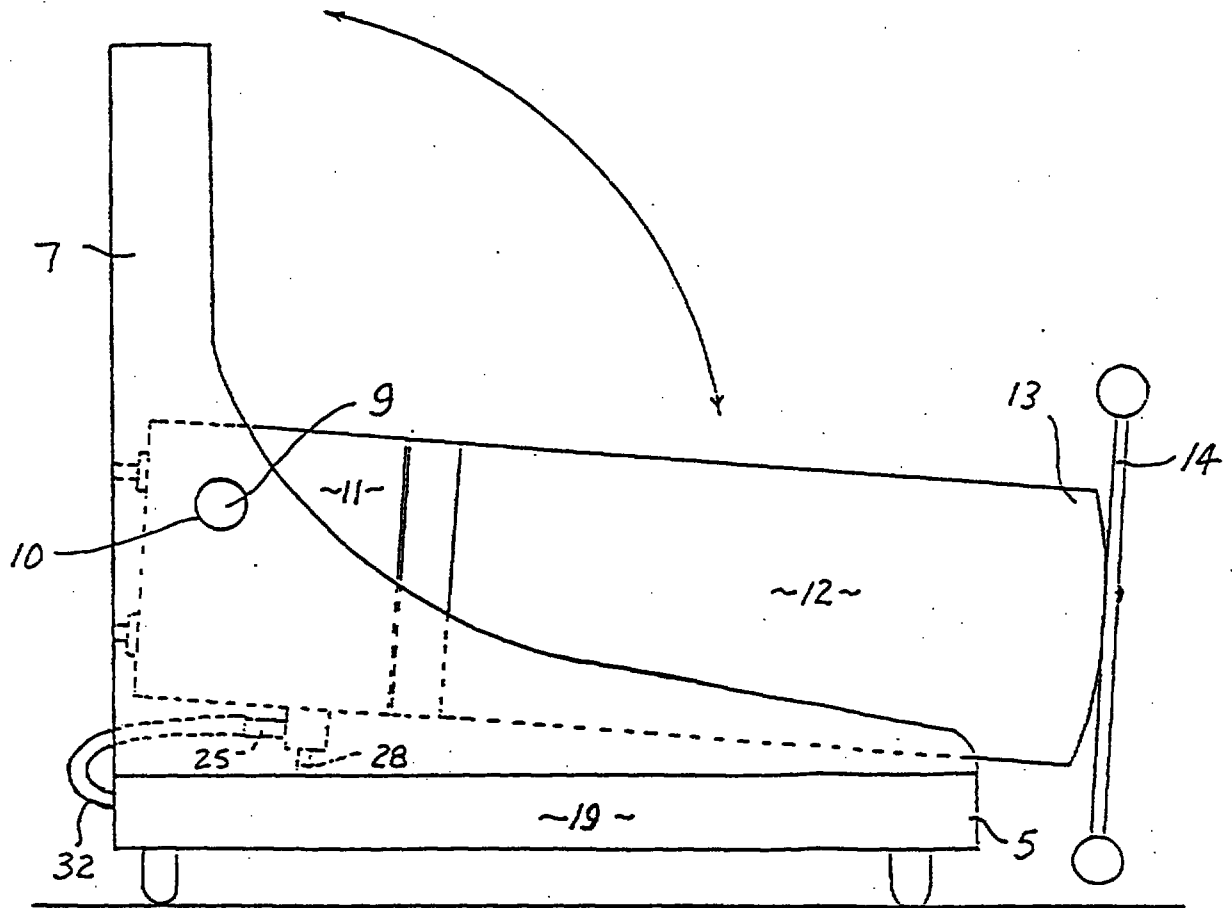
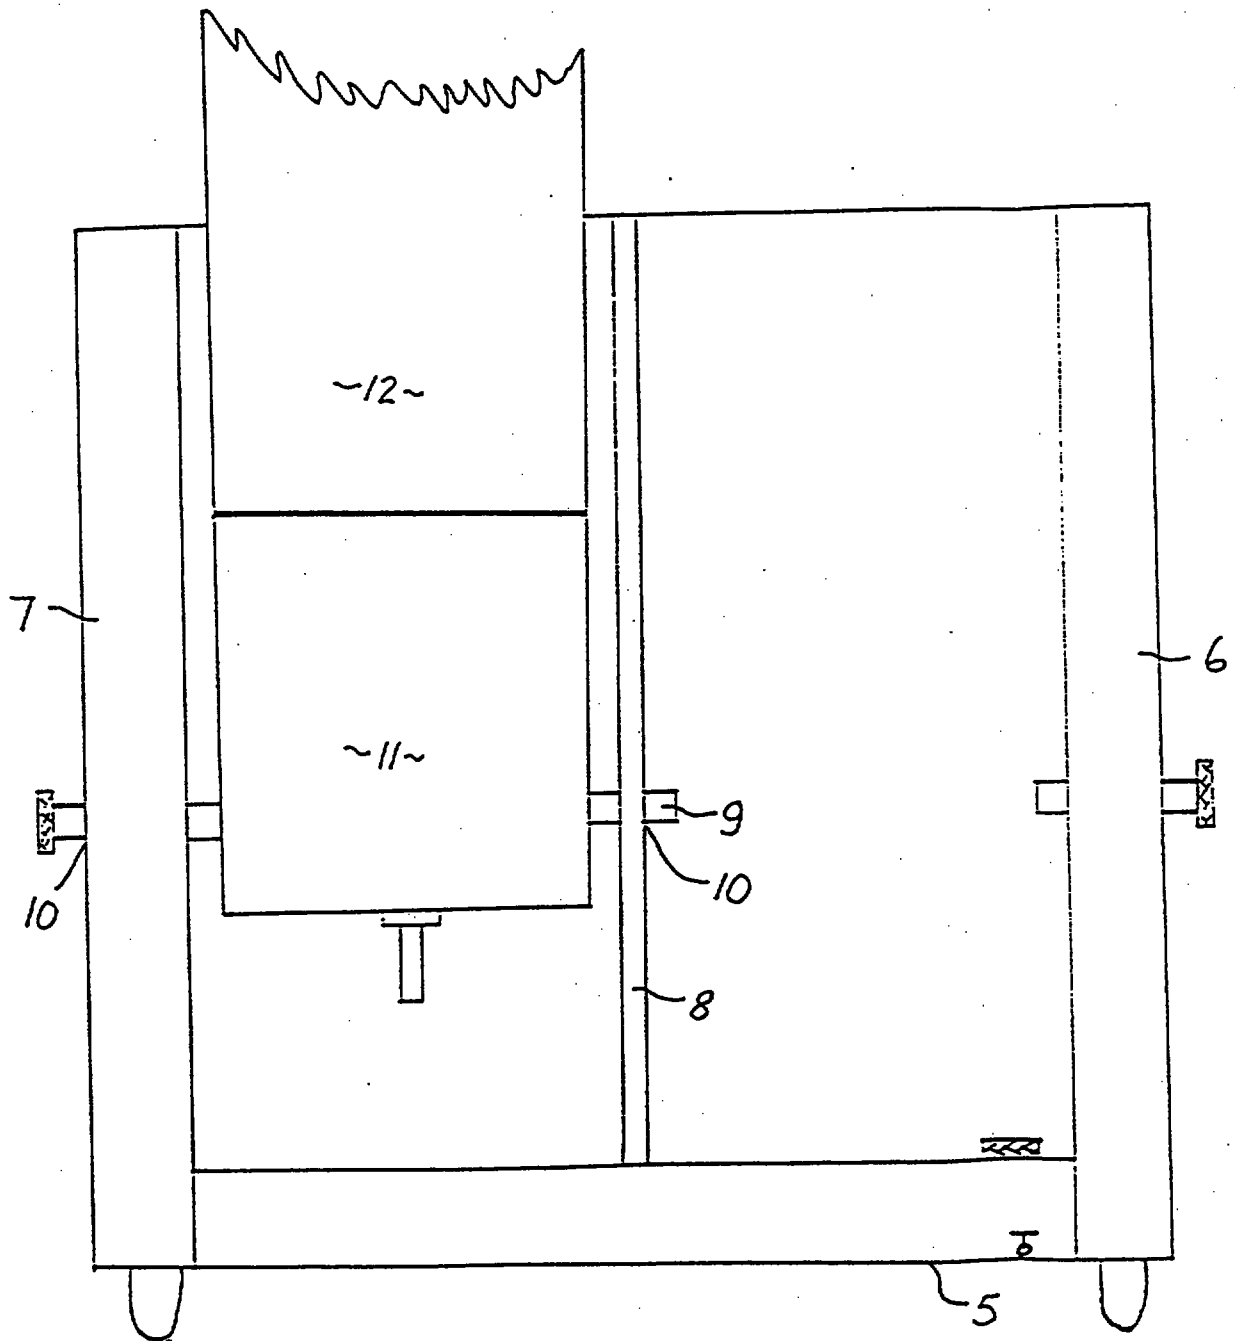


Fig. 1

Fig. 2

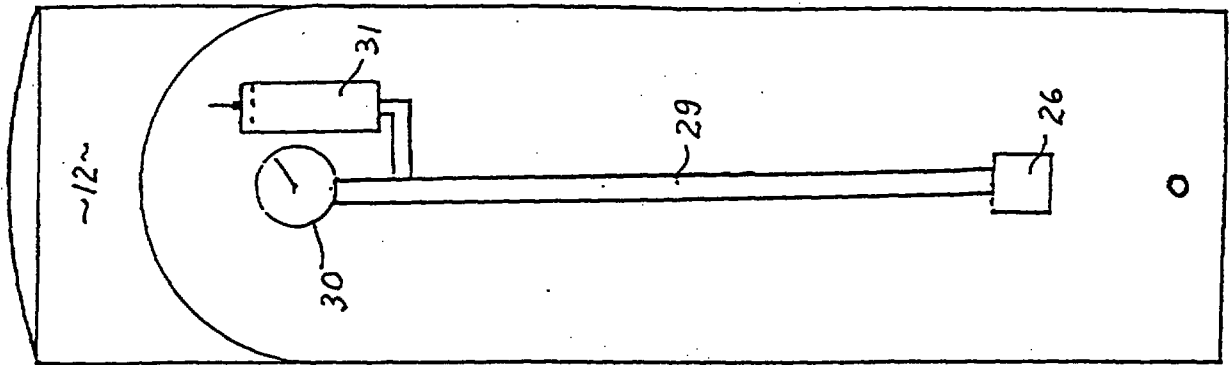


Fig. 3

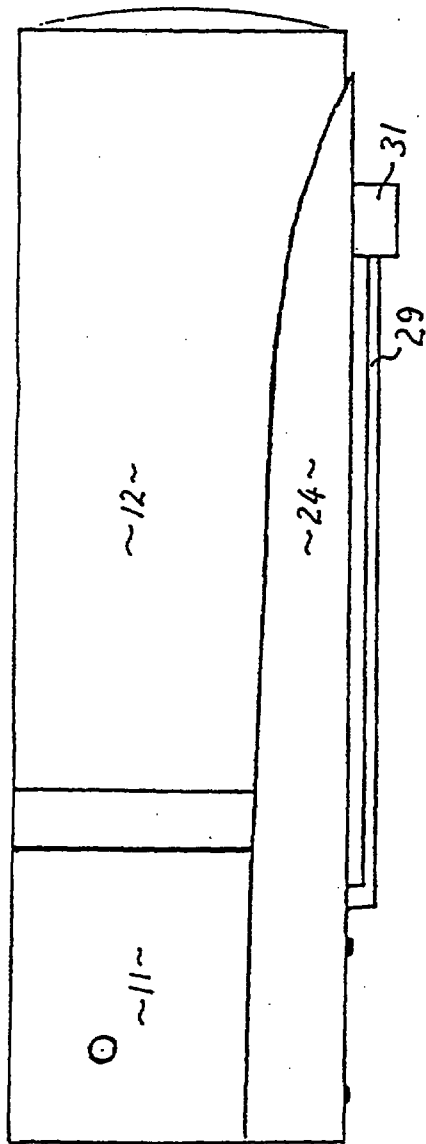


Fig. 4

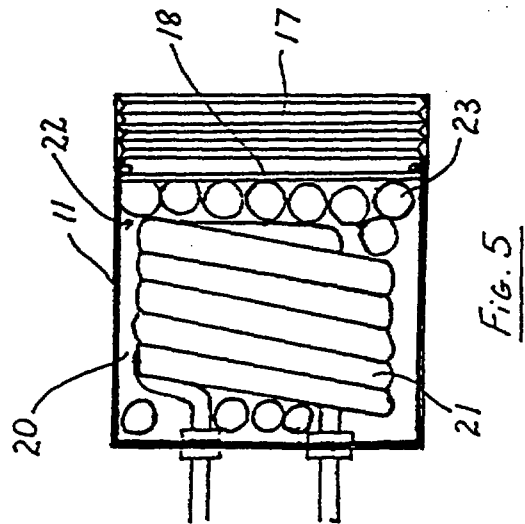


Fig. 5

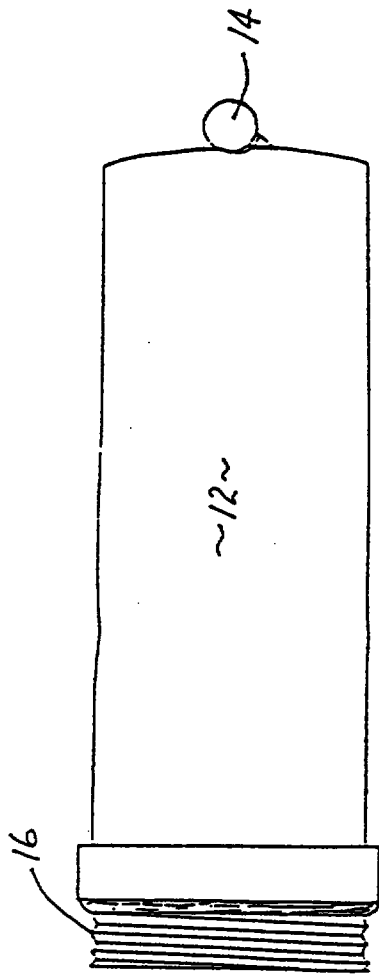


Fig. 6

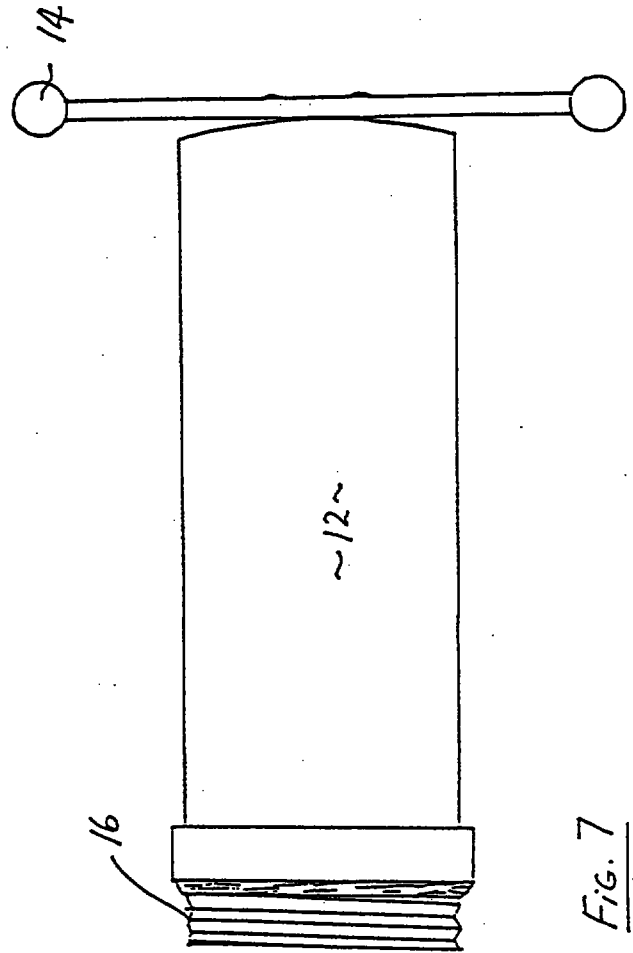
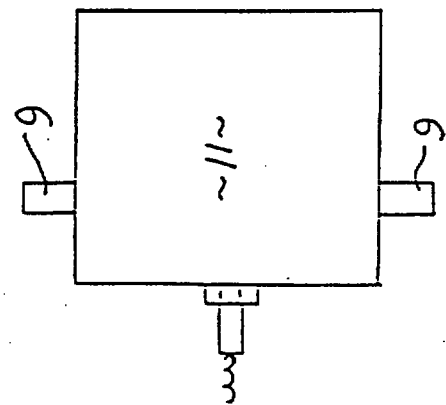
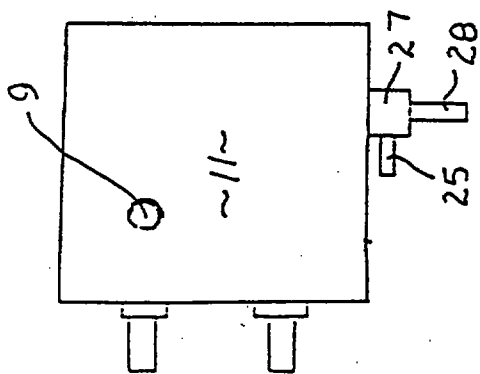


Fig. 7





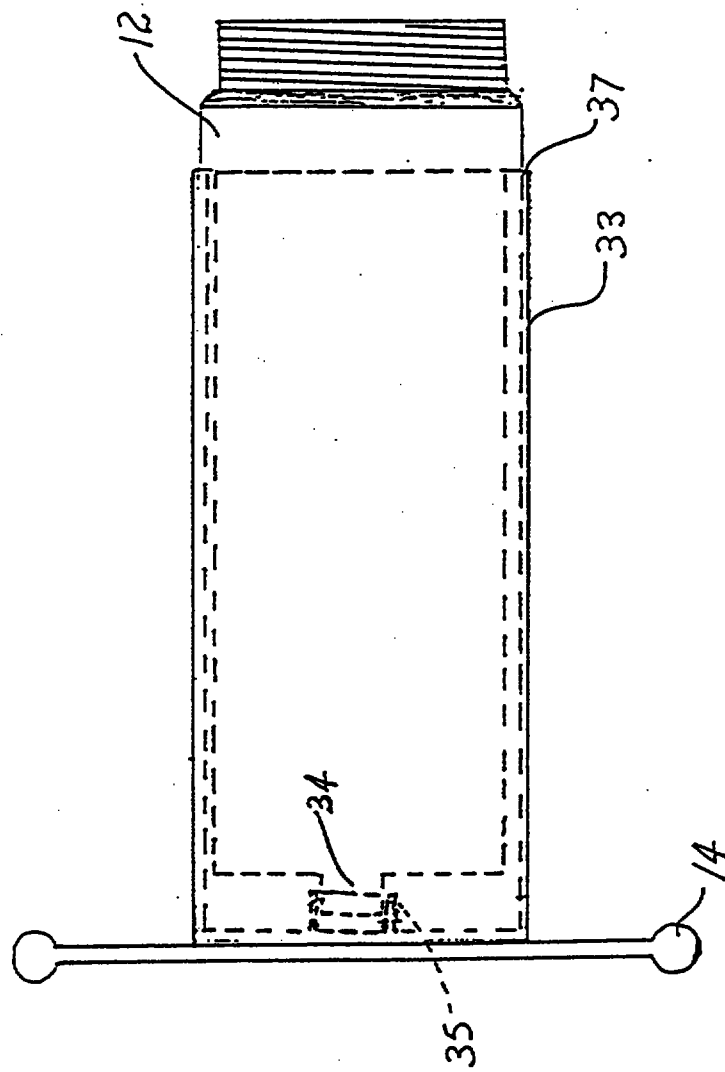


Fig. 8

Fig. 9

THIS SHEET HAS BEEN
REPLACED

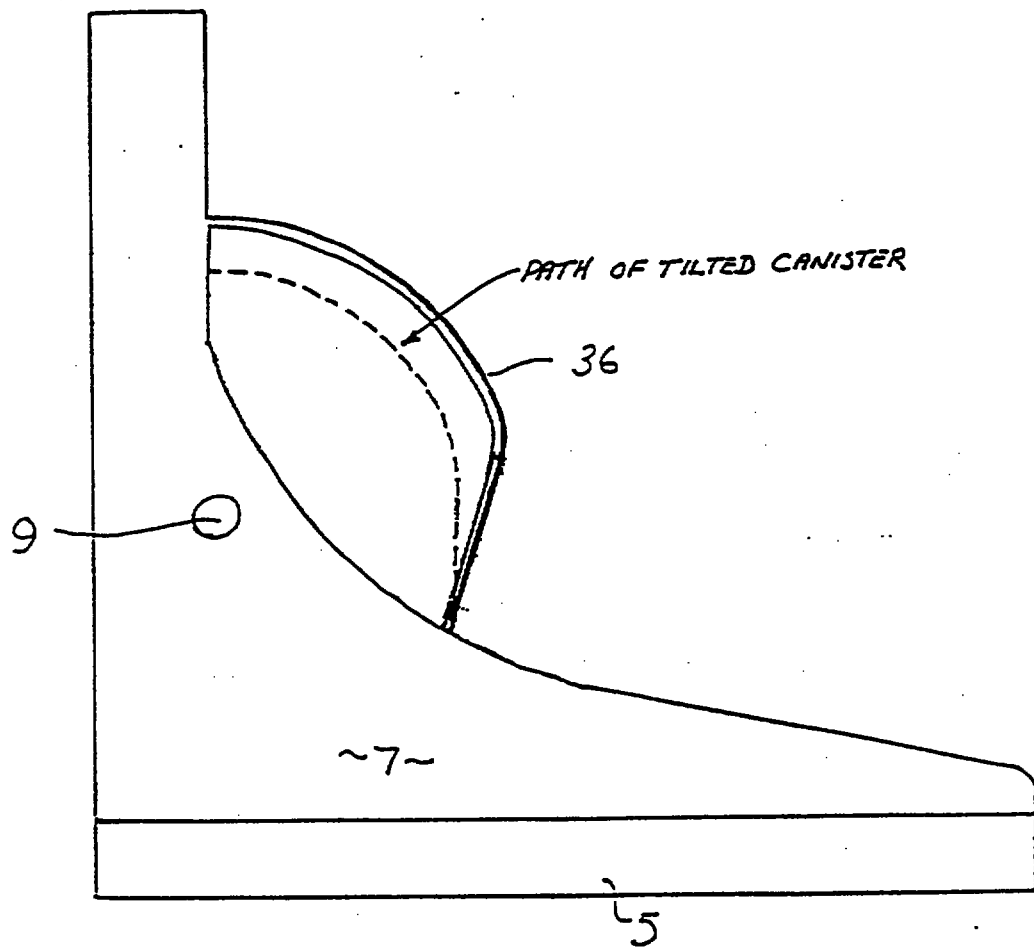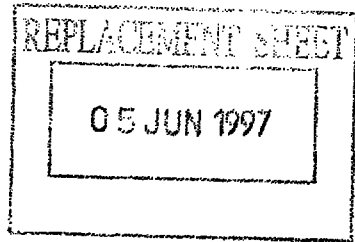

ABSTRACT

STERILISER

A steriliser comprising a head (11) and a detachable container (12) sealingly engageable therewith to provide a pressure-resistant chamber. The head (11) having mounted therein a heating element (21). The head (11) is pivotally mounted to a frame (5,8) such that the steriliser may be selectively moved between a horizontal inoperative position and a vertical operative position with the container (12) extending upwardly from the head (11). The water or sterilising fluid are brought into contact with the heating element (21) when the steriliser is moved to said operative position so as to cause the fluid to vaporize and pressurize the chamber resulting in articles positioned in the chamber being sterilised.

FIGURE.1

This Sheet Has Been Replaced



- 1 -

REPLACEMENT SHEETS		SG
☒	Description : paged .1. to paged .7.	
☒	Claim(s) : paged .8. to paged .9.	
☐	Drawing(s) : paged to paged	
☒	Abstract : paged .10. to paged .11.	
DATE OF RECEIPT ..17/8/99.....		

TITLE: STERILISER

TECHNICAL FIELD

The present invention relates to sterilisers, in particular, to instrument sterilisers used in dental surgeries.

5

BACKGROUND ART

At present dental instruments are sterilised by either boiling, autoclaving or chemical means. Autoclaving is generally accepted as the most effective means available. Chemical sterilisation is time consuming and reserved generally for items which will not survive autoclaving.

10

The real and imagined problems relating to the transmission of AIDS and hepatitis B have focussed attention on the dental handpiece which often only receives a quick wipe with alcohol. It is generally accepted that health authorities will in the near future require everything which is used in a patient's mouth to be autoclaved.

The high cost of dental handpieces makes it important to have a fast turnover through the autoclave. At present, a good autoclave cycles in about 12 minutes.

This is the replacement sheet

Date: 17 AUG 1999

Therefore, if a handpiece misses one cycle, it will not be ready for use for 24 minutes. Understandably, such a down-time would be unacceptable in most busy dental surgeries.

The present invention seeks to overcome these problems by providing a
5 simple, inexpensive steriliser with a rapid cycle time.

DISCLOSURE OF THE INVENTION

According to the present invention provides a steriliser comprising a head and a detachable container sealingly engageable therewith to provide a pressure-resistant chamber, heating means mounted in the head, control means coupled to the heating
10 means for controlling the operation of the heating means to maintain its temperature within a predetermined range, heat sink means provided in the head surrounding the heating means, and means for bringing a predetermined volume of water or sterilising fluid into contact with the heating means and/or the heat sink means.

For preference, the head is provided with a controllable valve means
15 communicating with the chamber to control the fluid pressure therein. In one particular preferred form the head is pivotally mounted to a frame such that the chamber may be selectively moved between a horizontal inoperative position and a vertical operative position with the container extending upwardly from the head.

Preferably, the heating means is a thermostatically controlled electric heating
20 element.

This is the replacement sheet

Date: 17 AUG 1999

BRIEF DESCRIPTION OF THE DRAWINGS

A preferred embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 shows a side elevation of the steriliser according to one embodiment
5 of the invention;

Figure 2 shows an end elevation of the steriliser shown in Figure 1;

Figure 3 shows an end elevation of the canister and head of Figure 1 in the operative vertical position;

Figure 4 shows a side elevation of the canister and head of Figure 3;

10 Figure 5 shows a section view of the head of Figure 3;

Figure 6 shows a side elevation of the canister and head in a separated position;

Figure 7 shows a plan view of the canister and head of Figure 6;

Figure 8 shows a side elevation of a further embodiment of the canister
15 arrangement according to the invention; and

Figure 9 shows a side elevation of the support used for the canister arrangement of Figure 8.

BEST MODE FOR CARRYING OUT THE INVENTION

Referring to the drawings, a preferred embodiment of the invention will be
20 now described. The steriliser comprises a base frame 5, having two side support frames 6 and 7 and a central support frame 8 extending vertically from the base frame 5. The support frames are journaled to receive a pivot axle 9 which passes through holes 10 in the support frames. The pivot axle 9 serves to pivot mount a head 11 of

This is the replacement sheet

Date: 17 AUG 1999

the steriliser to the base frame 5. The base frame shown accommodates two heads and it will be appreciated that the frame could be designed to accommodate any desired number of heads. The head 11 has screw mounted thereto an instrument receiving canister 12 having at its end 13 remote from the screw mounting a handle 14 to assist
5 fitting and removal of the canister 12 from the head 11. The base frame 5 is further provided with an integral water tank and condenser 19.

Further details of the head and canister will be described with particular reference to Figures 3 to 7 of the accompanying drawings. The canister 12 is in the form of a cylinder having one end closed and the other open to receive items to be
10 sterilised. The open end 15 is provided with an external screw thread 16 for engaging an internal thread 17 provided in the opening of the head 11. A pressure seal 18 is provided in the head 11 to form a pressure tight seal when the canister thread 16 is fully tightened into the head thread 17.

The head 11 is generally cylindrical in shape, having an internal cavity 20 into
15 which is mounted a heating element 21. The heating element 21 is surrounded by a heat sink 22 which, in this embodiment, comprises a number of bronze balls 23 which are packed around the heating element 21. It will be appreciated that the heat sink can take other forms, such as metal rods, drilled solid bodies, granules of other suitable metals or the like. The canister 12 is supported on a shaped support ramp 24
20 extending from the head 11. This ramp 24 assists in support and correct fitting of the canister 12 to the head 11 when one is being screwed to the other. The head 11 is provided with two outlet ports 25 and 26. One of the ports 25 has a pressure relief valve 27 operable by control button 28 for selectively opening the port 25. The other

This is the replacement sheet

Date: 17 AUG 1999

port 26 is connected by a tube 29 to a pressure gauge 30 and safety relief valve 31 mounted on the underside of the support ramp 24. The port 25 is connected by a flexible tube 32 to a condenser coil (not shown) positioned in the water tank 19.

In use, the heating element 21 is maintained in a preselected temperature range
5 by a thermostatic control of the electric current feed to the element 21. The element 21 may also be controlled by a pressure switch which deactivates the element when a desired pressure is reached within the head. The element remains on throughout the day with heat loss limited by a cap which may be fitted to the head in the absence of the canister. The element cycles within a preset temperature range.

10 To sterilise an item, the canister 10 is unscrewed from the head 11 and the item to be sterilised placed in the canister 12 with a predetermined amount of water. The canister 12 is then screwed into the head 11 while resting in a generally horizontal position as shown in Figure 1. The canister 12 is then pivotted about the axle 9 to a vertical position causing the water to contact the heating element 21 and heat sink 22
15 resulting in the production of steam, pressure and temperature within the canister 12. The pressure being controlled by the pressure release valve or the safety valve 26. Once the autoclaving has been completed, the canister is lowered to the horizontal position which activates the pressure relief valve on the head via control button 28, resulting in the internal pressure being totally released and the steam passing into the
20 condenser coil via tube 32. The sterilised item may then be removed by unscrewing the canister 12.

In a further preferred form of the invention shown in Figures 8 and 9, the canister 12 is surrounded by a sleeve 33. The closed end of the canister 12 is provided

This is the replacement sheet

Date: 17 AUG 1999

with a shaped protrusion or boss 34 which engages with a complementary shaped recess 35 on the inner side of the closed end of the sleeve 33. When engaged the boss 34 and recess 35 prevent relative rotational movement between the sleeve 33 and the canister 12 so that the handle 14 on the sleeve 33 may be used to screw the canister 12 into engagement with the head 11. The sleeve 33 fits over the canister 12 with a small air gap and serves to insulate the canister 12 against heat loss or burns and to act as a handle for the canister 12.

To prevent unintentional opening of the canister 12 during operation, the frame 5 is provided with a guide rail 36 which engages with the outer edge 37 of the open end of the sleeve 33 and acts to slide the sleeve 33 and its associated boss 34 out of engagement with the recess 35 as the canister is raised to its operative position. This disengagement of the sleeve from the canister prevents unintentional opening of the canister during the sterilising operation.

It will be appreciated that water or sterilising fluid may be introduced into contact with the heating element by any suitable means, for example the head could remain in a fixed position and fluid could be injected into contact with the heating element using a pump. Alternately, the head may be provided with a fluid reservoir having a spring-loaded push valve connecting the reservoir to the interior of the head. A screw cap on the reservoir, on being tightened, depresses the push valve to cause fluid to enter the head and contact the heating element. The valve closes automatically under force of the internal pressure and the spring.

It will be further appreciated that other embodiments of the invention are possible without departing from the spirit or scope of the invention described and the

This is the replacement sheet

Date: 17 AUG 1999

- 7 -

invention is not limited to the specific embodiment described or in its application to dental instruments.

This is the replacement sheet

Date: 17 AUG 1999

CLAIMS

1. A steriliser comprising a head and a detachable container sealingly engageable therewith to provide a pressure-resistant chamber, heating means mounted in the head, control means coupled to the heating means for controlling the operation of the heating means to maintain its temperature within a predetermined range, heat sink means provided in the head surrounding the heating means, and means for bringing a predetermined volume of water or sterilising fluid into contact with the heating means and/or the heat sink means.
2. A steriliser according to claim 1 wherein the head is mounted to a frame by a pivotal mounting such that the chamber may be selectively moved between a horizontal inoperative position and a vertical operative position with the container extending upwardly from the head.
3. A steriliser according to claim 2 wherein the pivotal mounting constitutes the said means by which the water or sterilising fluid is brought into contact with the heating means and/or the heat sink means, this occurring when the chamber is moved to the said operative position.
4. A steriliser according to claim 2 or 3, wherein the head is provided with a controllable valve means communicating with the said chamber to control the fluid pressure therein.
5. A steriliser according to claim 4 wherein said controllable valve means is operable, in response to said chamber moving from said operative position to said inoperative position, to release the fluid pressure within said chamber.



This is the replacement sheet

Date: 17 AUG 1999

6. A steriliser according to claim 4 or 5 including condenser means coupled to the valve means for condensing fluid released from the chamber.
7. A steriliser according to any of claims 2 to 6 further including means for preventing removal of the container from the head when the chamber is in the said operative position.
8. A steriliser according to claim 7 wherein the container and head are engaged by means of complimentary screw threads and the said means for preventing removal comprises an outer sleeve surrounding the container and selectively engageable therewith, the outer sleeve being engaged with the container when the chamber is in the inoperative position to allow the container to be rotated by the outer sleeve and removed from the head, whereas when the chamber is in the operative position, means are provided for disengaging the outer sleeve from the container and allowing the outer sleeve to move freely relative to the container and prevent rotation of the container by the outer sleeve.
9. A steriliser substantially as hereinbefore described with reference to Figures 1 to 7 or Figures 8 and 9 of the accompanying drawings.



This is the replacement sheet

Date: 17 AUG 1999

ABSTRACT

Steriliser

A steriliser comprising a head (11) and a detachable container (12) sealingly engageable therewith to provide a pressure-resistant chamber. The head (11) having mounted therein a heating element (21). The head (11) is pivotally mounted to a
5 frame (5,8) such that the steriliser may be selectively moved between a horizontal inoperative position and a vertical operative position with the container (12) extending upwardly from the head (11). The water or sterilising fluid are brought into contact with the heating element (21) when the steriliser is moved to said operative position so
10 as to cause the fluid to vaporize and pressurize the chamber resulting in articles positioned in the chamber being sterilised.

Figure 1

This is the replacement sheet

Date: 17 AUG 1999