



- (51) **International Patent Classification:**
E21B 33/06 (2006.01) *E21B 33/064* (2006.01)
- (21) **International Application Number:**
PCT/US2014/054007
- (22) **International Filing Date:**
4 September 2014 (04.09.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14/017,891 4 September 2013 (04.09.2013) US
- (71) **Applicant:** TRENDSETTER ENGINEERING, INC.
[—/US]; 10430 Rodgers Road, Houston, TX 77070 (US).
- (72) **Inventor:** COX, Brent; 10430 Rodgers Road, Houston, TX 77070 (US).
- (74) **Agent:** EGBERT, John, S.; Egbert Law Offices, PLLC, 1314 Texas Avenue, 21st Floor, Houston, TX 77002 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** CAPPING STACK FOR USE WITH A SUBSEA WELL

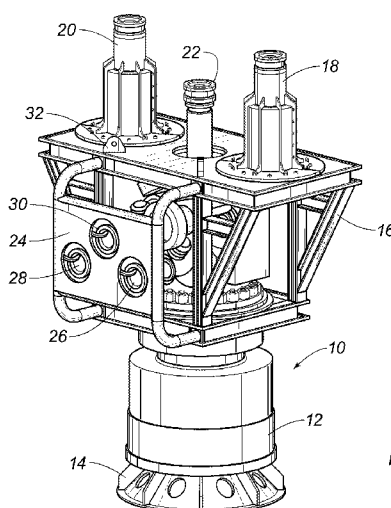


FIG. 1

(57) **Abstract:** A capping stack (10) for use with a subsea well has a body (12) with a flow passageway (34) extending therethrough, a first bore (44) having one end opening to an outlet end of the flow passageway (34), a second bore (46) opening to the outlet end of the flow passageway (34), a first flowline (18) affixed to the first bore and extending upwardly therefrom, a second flowline (20) affixed to the second bore and extending upwardly therefrom, a first valve (48) cooperative with the first flowline (18) so as to be movable between an open position and a closed position, and a second valve (50) cooperative with the second flowline (20) so as to be movable between an open position and a closed position. The inlet end of the flow passageway is suitable for connection to a blowout preventer or to a wellhead of a subsea well. Each of the bores extends upwardly at an acute angle to vertical from the flow passageway.