

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/021381 A3

(51) International Patent Classification⁷: **H01H 25/00**

David [FR/FR]; 5420 West U.S. Highway 34, Loveland, CO 80537 (US). **HOWARD COUGHENOUR, James** [US/US]; 2916 Ringneck Drive, Fort Collins, CO 80526 (US).

(21) International Application Number:
PCT/IB2003/003416

(22) International Filing Date: 21 August 2003 (21.08.2003)

(74) Agents: **BLOT, Philippe** et al.; 2, Place d'Estienne d'Orves, F-75441 PARIS CEDEX 09 (FR).

(25) Filing Language: English

(81) Designated States (*national*): CA, CN, JP, KR, SG, US, ZA.

(26) Publication Language: English

(30) Priority Data:
02 10699 28 August 2002 (28.08.2002) FR

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(71) Applicant (*for all designated States except US*): **ITT MANUFACTURING ENTERPRISES, INC** [US/US]; 1105 North Market Street, Suite 1217, Wilmington, DE 19801 (US).

Published:
— with international search report


(72) Inventors; and

(88) Date of publication of the international search report:
22 April 2004

(75) Inventors/Applicants (*for US only*): **BRICAUD, Hervé** [FR/FR]; 166, avenue Eisenhower, F-39100 DOLE (FR). **PIZARD, Yves** [FR/FR]; 106 avenue Georges Pompidou, F-39100 DOLE (FR). **WICKER THOMPSON,**

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MULTIPLE SWITCHING DEVICE

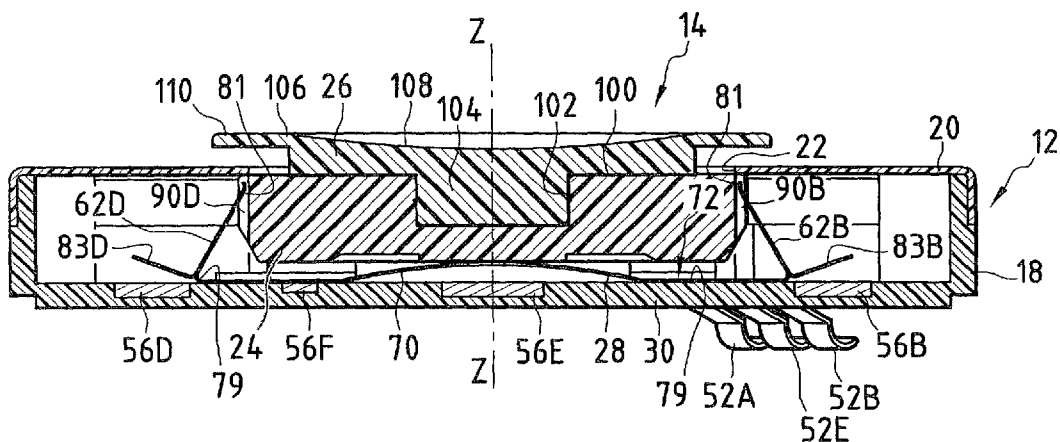

(57) Abstract: The multiple switching device (10) comprises: a casing (12); at least two contacts which are each formed by a conductive stud (56B, 56D) carried by the casing (12) and an associated movable conductive finger (83B, 83D); an operating member (14) for controlling the movable fingers (83B, 83D), which operating member can be moved relative to the casing (12) from a rest position into at least two separate selection positions; and resilient means for biasing the operating member (14) towards the rest position thereof. The operating member (14) can be moved slidingly relative to the casing (12) in order to switch each of the contacts.

WO 2004/021381 A3