(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
24 December 2008 (24.12.2008)

PCT

(10) International Publication Number
WO 2008/157717 A1

(51) International Patent Classification:
H04Q 7/38 (2006.01)

(21) International Application Number:
PCT/US2008/067535

(22) International Filing Date: 19 June 2008 (19.06.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/945,070	19 June 2007 (19.06.2007)	US
12/141,823	18 June 2008 (18.06.2008)	US

(71) Applicant *(for all designated States except US)*: **QUALCOMM Incorporated** [US/US]; Attn: International IP Administration, 5775 Morehouse Drive, San Diego, California 92121 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **KITAZOE, Masato** [JP/US]; 5775 Morehouse Drive, San Diego, California 92121 (US). **HO, Sai, Yiu, Duncan** [CA/US]; 5775 Morehouse Drive, San Diego, CA 92121 (US).

(74) Agent: **JUNEAU, Darrell Scott**; Attn: International IP Administration, 5775 Morehouse Drive, San Diego, Califonia 92121 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: DELIVERY OF HANDOVER COMMAND

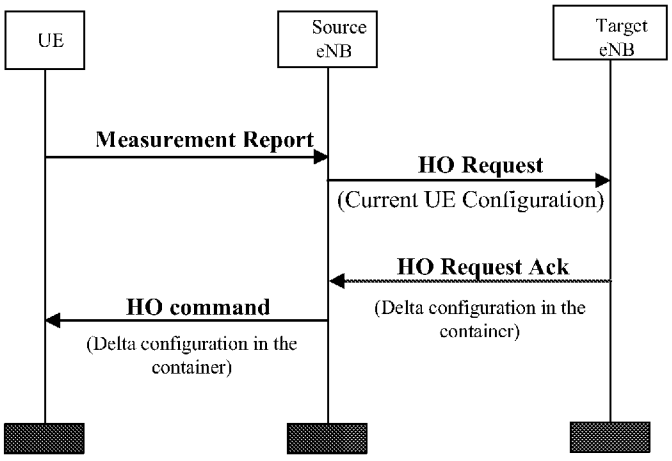


FIG. 5

(57) Abstract: A delta configuration is transmitted to a UE requesting a handover wherein the delta configuration details changes that are required for the current UE configuration in order to execute the handover. The handover is initiated via a measurement report transmitted to a currently serving source eNode B from the UE. The measurement report can comprise one or more of current radio conditions, current UE configuration or a preferred target eNode B if the handover is a inter eNode B handover. In a inter eNB handover, the current UE configuration is forwarded to the preferred target eNode B by the source eNode B. The target eNode B generates the delta configuration and transmits it to the source eNode B in a transparent container which is subsequently forwarded to the UE.

WO 2008/157717 A1

FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*