

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
23 January 2025 (23.01.2025)



(10) International Publication Number
WO 2025/018936 A1

(51) International Patent Classification:
F41A 21/32 (2006.01)

(21) International Application Number:
PCT/SG2023/050504

(22) International Filing Date:
18 July 2023 (18.07.2023)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **EASEBON SERVICES LIMITED** [CN/CN];
Suite 5, 2/F, Kwong Sang Hong Centre, 151 Hoi Bun Road,
Kwun Tong, Hong Kong (CN).

(72) Inventor; and

(71) Applicant: **CHIA, Francis, See Chong** [SG/CN]; 17
Kadoorie Avenue, Kowloon, Hong Kong (CN).

(72) Inventors: **YUM, Wing Tai**; Flat 14, 4/F, Block A, Kai
Cheung Court, Diamond Hill, Kowloon, Hong Kong (CN).

CHIU, Yiu Fai; Flat B, 7/F, Yuet Bor Building, 16 Shun
Fong Street, Kwai Chung, NT., Hong Kong (CN).

(74) Agent: **AMICA LAW LLC**; 77 Robinson Road, #22-01
Robinson 77, Singapore 068896 (SG).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,

(54) Title: TOY LAUNCHER SCAR BARREL AND METHOD OF MAKING THE SAME

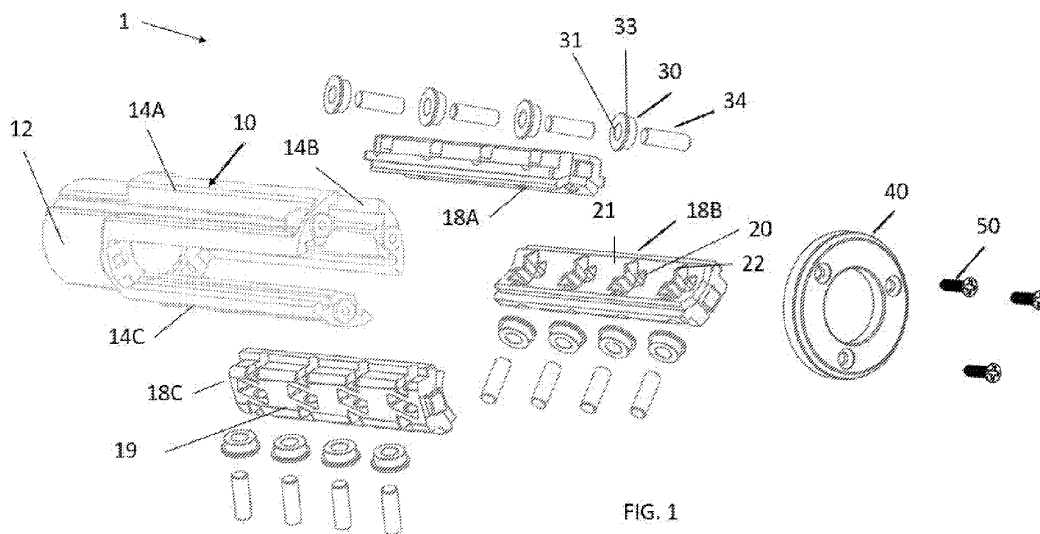


FIG. 1

(57) Abstract: A device for attachment to a muzzle of a projectile launcher. The device includes a hollow main housing with a plurality of arms extending from the proximal end portion to the distal end portion of the main housing. A plurality of plates are configured to extend between the plurality of arms of the main housing. Each plate includes first openings that extend through a thickness of the plate and second openings that extend across a width of the plate. Rollers are disposed within the first openings and pins are disposed within the second openings, with each pin inserted through a center opening of a corresponding roller. In exemplary embodiments, the separate plates and arms are combined into a unitary structure with sections that hold the rollers and pins, and cover plates or a housing are disposed over the unitary structure.

[Continued on next page]

WO 2025/018936 A1

SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*