



(51) International Patent Classification:

A61M 5/50 (2006.01) A61M 5/32 (2006.01)

(21) International Application Number:

PCT/EP2011/060320

(22) International Filing Date:

21 June 2011 (21.06.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10168319.1 2 July 2010 (02.07.2010) EP

(71) Applicant (for all designated States except US):

SANOFI-AVENTIS DEUTSCHLAND GMBH
[DE/DE]; Brüningstraße 50, 65929 Frankfurt (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ROBERTS, Gareth

[GB/GB]; Glendale, Pen-y-cae Road, Ruabon, Wrexham
LL14 6EB (GB). WARD, Chris [GB/GB]; 31 Princes
Avenue, Denbighshire, Prestatyn Denbighshire LL19
8RW (GB). EKMAN, Matthew [GB/GB]; 59 Ecton Av-
enue, Cheshire, Macclesfield Cheshire SK10 1RD (GB).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: SAFETY DEVICE FOR A PRE-FILLED SYRINGE AND INJECTION DEVICE

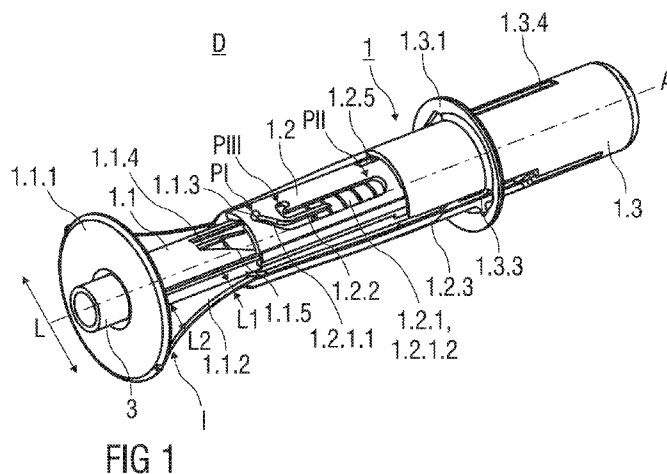

(57) **Abstract:** According to the invention a safety device (1) for a pre-filled syringe (2) comprises a substantially cylindrical and hollow support body (1.2) and a hollow needle shield (1.1) slideably arranged relative to the support body (1.2). The support body (1.2) comprises at least one resilient arm (1.2.3) and the hollow needle shield (1.1) or a needle shield assembly comprises at least one curved actuation ramp (1.1.2). The curved actuation ramp (1.1.2) protrudes in a lateral direction (L) perpendicular to a central axis (A) of the safety device (1). The curved actuation ramp (1.1.2) comprises a first lateral dimension (L1) at a proximal end of the needle shield (1.1) and a second lateral dimension (L2) exceeding the first lateral dimension (L1) at a distal end of the needle shield (1.1). The resilient arm (1.2.3) engages the curved actuation ramp (1.1.2) when the needle shield (1.1) is slid relative to the support body (1.2).

