

TITLE OF THE INVENTION:

CHEMICAL MECHANICAL PLANARIZATION (CMP) COMPOSITION AND METHODS THEREFORE FOR COPPER AND THROUGH SILICA VIA (TSV) APPLICATIONS

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. provisional application 62/546,914 filed on August 17, 2017, the entire contents of which is incorporated herein by reference thereto for all allowable purposes.

BACKGROUND OF THE INVENTION

[0002] This invention relates generally to the chemical-mechanical planarization or chemical-mechanical polishing (CMP) of semiconductor wafers. More specifically, present invention relates to high and tunable removal rates and low dishing formulations for the broad or advanced node copper or Through Silica Via (TSV) CMP applications. CMP polishing formulations, CMP polishing compositions or CMP polishing slurries are interchangeable in present invention.

[0003] Copper is the current material of choice for interconnect metal used in the fabrication of integrated electronic devices due to its low resistivity, high reliability, and scalability. Copper chemical mechanical planarization processes are necessary to remove copper overburden from inlaid trench structures while achieving global planarization with low metal loss.

[0004] With advancing technology nodes the need to reduce metal dishing and metal loss becomes increasingly important. Any new polishing formulations must also maintain high removal rates, high selectivity to the barrier material and low defectivity.

[0005] Copper CMP have been done in the prior arts, for example, in. US9,305,806; US20160314989; US20130092651; US 20130078811; US 8,679,980; US 8,791,019; US 8,435,421; US 7,955,520; US 20130280910; US 20100221918; US 8,236,695; TW I385226; US 20120094490; US 7,955,520; US US20040175942, US6773476, and US8236695.

[0006] However, the disclosed formulations were unable to meet the performance requirements of high removal rates and low dishing which become more and more challenging for advanced technology nodes.

[0007] This invention discloses bulk copper CMP polishing formulations developed to meet challenging requirements of low dishing and high removal rates for the advanced technology nodes.

BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS

[0008] Figure 1 shows Cu polishing results of formulations with single, dual and tris chelators

[0009] Figure 2 shows Cu dishing results of formulations with single, and tris chelators

[0010] Figure 3 shows Cu dishing results of formulations with tris chelators with and without choline bicarbonate

[0011] Figure 4 shows Cu defect count results of formulations with single, dual and tris chelators (0.2 μ m)

BRIEF SUMMARY OF THE INVENTION

[0012] Described herein are CMP polishing compositions, methods and systems for the copper or Through Silica Via (TSV) CMP applications.

[0013] In one aspect, the invention herein provides a copper bulk chemical mechanical polishing (CMP) or Through Silica Via (TSV) composition comprises:

- a) abrasive;
- b) tris chelators;
- c) corrosion inhibitor;
- d) organic quaternary ammonium salt;
- e) oxidizing agent;
- f) biocide; and
- g) water; optionally
- h) pH adjusting agent;

wherein

the tris chelators are selected from the group consisting of amino acids, amino acid derivatives, organic amine, and combinations therefor; wherein at least one chelator is an amino acid or an amino acid derivative; and

the pH of the composition is from 3.0 to 12.0; preferably from 5.5 to 7.5; and more preferably from 7.0 to 7.35.

[0014] In another aspect, the invention provides a method of chemical mechanical polishing at least one copper or copper-containing surface of a semiconductor substrate, using a chemical mechanical polishing or Through Silica Via (TSV) composition comprising steps of:

1. providing the semiconductor substrate;
2. providing a polish pad;
3. providing the chemical mechanical polishing or Through Silica Via (TSV) composition comprising
 - a) abrasive;
 - b) tris chelators;
 - c) corrosion inhibitor;
 - d) organic quaternary ammonium salt;
 - e) oxidizing agent;
 - f) biocide; and
 - g) water; optionally
 - h) pH adjusting agent;

wherein

the tris chelators are selected from the group consisting of amino acids, amino acid derivatives, organic amine, and combinations therefor; wherein at least one chelator is an amino acid or an amino acid derivative; and

the pH of the composition is from 3.0 to 12.0; preferably from 5.5 to 7.5; and more preferably from 7.0 to 7.35;

4. contacting the at least one copper or copper-containing surface with the polish pad and the chemical mechanical polishing composition; and
5. polishing the at least one copper or copper-containing surface;

wherein at least a portion of the surface is in contact with both the polishing pad and the chemical mechanical polishing composition.

[0015] In yet another aspect, the invention provides a method of a selective chemical mechanical polishing comprising steps of:

- a) providing a semiconductor substrate having at least one surface containing a first material and at least one second material;
- b) providing a polishing pad;
- c) providing a chemical mechanical polishing or Through Silica Via (TSV) composition comprising
 - 1) abrasive;
 - 2) tris chelators;
 - 3) corrosion inhibitor;
 - 4) organic quaternary ammonium salt;
 - 5) oxidizing agent;
 - 6) biocide; and
 - 7) water; optionally
 - 8) pH adjusting agent;

wherein

the tris chelators are selected from the group consisting of amino acids, amino acid derivatives, organic amine, and combinations thereof; wherein at least one chelator is an amino acid or an amino acid derivative; and

the pH of the composition is from 3.0 to 12.0; preferably from 5.5 to 7.5; and more preferably from 7.0 to 7.35; and the pH of the Cu polishing compositions is from about 3.0 to about 12.0;

- d) contacting the at least one surface with the polish pad and the chemical mechanical polishing composition;
- e) polishing the at least one surface to selectively remove the first material;
 - wherein of removal rate of the first material to removal rate of the second material is equal or greater than 500:1; preferably 1000:1; and more preferably 3000:1; and
 - the first material is copper and the second material is selected from the group consisting of barrier layer such as Ta, TaN, Ti, and TiN film, dielectric layer such as TEOS, low-k, and ultra low-k film.

[0016] In yet another aspect, the invention provides a system of chemical mechanical polishing at least one copper or copper-containing surface of a semiconductor substrate, comprising

1. the semiconductor substrate;
2. a polish pad;
3. a chemical mechanical polishing or Through Silica Via (TSV) composition comprising
 - a) abrasive;
 - b) tris chelators;
 - c) corrosion inhibitor;
 - d) organic quaternary ammonium salt;
 - e) biocide; and
 - f) water; optionally
 - g) pH adjusting agent;

wherein

the tris chelators are selected from the group consisting of amino acids, amino acid derivatives, organic amine, and combinations therefor; wherein at least one chelator is an amino acid or an amino acid derivative; and

the pH of the composition is from 3.0 to 12.0; preferably from 5.5 to 7.5; and more preferably from 7.0 to 7.35;

wherein at least a portion of the at least one copper or copper-containing surface is in contact with both the polishing pad and the chemical mechanical polishing or Through Silica Via (TSV) composition.

[0017] The abrasive particles used for the disclosed herein Cu bulk CMP polishing compositions include, but are not limited to, the following: colloidal silica or high purity colloidal silica; the colloidal silica particles doped by other metal oxide within lattice of the colloidal silica, such as alumina doped silica particles; colloidal aluminum oxide including alpha-, beta-, and gamma-types of aluminum oxides; colloidal and photoactive titanium dioxide, cerium oxide, colloidal cerium oxide, nano-sized inorganic metal oxide particles, such as alumina, titania, zirconia, ceria etc.; nano-sized diamond particles, nano-sized silicon nitride particles; mono-modal, bi-modal, multi-modal colloidal abrasive particles; organic polymer-based soft abrasives, surface-coated or modified abrasives, or other composite particles, and mixtures thereof.

[0018] The organic quaternary ammonium salt, includes but is not limited to choline salt, such as choline bicarbonate salt, or all other salts formed between choline and other anionic counter ions.


[0019] The corrosion inhibitors include but are not limited to family of hetero aromatic compounds containing nitrogen atom(s) in their aromatic rings, such as 1,2,4-triazole, benzotriazole and benzotriazole derivatives, tetrazole and tetrazole derivatives, imidazole and imidazole derivatives, benzimidazole and benzimidazole derivatives, pyrazole and pyrazole derivatives, and tetrazole and tetrazole derivatives.

[0020] The biocide includes but is not limited to Kathon™, Kathon™ CG/ICP II, from Dow Chemical Co. They have active ingredients of 5-chloro-2-methyl-4-isothiazolin-3-one and 2-methyl-4-isothiazolin-3-one.

[0021] The oxidizing agent includes, but is not limited to, periodic acid, hydrogen peroxide, potassium iodate, potassium permanganate, ammonium persulfate, ammonium molybdate, ferric nitrate, nitric acid, potassium nitrate, and mixtures thereof.

[0022] The amino acids and amino acid derivatives included, but not limited to, glycine, D-alanine, L-alanine, DL-alanine, beta-alanine, valine, leucine, isoleucine, phenylamine, proline, serine, threonine, tyrosine, glutamine, asparagine, glutamic acid, aspartic acid, tryptophan, histidine, arginine, lysine, methionine, cysteine, iminodiacetic acid, and combinations thereof.


[0023] The organic amines chelators have general molecular structures, as depicted below:

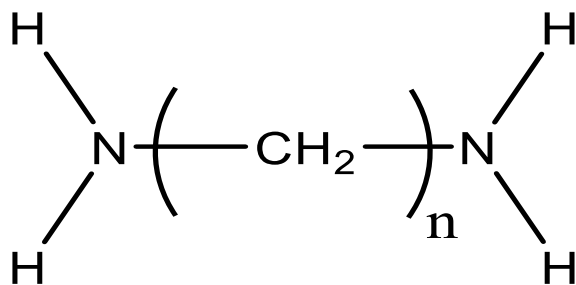

[0024] The organic amine molecules have two primary amine functional groups as terminal groups on both ends of the molecules. *n* is numbered from 2 to 12, such as ethylenediamine with *n* = 2, propylenediamine with *n*=3, butylenediamine with *n*=4, etc.

[0025] The organic diamine compounds with two primary amine moieties can be described as the binary chelating agents.


[0026] The alkyl group which linked to two terminal primary amine functional groups also include the branched alkyl groups, the general molecular structures of these branched alkyl groups are depicted at followings:

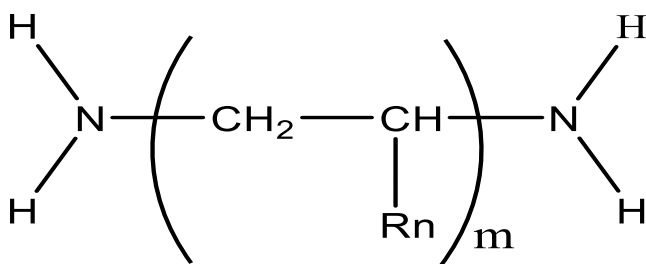


wherein, *R_n* represents an organic alkyl group with *n* carbon atoms in which *n* can be numbered from 1 to 12, *m* has the numbers ranged from 2 to 12.

[0027] The organic diamine molecules can also have the branched alkyl group as the linking group between two terminal primary amine functional groups.

[0028] Another structure of the organic amine molecules is shown below. *R_n* and *R_m* can be the same or different alkyl groups with *n* carbon atoms and *m* carbon atoms, respectively; wherein *n* and *m* can be numbered from 1 to 12. *P* can be numbered from 2 to 12.

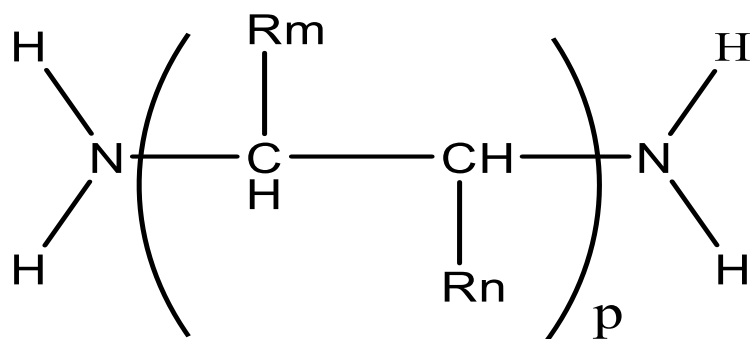


[0029] Another type of the branched alkyl group linker has the following general molecular structure:

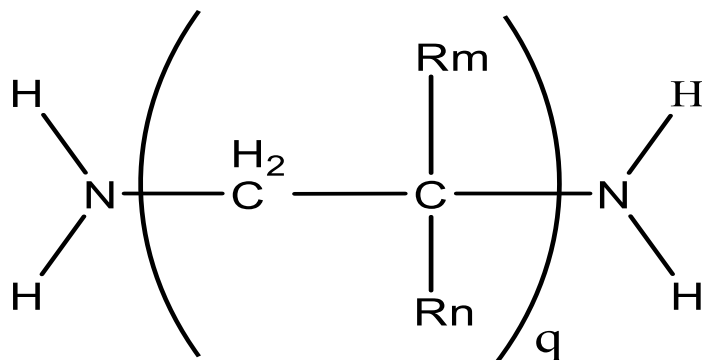

wherein, the Rn and Rm groups are bonded to the same carbon atom. Rn and Rm can be the same or different alkyl groups with n carbon atoms and m carbon atoms, respectively; wherein n and m can be numbered from 1 to 12. q can be numbered from 2 to 12.


[0030] The organic diamine molecules with other molecular structures can be also used as a chelating agent in the invented herein Cu CMP slurries, such as those organic diamine molecules with the following general molecular structures:

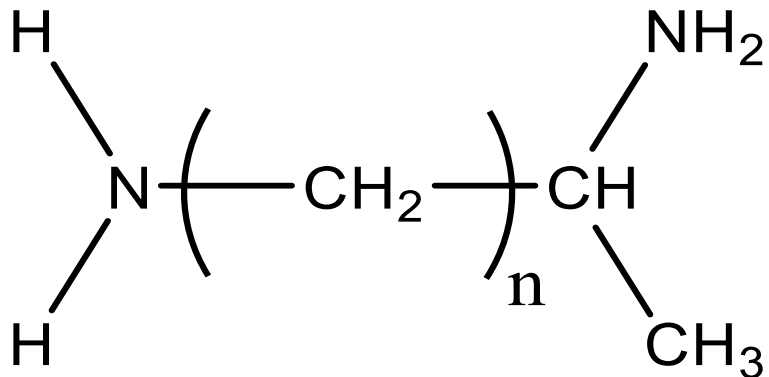


[0031] Such organic diamine molecules can have n numbered from 1 to 12, and can be described as organic diamines with one terminal primary amine functional group and another primary organic amine attached to the beta carbon atoms on the other end of the molecules. Also, the secondary primary amine functional groups can be also bonded to the other carbon atoms at other positions, such as beta, gamma etc. and the first primary amine function group still maintains as the terminal primary amine functional group in the same molecules.

[0032] Any other non-aromatic organic diamine molecules with two primary organic amine groups can be used as one of the three chelating agents in the invented Cu CMP slurries herein.

[0033] Optionally, any aromatic organic molecules with two primary amine functional groups can be used as one of three chelating agents in the invented Cu CMP slurries herein. For example, aromatic organic amines have the general molecular structures as depicted in followings:

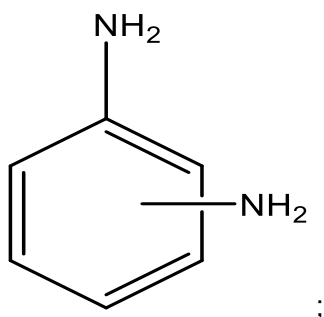

or as followings:

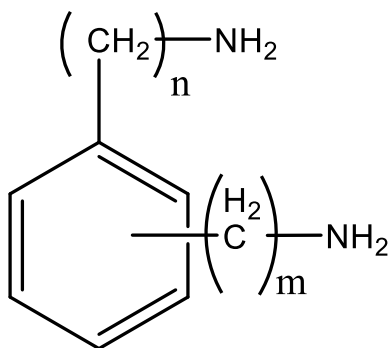

[0034] In the above listed general aromatic organic diamine structures with two primary amine functional groups at ortho or meta positions in which n can be from 1 to 12, and m also can be from 1 to 12, also in the same molecule(s), n can be equal to m. In other cases, n can also be different from m.

DETAILED DESCRIPTION OF THE INVENTION

[0035] As industry standards trend toward smaller device features, there is a continuously developing need for new Cu bulk metal polishing slurries that afford high and tunable Cu removal rates and low Cu dishing for the broad and advanced node applications.

[0036] The copper bulk CMP or Through Silica Via (TSV) polishing compositions described herein satisfy the need for high and tunable Cu film removal rates, for high selectivity between copper and dielectric films, for high selectivity between copper and barrier films, for low and more uniform Cu line dishing across various wide Cu line features, and for better Cu film corrosion protection through using the suitable corrosion inhibitors.

[0037] The Cu CMP polishing compositions comprise tris chelators, i.e. three chelating agents, an organic quaternary ammonium salt as additional Cu dishing and defect reducer, Cu corrosion inhibitor for the efficient Cu corrosion protection, abrasive such as nano-sized high purity colloidal silica, oxidizing agent such as hydrogen peroxide, and water as a solvent.

[0038] The Cu CMP polishing compositions provide high and tunable Cu removal rates, and low barrier film and dielectric film removal rates which provide very high and desirable selectivity of Cu film vs. other barrier films, such as Ta, TaN, Ti, and TiN, and dielectric films, such as TEOS, low-k, and ultra low-k films, and low Cu dishing and more uniform Cu dishing across wide Cu line features.

[0039] The invented herein Cu chemical mechanical polishing compositions also provide no pad stain Cu CMP performances which allow the extended polish pad life and also allow more stable end-point detections.

[0040] The abrasive particles used for the disclosed herein Cu bulk CMP polishing compositions include, but are not limited to, the following: colloidal silica or high purity colloidal silica; the colloidal silica particles doped by other metal oxide within lattice of the colloidal silica, such as alumina doped silica particles; colloidal aluminum oxide including alpha-, beta-, and gamma-types of aluminum oxides; colloidal and photoactive titanium dioxide, cerium oxide, colloidal cerium oxide, nano-sized inorganic metal oxide particles, such as alumina, titania, zirconia, ceria etc.; nano-sized diamond particles, nano-sized silicon nitride particles; mono-modal, bi-modal, multi-modal colloidal abrasive particles; organic polymer-based soft abrasives, surface-coated or modified abrasives, or other composite particles, and mixtures thereof.


[0041] The colloidal silica can be made from silicate salts, the high purity colloidal silica can be made from TEOS or TMOS. The colloidal silica or high purity colloidal silica can have narrow or broad particle size distributions with mono-model or multi-models, various sizes and various shapes including spherical shape, cocoon shape, aggregate shape and other shapes,

[0042] The nano-sized particles also can have different shapes, such as spherical, cocoon, aggregate, and others.

[0043] The Cu bulk CMP polishing compositions of this invention preferably contain 0.0025 wt.% to 25 wt.% abrasives; the preferred concentration of abrasives ranges from 0.0025 wt.% to 2.5 wt.%. The most preferred concentration of abrasives ranges from 0.005 wt.% to 0.15 wt.%.

[0044] An organic quaternary ammonium salt, includes but is not limited to choline salt, such as choline bicarbonate salt, or all other salts formed between choline and other anionic counter ions.

[0045] The choline salts can have the general molecular structures shown below:

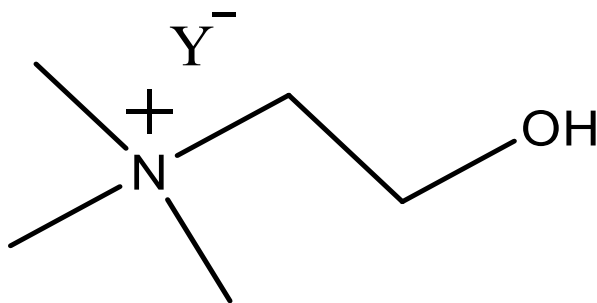

wherein anion Y⁻ can be bicarbonate, hydroxide, p-toluene-sulfonate, bitartate, and other suitable anionic counter ions.

[0046] The CMP slurry contains 0.0005 wt.% to 0.25 wt.% quaternary ammonium salt; the preferred concentration ranges from 0.001 wt.% to 0.05 wt.%; and the most preferred concentration ranges from 0.002 wt.% to 0.01 wt.%

[0047] Various per-oxy inorganic or organic oxidizing agents or other types of oxidizing agents can be used to oxidize the metallic copper film to the mixture of copper oxides to allow their quick reactions with chelating agents and corrosion inhibitors. The oxidizing agent includes, but is not limited to, periodic acid, hydrogen peroxide, potassium iodate, potassium permanganate, ammonium persulfate, ammonium molybdate, ferric nitrate, nitric acid, potassium nitrate, and mixtures thereof. The preferred oxidizer is hydrogen peroxide.

[0048] The CMP slurry contains 0.1 wt.% to 10 wt.% oxidizing agents; the preferred concentration ranges from 0.25wt.% to 3wt.%; and the most preferred concentration ranges from 0.5wt.% to 2.0wt.%

[0049] The corrosion inhibitors used for the disclosed copper bulk CMP slurry can be those prior arts reported corrosion inhibitors. The corrosion inhibitors include, but are not limited to family of hetero aromatic compounds containing nitrogen atom(s) in their aromatic rings, such as 1,2,4-triazole, benzotriazole and benzotriazole derivatives, tetrazole and tetrazole derivatives, imidazole and imidazole derivatives, benzimidazole and benzimidazole derivatives, pyrazole and pyrazole derivatives, and tetrazole and tetrazole derivatives.

[0050] The CMP slurry contains 0.005 wt.% to 0.5 wt.% corrosion inhibitor; the preferred concentration ranges from 0.01 wt.% to 0.1 wt.%; and the most preferred concentration ranges from 0.025 wt.% to 0.05 wt.%

[0051] A biocide having active ingredients for providing more stable shelf time of the invented Cu chemical mechanical polishing compositions can be used.

[0052] The biocide includes but is not limited to Kathon™, Kathon™ CG/ICP II, from Dow Chemical Co. They have active ingredients of 5-chloro-2-methyl-4-isothiazolin-3-one and 2-methyl-4-isothiazolin-3-one.

[0053] The CMP slurry contains 0.0001 wt.% to 0.05 wt.% biocide; the preferred concentration ranges from 0.0002 wt.% to 0.025 wt.%; and the most preferred concentration ranges from 0.002 wt.% to 0.01 wt.%

[0054] Optionally, acidic or basic compounds or pH adjusting agents can be used to allow pH of Cu bulk CMP polishing compositions being adjusted to the optimized pH value,

[0055] The pH adjusting agents include, but are not limited to, the following: nitric acid, hydrochloric acid, sulfuric acid, phosphoric acid, other inorganic or organic acids, and mixtures thereof. pH adjusting agents also include the basic pH adjusting agents, such as sodium hydride, potassium hydroxide, ammonium hydroxide, tetraalkyl ammonium hydroxide, organic amines, and other chemical reagents that are able to be used to adjust pH towards the more alkaline direction.

[0056] The CMP slurry contains 0 wt.% to 1 wt.% pH adjusting agent; the preferred concentration ranges from 0.01 wt.% to 0.5 wt.%; and the most preferred concentration ranges from 0.1 wt.% to 0.25 wt.%

[0057] pH of the Cu polishing compositions is from about 3.0 to about 12.0; preferred pH range is from 5.5 to 7.5; and the most preferred pH range is from 7.0 to 7.35.

[0058] The CMP slurry contains 0.1 wt.% to 18 wt.% of three chelators; the preferred concentration ranges from 0.5 wt.% to 10 wt.%; and the most preferred concentration ranges from 1.0 wt.% to 2.5 wt.%.


[0059] The three chelators are selected from the group consisting of amino acids, amino acid derivatives, organic amine, and combinations therefor; wherein at least one chelator is an amino acid or an amino acid derivative. For example, the three or tris - chelators, can be the combination of any three amino acids, three amino acid derivatives, or two amino acids plus one organic amine, or one amino acid plus one amino acid derivative plus one organic amine, or two

organic amines plus one amino acid, and or two organic amines plus one amino acid derivative. As a specific example, the tris chelators can be glycine, alanine and ethylenediamine.

[0060] The three chelators used as complexing agents to maximize their reactions with the oxidized Cu film surfaces to form softer Cu-chelator layers to be quickly removed during Cu CMP process thus achieving high and tunable Cu removal rates and low copper dishing for the broad or advanced node copper or TSV (Through Silica Via) CMP applications.

[0061] The amino acids and amino acid derivatives included, but not limited to, glycine, D-alanine, L-alanine, DL-alanine, beta-alanine, valine, leucine, isoleucine, phenylamine, proline, serine, threonine, tyrosine, glutamine, asparagine, glutamic acid, aspartic acid, tryptophan, histidine, arginine, lysine, methionine, cysteine, iminodiacetic acid, etc.


[0062] The organic amines chelators have general molecular structures, as depicted below:

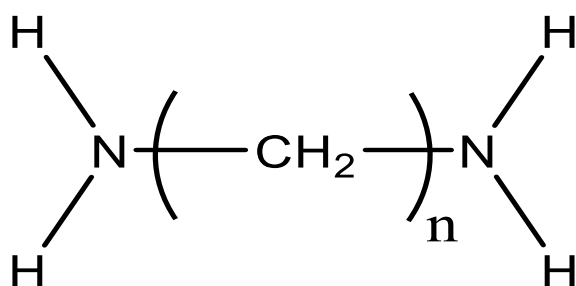

[0063] The organic amine molecules have two primary amine functional groups as terminal groups on both ends of the molecules. n is numbered from 2 to 12, such as ethylenediamine with n = 2, propylenediamine with n=3, butylenediamine with n=4, etc.

[0064] The organic diamine compounds with two primary amine moieties can be described as the binary chelating agents.


[0065] The alkyl group which linked to two terminal primary amine functional groups also include the branched alkyl groups, the general molecular structures of these branched alkyl groups are depicted at followings:

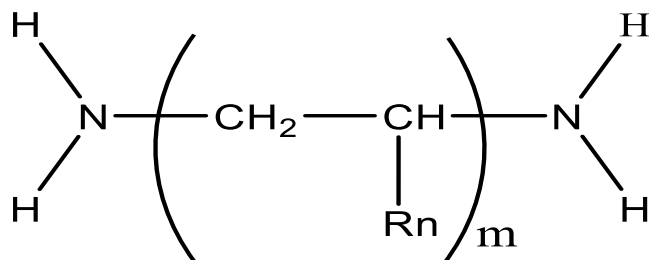


wherein, R_n represents an organic alkyl group with n carbon atoms in which n can be numbered from 1 to 12, m has the numbers ranged from 2 to 12.

[0066] The organic diamine molecules can also have the branched alkyl group as the linking group between two terminal primary amine functional groups.

[0067] Another structure of the organic amine molecules is shown below. R_n and R_m can be the same or different alkyl groups with n carbon atoms and m carbon atoms, respectively; wherein n and m can be numbered from 1 to 12. P can be numbered from 2 to 12.

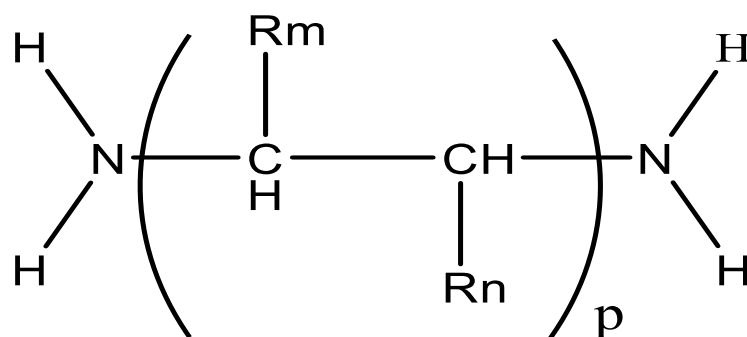


[0068] Another type of the branched alkyl group linker has the following general molecular structure:

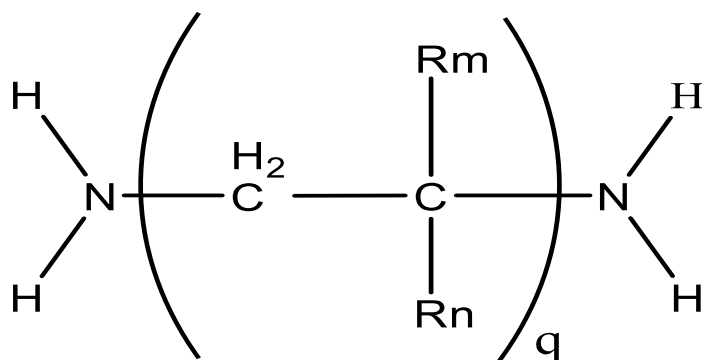

wherein, the Rn and Rm groups are bonded to the same carbon atom. Rn and Rm can be the same or different alkyl groups with n carbon atoms and m carbon atoms, respectively; wherein n and m can be numbered from 1 to 12. q can be numbered from 2 to 12.


[0069] The organic diamine molecules with other molecular structures can be also used as a chelating agent in the invented herein Cu CMP slurries, such as those organic diamine molecules with the following general molecular structures:

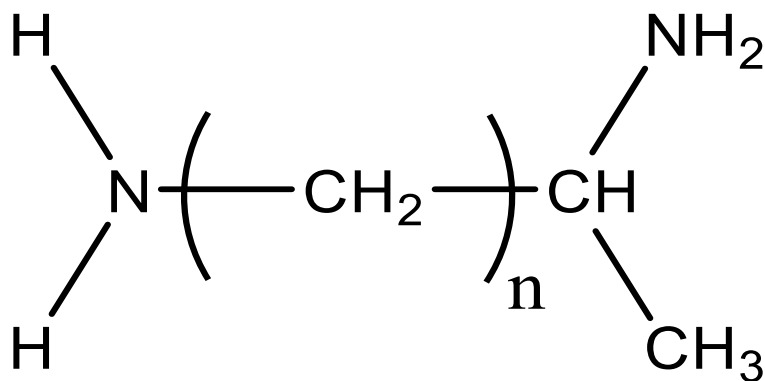


[0070] Such organic diamine molecules can have n numbered independently from 1 to 12 and can be described as organic diamines with one terminal primary amine functional group and another primary organic amine attached to the beta carbon atoms on the other end of the molecules. Also, the secondary primary amine functional groups can be also bonded to the other carbon atoms at other positions, such as beta, gamma etc. and the first primary amine function group still maintains as the terminal primary amine functional group in the same molecules.

[0071] Any other non-aromatic organic diamine molecules with two primary organic amine groups can be used as one of the three chelating agents in the invented Cu CMP slurries herein.

[0072] Optionally, any aromatic organic molecules with two primary amine functional groups can be used as one of three chelating agents in the invented Cu CMP slurries herein. For example, aromatic organic amines have the general molecular structures as depicted in followings:

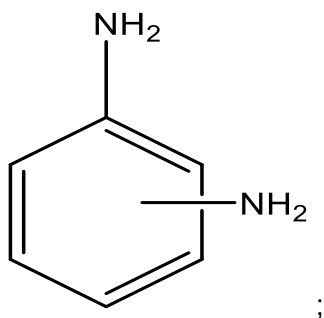

or as followings:

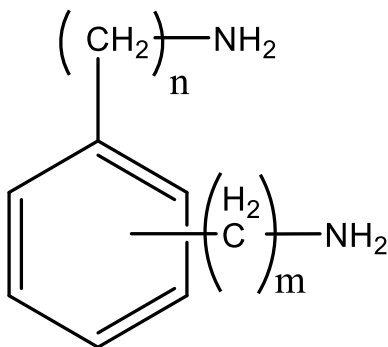

[0073] In the above listed general aromatic organic diamine structures with two primary amine functional groups at ortho or meta positions in which n can be from 1 to 12, and m also can be from 1 to 12, also in the same molecule(s), n can be equal to m . In other cases, n can also be different from m .

[0074] The associated methods described herein entail use of the aforementioned composition for chemical mechanical planarization of substrates comprised of copper. In the

methods, a substrate (e.g., a wafer with Cu surface or Cu plug) is placed face-down on a polishing pad which is fixedly attached to a rotatable platen of a CMP polisher. In this manner, the substrate to be polished and planarized is placed in direct contact with the polishing pad. A wafer carrier system or polishing head is used to hold the substrate in place and to apply a downward pressure against the backside of the substrate during CMP processing while the platen and the substrate are rotated. The polishing composition (slurry) is applied (usually continuously) on the pad during CMP processing to effect the removal of material to planarize the substrate.

[0075] The polishing composition and associated methods described herein are effective for CMP of a wide variety of substrates, including most of substrates having, particularly useful for polishing copper substrates.

Experimental Section

Polishing Pad	Polishing pad, IC1010 pad or Other polishing pad was used during Cu CMP, supplied by Dow Chemicals Company.
---------------	---

PARAMETERS:

Å: angstrom(s) – a unit of length

BP: back pressure, in psi units

CMP: chemical mechanical planarization = chemical mechanical polishing

CS: carrier speed

DF: Down force: pressure applied during CMP, units psi

min: minute(s)

ml: milliliter(s)

mV: millivolt(s)

psi: pounds per square inch

PS: platen rotational speed of polishing tool, in rpm (revolution(s) per minute)

SF: polishing composition flow, ml/min

Removal Rates

Cu RR 1.5 psi Measured Copper removal rate at 1.5 psi down pressure of the CMP tool

Cu RR 2.5 psi Measured Copper removal rate at 2,5 psi down pressure of the CMP tool

General Experimental Procedure

[0076] All percentages are weight percentages unless otherwise indicated. In the examples presented below, CMP experiments were run using the procedures and experimental conditions given below. The CMP tool that was used in the examples is a 300mm LK[®] polisher, or a Mirra[®] polisher, manufactured by Applied Materials, 3050 Boweres Avenue, Santa Clara, California, 95054. An IC1010 pad or other type of polishing pad, supplied by Dow Chemicals Company was used on the platen for the blanket wafer polishing studies. Pads were broken-in by polishing twenty-five dummy oxide (deposited by plasma enhanced CVD from a TEOS precursor, PETEOS) wafers. In order to qualify the tool settings and the pad break-in, two PETEOS monitors were polished with Syton[®] OX-K colloidal silica, supplied by Planarization Platform of Air Products Chemicals Inc. at baseline conditions. Polishing experiments were conducted using blanket Cu wafers with 10.8K Angstroms in thickness, Ta and TEOS blanket wafers. These blanket wafers were purchased from Silicon Valley Microelectronics, 1150 Campbell Ave, CA, 95126.

Working Example

[0077] In following working examples, the Cu slurry composition with single chelator comprised 0.713 wt.% of glycine, 0.0323 wt.% of 1,2,4-triazole, 0.00644 wt.% of high purity colloidal silica, and 0.00018 wt.% of biocide. The Cu slurry# 1 composition with dual chelators comprised 0.5 wt.% of glycine, 0.70625 wt.% of alanine, 0.03525 wt.% of 1,2,4-triazole, 0.01042 wt.% of high purity colloidal silica, and 0.00016 wt.% of biocide. The Cu slurry# 2 composition with tris chelators comprised of 0.5 wt.% of glycine, 0.70625 wt.% of alanine, 0.0012 wt.% of ethylenediamine, 0.00289 wt.% of choline bicarbonate, 0.03525 wt.% of 1,2,4-triazole, 0.01042 wt.% of high purity colloidal silica, and 0.00016 wt.% of biocide.

[0078] All these three listed formulations used 1.0 wt.% of H₂O₂ as oxidizing agent at point of use, respectively. The CMP polishing compositions had a pH between 7.00 to 7.35.

Example 1

[0079] The polish results of using the Cu bulk CMP polishing compositions were listed in Table 1 and depicted in Figure 1.

[0080] The single chelator was glycine, the dual chelators were glycine and alanine (alanine includes DL-Alanine; D-Alanine; and L-Alanine), the tris chelators were glycine, alanine and ethylenediamine, in tris chelators based polishing composition, an organic quaternary ammonium salt, choline bicarbonate, was also being used.

Table 1. The Effects of Tris or Dual Chelator Cu Slurries vs. Single Chelator Cu Slurry on Cu Removal Rates

Sample	Cu Removal ($\text{\AA}/\text{min.}$) at 1.5psi DF	Cu Removal Rate ($\text{\AA}/\text{min.}$) at 2.5psi DF
Cu Slurry with single chelator, Glycine	4047	7319
Cu Slurry# 1 with dual chelators, Glycine + DL-Alanine	4688	8852
Cu Slurry# 2 with tris chelators, Glycine + DL-Alanine + ethylenediamine + Choline Bicarbonate	5070	8863

[0081] The Cu CMP polishing compositions herein afforded high and compatible Cu film removal rates when using tris chelators based Cu CMP polishing compositions

[0082] The dual chelators based Cu slurry provided 16 % higher Cu removal rate at 1.5psi DF than the single chelator based Cu slurry, and 21 % higher Cu removal rate at 2.5psi DF than the single chelator based Cu slurry.

[0083] The tris chelators based Cu slurry provided 25 % higher Cu removal rate at 1.5psi DF than the single chelator based Cu slurry, and 22 % higher Cu removal rate at 2.5psi DF than the single chelator based Cu slurry.

[0084] Also the tris chelator based Cu slurry provided 8 % higher Cu removal rate at 1.5psi DF than the dual chelators based Cu slurry.

[0085] The increased 8 % Cu removal rate at 1.5psi DF mainly resulted from the use of third chelator, ethylenediamine, which is a binary chelating agent and reacts very effectively with Cu oxides to form water soluble Cu-ethylenediamine complexes and being subsequently removed during Cu CMP process.

Example 2

[0086] The polishing effects of the tris chelator based Cu CMP polishing compositions with/or without choline bicarbonate as an additional additive, and the single chelator based Cu polishing compositions on wide Cu line feature dishing were shown in Table 2, and depicted in Figure 2 and Figure 3.

Table 2. Wide Cu Line Dishing: Single Chelator Cu Slurry vs Tris Chelator Cu Slurries

Sample	Averaged Cu Dishing (Å) on 50x50μM	Averaged Cu Dishing (Å) on 10x10μM	Averaged Cu Dishing (Å) on 9x1μM
Cu Slurry#1 with single chelator, Glycine	1135	624	737
Cu Slurry# 2 with tris chelators, Glycine + DL-Alanine + EDA	493	270	434
Cu Slurry# 3 with tris chelators, Glycine + DL-Alanine + EDA + CBC	441	209	446

EDA: Ethylenediamine; CBC: Choline Bicarbonate

[0087] As the wide Cu line dishing data showed in Table 2, Cu slurry with tris chelators, glycine/alanine/ethylenediamine provided much lower Cu dishing on wide Cu line features than the Cu slurry only using single chelator, glycine.

[0088] On 50x50 μ M Cu line feature, the averaged Cu dishing of tris chelators based Cu slurry was reduced by 56.6wt.% than the Cu slurry only using single chelator, glycine. On 10x10 μ M Cu line feature, the averaged Cu dishing of tris chelators based Cu slurry was reduced by 56.7 wt.% than the Cu slurry only using single chelator, glycine. And on 9x1 μ M Cu line feature, the averaged Cu dishing of tris chelators based Cu slurry was reduced by 41.1 wt.% than the Cu slurry only using single chelator, glycine.

[0089] Further, the use of choline bicarbonate salt in tris chelators based Cu slurry also led to the Cu line dishing reductions on 50x50 μ M and 10x10 μ M features. The Cu line dishing were reduced by about 11 % and 23 % respectively on 50x50 μ M and 10x10 μ M features with the use of choline bicarbonate in glycine/alanine/ethylenediamine based tris chelator Cu slurry.

[0090] Also, tris chelators based Cu slurry or tris chelators based Cu slurry with choline bicarbonate afforded more uniform Cu line dishing across three wide Cu line feature. The delta of Cu line dishing among 50x50 μ M and 10x10 μ M and 9x1 μ M Cu line features was 511Å for Cu slurry using glycine as single chelator, the delta of Cu line dishing among 50x50 μ M and 10x10 μ M and 9x1 μ M Cu line features was 223Å for Cu slurry using glycine/alanine/ethylenediamine as tris chelators, and the delta of Cu line dishing among 50x50 μ M and 10x10 μ M and 9x1 μ M was 232Å for Cu slurry using glycine/alanine/ethylenediamine as tris chelators plus choline bicarbonate as an addition additive to further reduce Cu line dishing on some sized Cu line features.

Example 3

[0091] The tris chelator based Cu slurry or tris chelator based Cu slurry with choline bicarbonate salt also reduced Cu defect counts significantly compared to the single chelator based Cu slurry. 0.2micron Cu defect count results at 1.5psi DF were listed in Table 3.

[0092] As the Cu defect count data showed in Table 3 and depicted in Figure 4, the Cu defect count was reduced by 56 wt.% for glycine/alanine/ethylenediamine based tris chelator Cu slurry than glycine based single chelator Cu slurry. The Cu defect count was reduced by 66.5 wt.% for glycine/alanine/ethylenediamine based tris chelator + choline bicarbonate Cu slurry compared to glycine based single chelator Cu slurry. In other words, Cu defect counts were reduced by 2.2X to 3X in tris chelators or tris chelators plus choline bicarbonate based Cu slurries compared to the single chelator based Cu slurry.

Table 3. Cu Defect Count Comparison of Single Chelator vs Tris Chelator Cu Slurries

Sample	0.2μm Cu Defect@.15psi DF
Cu Slurry with single chelator, Glycine	313
Cu Slurry# 2 with tris chelators, Glycine + DL-Alanine + EDA	138
Cu Slurry# 2 with tris chelators, Glycine + DL-Alanine + EDA + CBC	105

[0093] The use of choline bicarbonate as additional additive in the tris chelator based Cu slurry not only reduced Cu dishing on some wide Cu line features, but also further reduced Cu defect count by 24 wt.% compared to the tris chelators based Cu slurry.

[0094] The tris chelators based Cu CMP slurry or tris chelators with choline salt based Cu slurry showed very high selectivity toward barrier films or dielectric films. For example, greater than 500:1 of Cu: Ta selectivity was obtained for the tris chelators based Cu CMP slurry or tris chelators plus choline salt based Cu slurry.

[0095] While the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications, and variations will be apparent to those skilled in the art in light of the foregoing description. Accordingly, departures may be made from such details without departing from the spirit or scope of the general inventive concept.

CLAIMS

1. A copper chemical mechanical polishing (CMP) composition comprising:


- a) 0.0025 wt.% to 25 wt.% abrasive selected from the group consisting of colloidal silica or high purity colloidal silica; the colloidal silica particles doped by other metal oxide within lattice of the colloidal silica; colloidal aluminum oxide including alpha-, beta-, and gamma-types of aluminum oxides; colloidal and photoactive titanium dioxide; cerium oxide; colloidal cerium oxide; nano-sized inorganic metal oxide particles; nano-sized diamond particles; nano-sized silicon nitride particles; mono-modal, bi-modal, multi-modal colloidal abrasive particles; organic polymer-based soft abrasive; surface-coated or modified abrasive; composite particles; and combinations thereof;
- b) 0.1 wt. % to 18.0 wt. % three chelators selected from the group consisting of amino acid, amino acid derivative, organic amine, and combinations thereof; wherein at least one chelator is an amino acid or an amino acid derivative;
- c) 0.005 wt.% to 0.5 wt.% corrosion inhibitor;
- d) 0.0005 wt.% to 0.25 wt.% organic quaternary ammonium salt which is a choline salt formed between choline and other anionic counter ions;
- e) 0.1 wt.% to 10 wt.% oxidizing agent;
- f) 0.0001 wt.% to 0.05 wt.% biocide;
- g) 0 wt.% to 1 wt.% pH adjusting agent; and
- h) water;

the composition has a pH from 3.0 to 12.0;

wherein


the amino acid or the amino acid derivative is selected from the group consisting of glycine, D-alanine, L-alanine, DL-alanine, beta-alanine, valine, leucine, isoleucine, phenylamine, proline, serine, threonine, tyrosine, glutamine, asparagine, glutamic acid, aspartic acid, tryptophan, histidine, arginine, lysine, methionine, cysteine, iminodiacetic acid, and combinations thereof; and

the organic amine has a general molecular structure selected from the group consisting of:

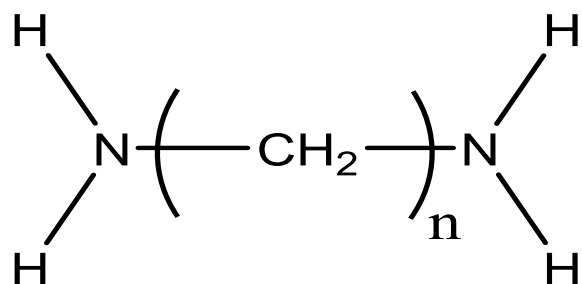


(a)

wherein n is from 2 to 12;

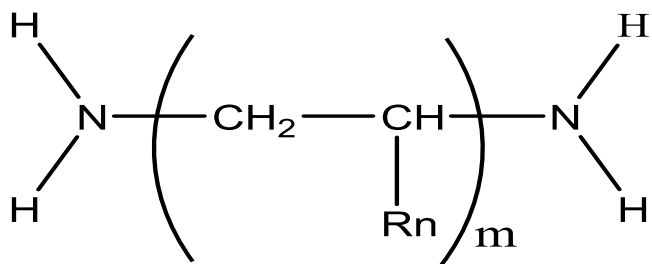


(b)

wherein R_n represents an organic alkyl group with n carbon atoms, n is from 1 to 12 and m is from 2 to 12;

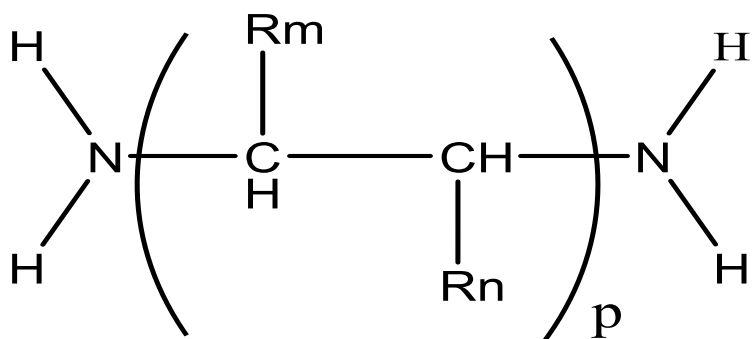


(c)

wherein R_n and R_m can be the same or different alkyl groups with n carbon atoms and m carbon atoms respectively, n and m are numbered independently from 1 to 12, and p is from 2 to 12;

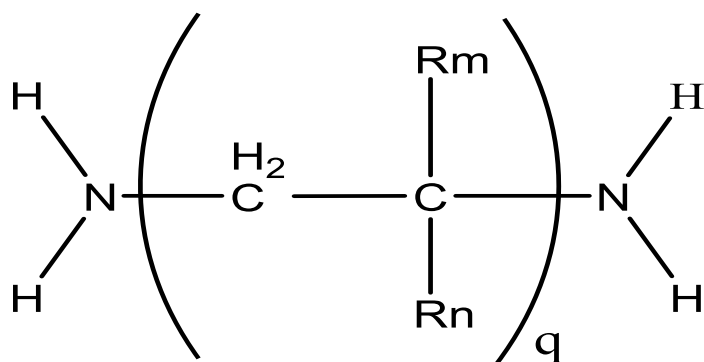


(d)

wherein R_n and R_m can be the same or different alkyl groups with n carbon atoms and m carbon atoms respectively, n and m are numbered independently from 1 to 12, and q is from 2 to 12;

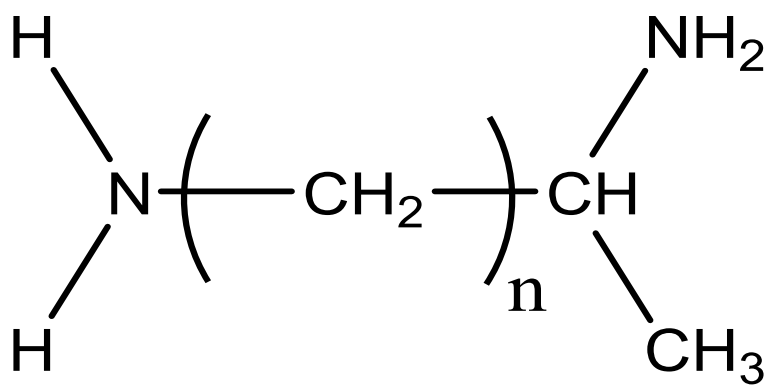


(e)

wherein n is from 1 to 12;

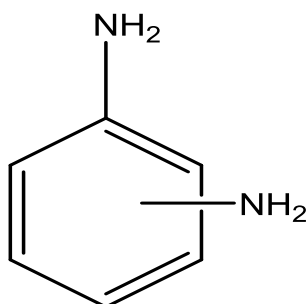


(f);

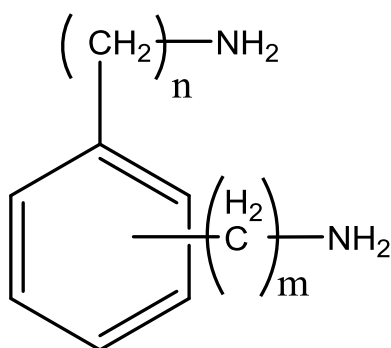

(g)

wherein n and m is numbered independently from 1 to 12;
and combinations thereof.

2. The copper chemical mechanical polishing (CMP) composition of claim 1, wherein the choline salt has a general molecular structure shown below:

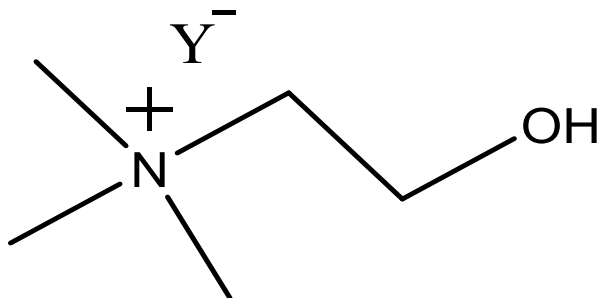

wherein anion Y⁻ can be bicarbonate, hydroxide, p-toluene-sulfonate, or bitartate; the corrosion inhibitor is selected from the group consisting of 1,2,4-triazole, benzotriazole and benzotriazole derivatives, tetrazole and tetrazole derivatives, imidazole and imidazole derivatives, benzimidazole and benzimidazole derivatives, pyrazole and pyrazole derivatives, tetrazole and tetrazole derivatives, and combinations thereof;

the oxidizing agent is selected from the group consisting of periodic acid, hydrogen peroxide, potassium iodate, potassium permanganate, ammonium persulfate, ammonium molybdate, ferric nitrate, nitric acid, potassium nitrate, and combinations thereof;

the biocide has an active ingredient selected from the group consisting of 5-chloro-2-methyl-4-isothiazolin-3-one, 2-methyl-4-isothiazolin-3-one, and combinations thereof; and

the pH adjusting agent is either (1) selected from the group consisting of nitric acid, hydrochloric acid, sulfuric acid, phosphoric acid, and combinations thereof for adjusting pH toward acidic; or (2) selected from the group consisting of sodium hydride, potassium hydroxide, ammonium hydroxide, tetraalkyl ammonium hydroxide, organic amine, and combinations thereof for adjusting pH toward alkaline.

3. The copper chemical mechanical polishing (CMP) composition of claim 1, wherein the organic amine is selected from the group consisting of ethylenediamine, propylenediamine, butylenediamine, and the combinations thereof.
4. The copper chemical mechanical polishing (CMP) composition of claim 1, wherein the three chelators are selected from (1) one of the organic amine selected from the group consisting of ethylenediamine, propylenediamine, and butylenediamine; and (2) two of different amino acids, two of different amino acid derivatives, or combinations of one amino acid with one amino derivative.
5. The copper chemical mechanical polishing (CMP) composition of claim 1, comprising
0.0025 wt.% to 2.5 wt.% of colloidal silica or high purity colloidal silica;
0.5 wt. % to 10.0 total wt. % of (1) one of the organic amine selected from the group consisting of ethylenediamine, propylenediamine, and butylenediamine; and (2) two of the amino acids, two of the amino acid derivatives, or combinations of one of the amino acid with one of the amino derivative; wherein the two amino acids are different and the two of the amino acid derivatives are different;
0.001 wt. % to 0.05 wt. % of choline bicarbonate salt; and
the composition has a pH from 5.5 to 7.5.
6. The copper chemical mechanical polishing (CMP) composition of claim 1, comprising
0.0025 wt.% to 2.5 wt.% of colloidal silica or high purity colloidal silica;
1.0 to 2.5 total wt. % of (1) one organic amine selected from ethylenediamine propylenediamine, and butylenediamine; and (2) two different amino acids selected from the group consisting of glycine, D-alanine, L-alanine, DL-alanine, beta-alanine, and other amino acids and their derivatives;
0.001 wt. % to 0.05 wt. % of choline bicarbonate salt; and
the composition has a pH from 5.5 to 7.5.

7. The copper chemical mechanical polishing (CMP) composition of claim 1, comprising
- 0.005 wt.% to 0.15 wt.% of colloidal silica or high purity colloidal silica;
 - 0.5 to 1.5 total wt. % of ethylenediamine; glycine and DL-alanine;
 - 0.002 wt. % to 0.01 wt. % of choline bicarbonate salt;
 - 0.5 wt. % to 2.0 wt. % of periodic acid or hydrogen peroxide;
 - 0.025 wt. % to 0.05 wt. % of 1,2,4-triazole or benzotriazole and benzotriazole derivatives;
 - 0.002 wt. % to 0.010 wt. % of the biocide has an active ingredient selected from the group consisting of 5-chloro-2-methyl-4-isothiazolin-3-one, 2-methyl-4-isothiazolin-3-one, and combinations thereof; and
 - the composition has a pH from 7.0 to 7.35.
8. A method of chemical mechanical polishing a semiconductor substrate having at least one surface comprising copper (Cu) or copper-containing material and at least one second material; comprising steps of:
- 1) providing the semiconductor substrate;
 - 2) providing a polish pad;
 - 3) providing a Cu chemical mechanical polishing composition comprising
 - a) 0.0025 wt.% to 25 wt.% abrasive selected from the group consisting of colloidal silica or high purity colloidal silica; the colloidal silica particles doped by other metal oxide within lattice of the colloidal silica; colloidal aluminum oxide including alpha-, beta-, and gamma-types of aluminum oxides; colloidal and photoactive titanium dioxide; cerium oxide; colloidal cerium oxide; nano-sized inorganic metal oxide particles; nano-sized diamond particles; nano-sized silicon nitride particles; mono-modal, bi-modal, multi-modal colloidal abrasive particles; organic polymer-based soft abrasive; surface-coated or modified abrasive; composite particles; and combinations thereof;


- b) 0.1 wt. % to 18.0 wt. % three chelators selected from the group consisting of amino acid, amino acid derivative, organic amine, and combinations thereof; wherein at least one chelator is an amino acid or an amino acid derivative;
- c) 0.005 wt.% to 0.5 wt.% corrosion inhibitor;
- d) 0.0005 wt.% to 0.25 wt.% organic quaternary ammonium salt which is a choline salt formed between choline and other anionic counter ions;
- e) 0.1 wt.% to 10 wt.% oxidizing agent;
- f) 0.0001 wt.% to 0.05 wt.% biocide;
- g) 0 wt.% to 1 wt.% pH adjusting agent; and
- h) water;

the composition has a pH from 3.0 to 12.0;

wherein


the amino acid or the amino acid derivative is selected from the group consisting of glycine, D-alanine, L-alanine, DL-alanine, beta-alanine, valine, leucine, isoleucine, phenylamine, proline, serine, threonine, tyrosine, glutamine, asparagine, glutamic acid, aspartic acid, tryptophan, histidine, arginine, lysine, methionine, cysteine, iminodiacetic acid, and combinations thereof; and

the organic amine has a general molecular structure selected from the group consisting of:

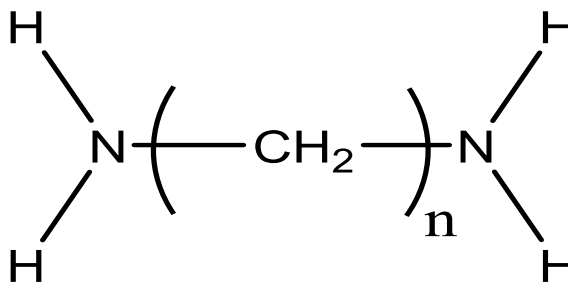


(a)

wherein n is from 2 to 12;

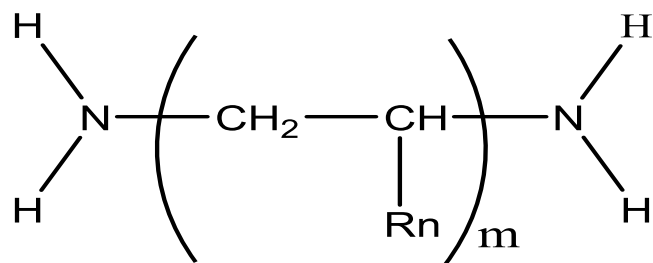


(b)

wherein R_n represents an organic alkyl group with n carbon atoms, n is from 1 to 12 and m is from 2 to 12;

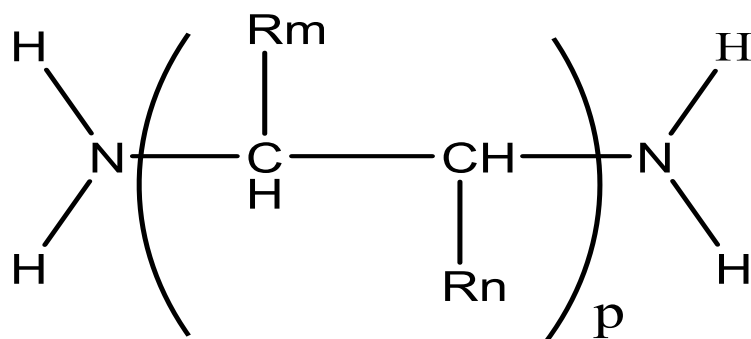


(c)

wherein R_n and R_m can be the same or different alkyl groups with n carbon atoms and m carbon atoms respectively, n and m are numbered independently from 1 to 12, and p is from 2 to 12;

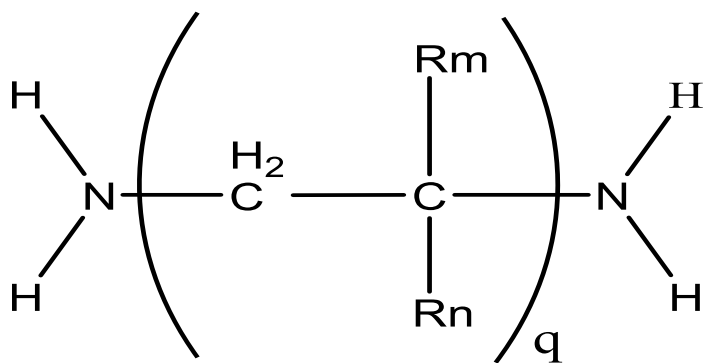


(d)

wherein R_n and R_m can be the same or different alkyl groups with n carbon atoms and m carbon atoms respectively, n and m are numbered independently from 1 to 12, and q is from 2 to 12;

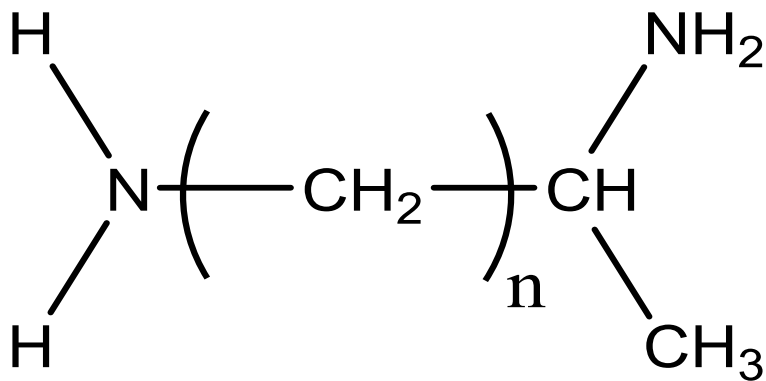


(e)

wherein n is from 1 to 12;

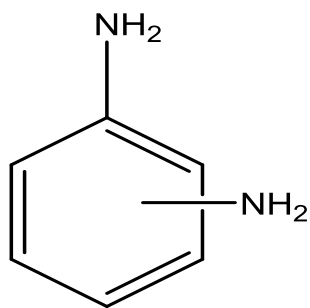

(f);

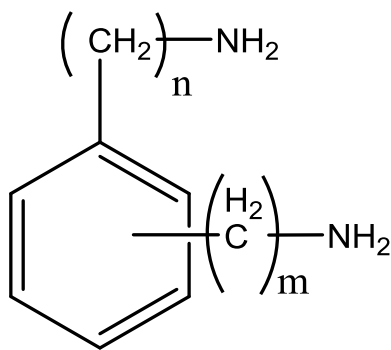

(g)

wherein n and m is numbered independently from 1 to 12;
and combinations thereof;

- 4) contacting the at least one surface with the polish pad and the Cu chemical mechanical polishing composition; and
- 5) polishing the at least one surface to remove copper or copper-containing material;

wherein at least a portion of the at least one surface comprising copper (Cu) or copper-containing material and at least one second material is in contact with both the polishing pad and the Cu chemical mechanical polishing composition.


9. The method for chemical mechanical polishing of Claim 8, wherein

the second material is selected from the group consisting of barrier layer selected from the group consisting of Ta, TaN, Ti, and TiN film; dielectric layer selected from the group consisting of TEOS, low-k; and ultra low-k film; and

removal rate of Cu vs removal rate of the second material is equal or greater than 500:1.

10. The method for chemical mechanical polishing of Claim 8, wherein

the choline salt has a general molecular structure shown below:

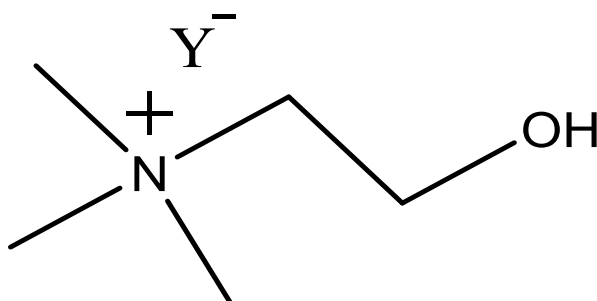

wherein anion Y⁻ can be bicarbonate, hydroxide, p-toluene-sulfonate, or bitartate; the corrosion inhibitor is selected from the group consisting of 1,2,4-triazole, benzotriazole and benzotriazole derivatives, tetrazole and tetrazole derivatives, imidazole and imidazole derivatives, benzimidazole and benzimidazole derivatives, pyrazole and pyrazole derivatives, tetrazole and tetrazole derivatives, and combinations thereof;

the oxidizing agent is selected from the group consisting of periodic acid, hydrogen peroxide, potassium iodate, potassium permanganate, ammonium persulfate, ammonium molybdate, ferric nitrate, nitric acid, potassium nitrate, and combinations thereof;

the biocide has an active ingredient selected from the group consisting of 5-chloro-2-methyl-4-isothiazolin-3-one, 2-methyl-4-isothiazolin-3-one, and combinations thereof; and

the pH adjusting agent is either (1) selected from the group consisting of nitric acid, hydrochloric acid, sulfuric acid, phosphoric acid, and combinations thereof for adjusting pH toward acidic; or (2) selected from the group consisting of sodium hydride, potassium hydroxide, ammonium hydroxide, tetraalkyl ammonium hydroxide, organic amine, and combinations thereof for adjusting pH toward alkaline.

11. The method for chemical mechanical polishing of Claim 8, wherein

the three chelators are selected from (1) one of the organic amine selected from the group consisting of ethylenediamine, propylenediamine, and butylenediamine; and (2) two of different amino acids, two of different amino acid derivatives, or combinations of one amino acid with one amino derivative.

12. The method for chemical mechanical polishing of Claim 8, wherein the Cu chemical mechanical polishing composition comprises

0.0025 wt.% to 2.5 wt.% of colloidal silica or high purity colloidal silica;

0.1 to 18.0 total wt. % of (1) one of the organic amine selected from the group consisting of ethylenediamine, propylenediamine, and butylenediamine; and (2) two of the amino acids, two of the amino acid derivatives, or combinations of one of the amino acid with one of the amino derivative; wherein the two amino acids are different and the two of the amino acid derivatives are different;

0.001 wt. % to 0.05 wt. % of choline bicarbonate salt; and

the composition has a pH from 5.5 to 7.5.

13. The method for chemical mechanical polishing of Claim 8, wherein the Cu chemical mechanical polishing composition comprises

0.0025 wt.% to 2.5 wt.% of colloidal silica or high purity colloidal silica;

0.5 to 1.5 total wt. % of (1) one organic amine selected from ethylenediamine propylenediamine, and butylenediamine; and (2) two different amino acids selected from the group consisting of glycine, D-alanine, L-alanine, DL-alanine, beta-alanine, and other amino acids and their derivatives;

0.001 wt. % to 0.05 wt. % of choline bicarbonate salt; and

the composition has a pH from 5.5 to 7.5.

14. The method for chemical mechanical polishing of Claim 8, wherein the Cu chemical mechanical polishing composition comprises

0.005 wt.% to 0.15 wt.% of colloidal silica or high purity colloidal silica;

0.5 to 1.5 total wt. % of ethylenediamine; glycine and DL-alanine;

0.002 wt. % to 0.01 wt. % of choline bicarbonate salt;

0.5 wt. % to 2.0 wt. % of periodic acid or hydrogen peroxide;

0.025 wt. % to 0.05 wt. % of 1,2,4-triazole or benzotriazole and benzotriazole derivatives;

0.002 wt. % to 0.010 wt. % of the biocide has an active ingredient selected from the group consisting of 5-chloro-2-methyl-4-isothiazolin-3-one, 2-methyl-4-isothiazolin-3-one, and combinations thereof; and

the composition has a pH from 7.0 to 7.35.

15. A system for chemical mechanical polishing a semiconductor substrate having at least one surface comprising copper (Cu) or copper-containing material and at least one second material, the system comprising:

1) a polish pad; and

2) a Cu chemical mechanical polishing composition comprising


- a) 0.0025 wt.% to 25 wt.% abrasive selected from the group consisting of colloidal silica or high purity colloidal silica; the colloidal silica particles doped by other metal oxide within lattice of the colloidal silica; colloidal aluminum oxide including alpha-, beta-, and gamma-types of aluminum oxides; colloidal and photoactive titanium dioxide; cerium oxide; colloidal cerium oxide; nano-sized inorganic metal oxide particles; nano-sized diamond particles; nano-sized silicon nitride particles; mono-modal, bi-modal, multi-modal colloidal abrasive particles; organic polymer-based soft abrasive; surface-coated or modified abrasive; composite particles; and combinations thereof;
- b) 0.1 wt. % to 18.0 wt. % three chelators selected from the group consisting of amino acid, amino acid derivative, organic amine, and combinations thereof; wherein at least one chelator is an amino acid or an amino acid derivative;
- c) 0.005 wt.% to 0.5 wt.% corrosion inhibitor;
- d) 0.0005 wt.% to 0.25 wt.% organic quaternary ammonium salt which is a choline salt formed between choline and other anionic counter ions;
- e) 0.1 wt.% to 10 wt.% oxidizing agent;
- f) 0.0001 wt.% to 0.05 wt.% biocide;
- g) 0 wt.% to 1 wt.% pH adjusting agent; and
- h) water;

the composition has a pH from 3.0 to 12.0;

wherein


the amino acid or the amino acid derivative is selected from the group consisting of glycine, D-alanine, L-alanine, DL-alanine, beta-alanine, valine, leucine, isoleucine, phenylamine, proline, serine, threonine, tyrosine, glutamine, asparagine, glutamic acid, aspartic acid, tryptophan, histidine, arginine, lysine, methionine, cysteine, iminodiacetic acid, and combinations thereof; and

the organic amine has a general molecular structure selected from the group consisting of:

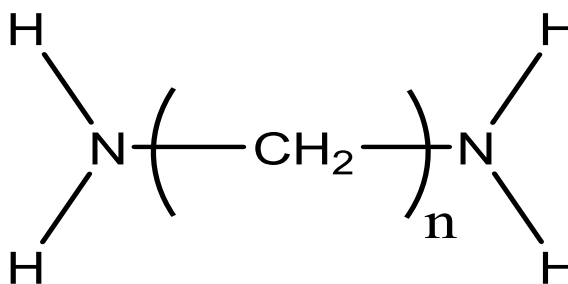


(a)

wherein n is from 2 to 12;

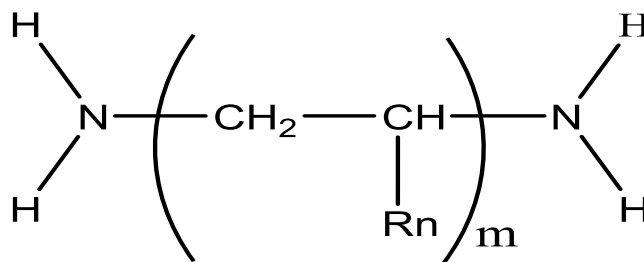


(b)

wherein R_n represents an organic alkyl group with n carbon atoms, n is from 1 to 12 and m is from 2 to 12;

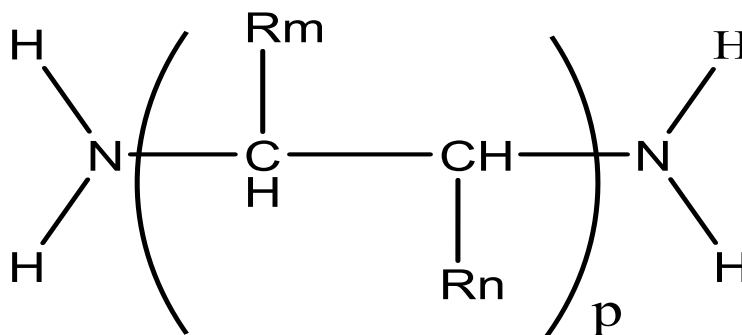


(c)

wherein R_n and R_m can be the same or different alkyl groups with n carbon atoms and m carbon atoms respectively, n and m are numbered independently from 1 to 12, and p is from 2 to 12;

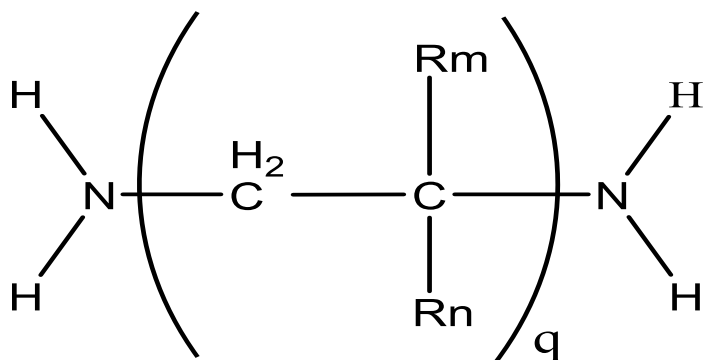


(d)

wherein R_n and R_m can be the same or different alkyl groups with n carbon atoms and m carbon atoms respectively, n and m are numbered independently from 1 to 12, and q is from 2 to 12;

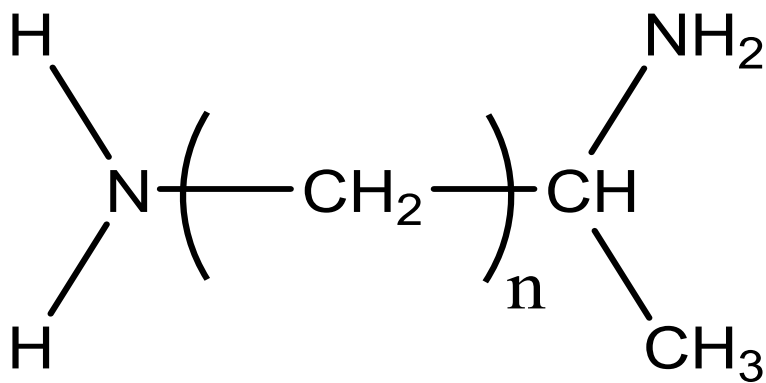


(e)

wherein n is from 1 to 12;

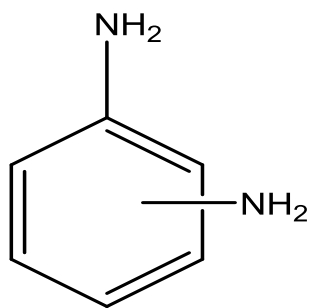

(f);

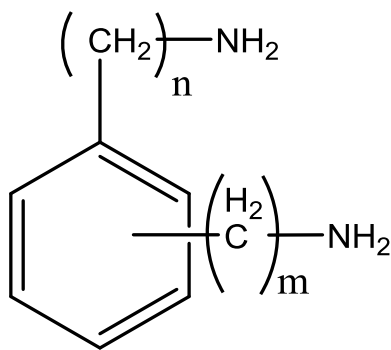

(g)

wherein n and m is numbered independently from 1 to 12;
and combinations thereof;


wherein at least a portion of the at least one surface comprising copper (Cu) or copper-containing material and at least one second material is in contact with both the polishing pad and the Cu chemical mechanical polishing composition.

16. The system for chemical mechanical polishing of Claim 15, wherein

the three chelators are selected from (1) one of the organic amine selected from the group consisting of ethylenediamine, propylenediamine, and butylenediamine; and (2) two of different amino acids, two of different amino acid derivatives, or combinations of one amino acid with one amino derivative.

17. The system for chemical mechanical polishing of Claim 15, wherein

the choline salt has a general molecular structure shown below:

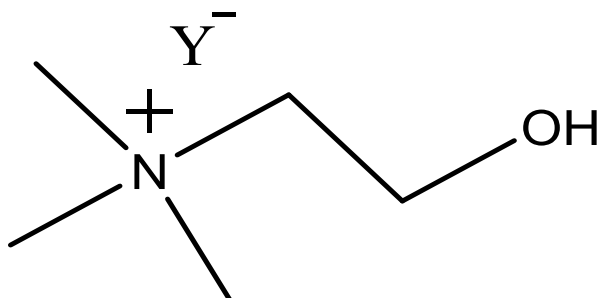

wherein anion Y^- can be bicarbonate, hydroxide, p-toluene-sulfonate, or bitartate; the corrosion inhibitor is selected from the group consisting of 1,2,4-triazole, benzotriazole and benzotriazole derivatives, tetrazole and tetrazole derivatives, imidazole and imidazole derivatives, benzimidazole and benzimidazole derivatives, pyrazole and pyrazole derivatives, tetrazole and tetrazole derivatives, and combinations thereof;

the oxidizing agent is selected from the group consisting of periodic acid, hydrogen peroxide, potassium iodate, potassium permanganate, ammonium persulfate, ammonium molybdate, ferric nitrate, nitric acid, potassium nitrate, and combinations thereof;

the biocide has an active ingredient selected from the group consisting of 5-chloro-2-methyl-4-isothiazolin-3-one, 2-methyl-4-isothiazolin-3-one, and combinations thereof; and

the pH adjusting agent is either (1) selected from the group consisting of nitric acid, hydrochloric acid, sulfuric acid, phosphoric acid, and combinations thereof for adjusting pH toward acidic; or (2) selected from the group consisting of sodium hydride, potassium hydroxide, ammonium hydroxide, tetraalkyl ammonium hydroxide, organic amine, and combinations thereof for adjusting pH toward alkaline.

18. The system for chemical mechanical polishing of Claim 15, wherein the Cu chemical mechanical polishing composition comprises

0.0025 wt.% to 2.5 wt.% of colloidal silica or high purity colloidal silica;

0.1 to 18.0 total wt. % of (1) one of the organic amine selected from the group consisting of ethylenediamine, propylenediamine, and butylenediamine; and (2) two of the amino acids, two of the amino acid derivatives, or combinations of one of the amino acid with one of the amino derivative; wherein the two amino acids are different and the two of the amino acid derivatives are different;

0.001 wt. % to 0.05 wt. % of choline bicarbonate salt; and

the composition has a pH from 5.5 to 7.5.

19. The system for chemical mechanical polishing of Claim 15, wherein the Cu chemical mechanical polishing composition comprises

0.0025 wt.% to 2.5 wt.% of colloidal silica or high purity colloidal silica;

0.5 to 1.5 total wt. % of (1) one organic amine selected from ethylenediamine propylenediamine, and butylenediamine; and (2) two different amino acids selected from the group consisting of glycine, D-alanine, L-alanine, DL-alanine, beta-alanine, and other amino acids and their derivatives;

0.001 wt. % to 0.05 wt. % of choline bicarbonate salt; and

the composition has a pH from 5.5 to 7.5.

20. The system for chemical mechanical polishing of Claim 15, wherein the Cu chemical mechanical polishing composition comprises

0.005 wt.% to 0.15 wt.% of colloidal silica or high purity colloidal silica;

0.5 to 1.5 total wt. % of ethylenediamine; glycine and DL-alanine;

0.002 wt. % to 0.01 wt. % of choline bicarbonate salt;

0.5 wt. % to 2.0 wt. % of periodic acid or hydrogen peroxide;

0.025 wt. % to 0.05 wt. % of 1,2,4-triazole or benzotriazole and benzotriazole derivatives;

0.002 wt. % to 0.010 wt. % of the biocide has an active ingredient selected from the group consisting of 5-chloro-2-methyl-4-isothiazolin-3-one, 2-methyl-4-isothiazolin-3-one, and combinations thereof; and

the composition has a pH from 7.0 to 7.35.