



(43) International Publication Date
6 February 2014 (06.02.2014)

- (51) International Patent Classification:
E04G 11/48 (2006.01) *E04G 1/14* (2006.01)
- (21) International Application Number:
PCT/AU2013/000855
- (22) International Filing Date:
2 August 2013 (02.08.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2012903312 2 August 2012 (02.08.2012) AU
- (71) Applicant: **FORM 700 PTY LTD** [AU/AU]; 270 Blackshaws Road, Altona North, Victoria 3025 (AU).
- (72) Inventor: **ROSATI, Emilio**; 20 Devonshire Road, Rossmore, NSW 2171 (AU).
- (74) Agent: **MADDERN'S**; GPO Box 2752, Adelaide, South Australia 5001 (AU).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FORMWORK SUPPORT ELEMENT

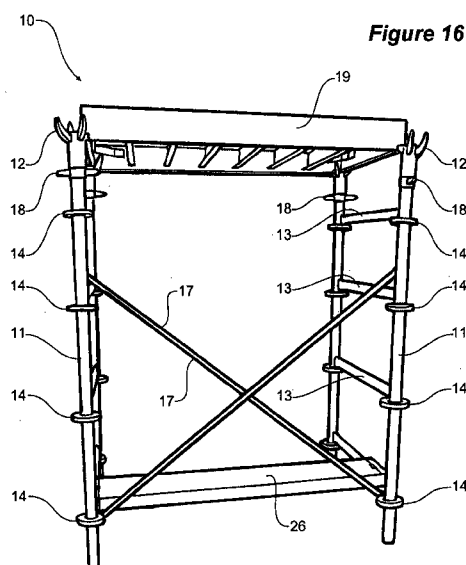

(57) Abstract: This invention relates to a formwork support member, and a scaffold structure formed from at least a pair of adjacent formwork support members. The formwork support member comprises at least two spaced vertical members, at least one connecting member bridging said vertical members to form thereby a rigid formwork support member, each vertical member including a plurality of attachment means at spaced intervals there- along for releasable attachment thereto of at least one brace member extending between adjacent formwork support members to form the scaffold structure.